MediaLedger

User Manual

Every page, dialog and setting, with numbered screenshots

Version	Build date	Document date
3.0.0	2026-10-12	2026-10-11

MediaLedger inventories the video files on a network share, tracks what changes between scans, finds what is missing or weak, and keeps your corrections. It runs as a Windows desktop application and as a web server on a Raspberry Pi; both show the same pages.

The screenshots in this manual show a fictional library generated for the purpose. No title, person or address in them is real.

Contents

Contents 2
1. Installing and first launch 5
1.1 System requirements 5
1.2 Installing the desktop application 5
1.3 Installing the web server on a Raspberry Pi 5
1.4 First launch 6
1.4.1 Welcome guide 6
2. The interface 10
2.1 The sidebar in full 11
2.2 The three ways MediaLedger runs 12
2.3 Colour themes 13
3. Library 14
3.1 Dashboard 14
3.2 Dashboard, edit mode 17
3.3 Add a card dialog 18
3.4 Card options dialog 20
3.5 TV Shows 21
3.6 Poster wall view 23
3.7 Poster wall: details card 24
3.8 Series page (episodes) 26
3.9 Movies 27
3.10 Movie page (versions) 28
3.11 Web videos 29
3.12 Adult library 30
3.13 Collections 31
3.14 A collection 33
4. Review 36
4.1 Missing episodes 36
4.2 Match dialog 38
4.3 Collect dialog 40
4.4 Issues: Problems 41
4.5 Fix dialog 43
4.6 Issues: Duplicates 44
4.7 Issues: Subtitles 46

4.8 Quality 47
4.9 Upgrade candidates 49
4.10 Reclaim space 50
4.11 Ratings 51
4.12 Watch tonight 52
4.13 Watched 54
4.14 Requests 56
4.15 Request page for phones 58
5. Maintenance 61
5.1 Change log 61
5.2 Movie names 62
5.3 Rename TV / anime 65
5.4 Rename confirmation dialog 67
5.5 CSV export 68
6. Application 71
6.1 System 71
6.2 Family portal (administration) 72
6.3 Invite created, with its QR code 74
6.4 Log 75
6.5 Security 76
6.6 Two-factor setup 79
6.7 About 80
7. Settings 82
7.1 Settings: Appearance and Library roots 82
7.2 Settings: Network shares (Raspberry Pi server) 83
7.3 Connect a network share dialog 85
7.4 Settings: Scanning, ffprobe, lookups and folder watch 86
7.5 Settings: Renaming, adult content, quality thresholds and CSV export 88
7.6 Settings: Schedules 90
7.7 Settings: Data, backups and posters 91
7.8 Restore from a backup dialog 93
7.9 Folder browser dialog (web server) 94
7.10 Settings: Updates and notifications 95
7.11 Settings: Plex 97
8. The family portal 100
8.1 Family portal: Library 100

8.2 Family portal: a series 101
8.3 Family portal: Tonight 103
8.4 Family portal: Requests 104
8.5 Family portal: a request with a lookup 106
8.6 Family portal: Sets 108
8.7 Family portal: Settings 110
8.8 Portal admin: Requests 111
8.9 Portal admin: Invites 113
8.10 Portal admin: Status 115
9. Short dialogs 118
9.1 Confirm it is you (password again) 118
9.2 One at a time 118
9.3 Dry run result 118
9.4 Batch items 118
9.5 Undo batch 118
9.6 Rename movie files, live 119
9.7 Movie batch result 119
9.8 Set source for selected 119
9.9 Ignore the other files 119
9.10 Desktop: connect to a server (Settings, Connections) 119
9.11 Card settings (before version 2.0) 120
10. Common tasks from start to finish 121
10.1 Find and fill the gaps in a series 121
10.2 Tidy the names of a group of episodes 121
10.3 Arrange the Dashboard 122
10.4 Give a family member access 123
10.5 Back up, and restore 124
10.6 Find out why something did not happen 124
11. Settings reference 126
11.1 What is remembered in the browser only 129
12. Keyboard shortcuts 130
13. Troubleshooting and frequently asked questions 131
13.1 Every message in one place 131
14. Glossary 135

Page numbers are filled in when the document is opened in Word, or when it is exported.

1. Installing and first launch

1.1 System requirements

	Desktop application	Web server
Computer	A 64-bit Windows computer. The installer is built for x64 only.	Raspberry Pi 4B or 5 recommended; a Pi 3 works on a 64-bit system but scans slowly. Any Linux computer with Node 22 also works.
Operating system	Windows 10 or 11, 64-bit.	Raspberry Pi OS Lite (64-bit), Trixie or newer. 32-bit is not supported.
Storage	About 300 MB for the application. The database for a library of 25,000 files is about 25 MB; posters about 100 MB.	32 GB microSD (class A2) or a USB solid-state drive.
Network	Access to the share that holds the media.	Ethernet on the same network as the file server. Port 8080 by default.
Also needed	ffprobe (part of ffmpeg). The application offers to download it on first launch.	Installed by the installer: Node 22, ffmpeg, cifs-utils, smbclient, curl, openssl.
Memory and processor	UNVERIFIED: no minimum has been measured. A scan uses one ffprobe process per parallel probe (8 by default).	UNVERIFIED: no minimum has been measured. Runs on a Pi 4 with 4 GB.

1.2 Installing the desktop application

1. Download `medialedger-3.0.0-setup.exe` from the Releases page of the project on GitHub.
2. Run it. The installer needs no questions answered and installs for the current user.
3. Windows may warn that the publisher is unknown, because the installer is not code-signed. Choose **More info**, then **Run anyway**.
4. MediaLedger starts when the installer finishes.

> Data is kept apart from the program, in `%APPDATA%\MediaLedger`. Updating, reinstalling or uninstalling never touches it.

1.3 Installing the web server on a Raspberry Pi

1. Flash Raspberry Pi OS Lite (64-bit) with SSH enabled and start the Pi.
2. Connect over SSH and run the installer:

```
curl -fsSL https://raw.githubusercontent.com/AxialForge/medialedger/main/server/install.sh -o install.sh && sudo bash install.sh
```

1. Type the address of the file server that holds the media, then a user name and password that may read it. The installer lists the shares that server offers.
2. Type the numbers of the shares to use (or `all`). Each is connected under `/mnt/medialedger/`.
3. Choose a web password of at least 8 characters.
4. Open `http://<address of the Pi>:8080` and sign in as `admin`. The welcome guide opens.

> The separate document **Installing MediaLedger on a Raspberry Pi** goes through this step by step, with what the terminal shows at each question.

The installer is safe to run again. It creates a service that starts with the Pi, connects the shares, and installs these commands:

Command	What it does
`sudo medialedger-setup`	The questions again: connect more shares, set the password, show the addresses.
`sudo medialedger-update`	Downloads the newest release, checks it, installs it and restarts. Data is untouched.
`sudo medialedger --set-password`	Sets or resets the web password and signs everyone out.
`sudo bash install.sh --update-only --port=8080`	Moves the service to another port.
`sudo bash install.sh --auto-update`	Adds a nightly update at about 04:30. `--no-auto-update` removes it.

1.4 First launch

A new installation opens the **welcome guide** instead of an empty Dashboard. It is one page with four steps:

1. **Connect your storage.** On the Raspberry Pi server, sign in to the file server and tick its shares. On the desktop application there is nothing to connect.
2. **Point at the folders.** Pick the folder for TV shows, for Anime and for Movies with **Browse**, or press **Find them for me**. Press **Save and check the folders**.
3. **Check.** Every line should show a tick: ffprobe is installed, and each folder can be read.
4. **First scan.** Press **Start the first scan**. It reads and measures every file, which takes a while; later scans only read what changed.
5. Press **Finish and open the dashboard**. Optional next: connect Plex, and set a backup folder, both under **Settings**.

1.4.1 Welcome guide

The first page of a new installation. It takes a new server from nothing to a first scan on one page, and can be opened again at any time from Settings, Library.

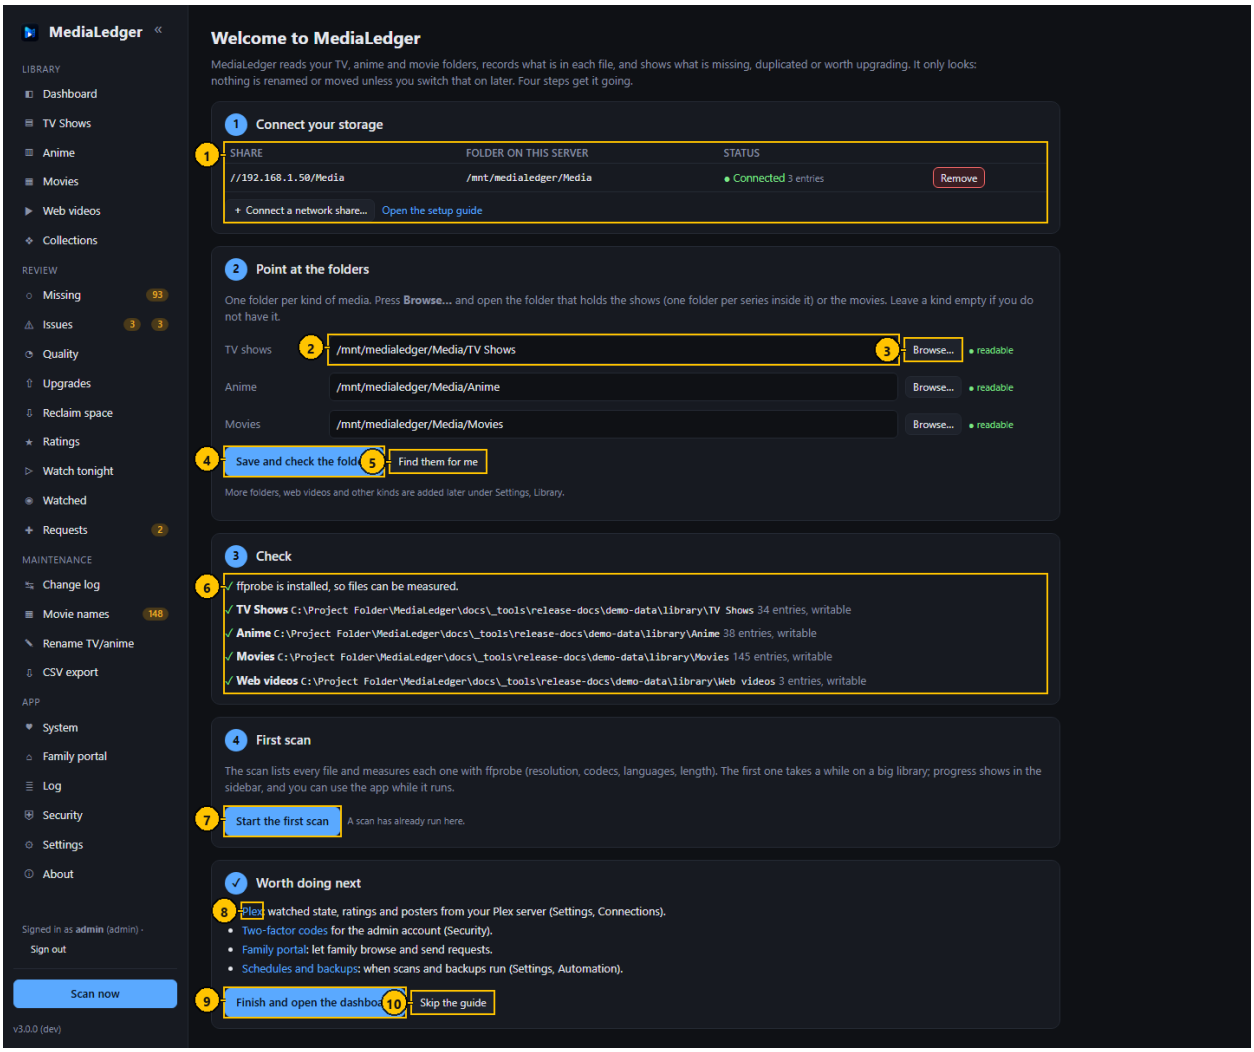


Figure 1. Welcome guide. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Connected shares	Table	The same list and buttons as Settings, Network shares.	–	–	On the desktop application this step is an explanation only.
2	Folder	Text field	The folder that holds that kind of media: one folder per series, or the movies.	A path on the server.	the saved root of that kind	One field each for TV shows, Anime and Movies.
3	Browse	Button	Opens the folder browser.	–	–	–
4	Save and check the folders	Button	Saves the three folders as library roots and checks each can be read.	–	–	Roots of other kinds are kept.
5	Find them for me	Button	Fills the fields from folders named like TV, Shows, Series, Anime, Movies or Films inside the connected shares.	–	–	Check the result before saving.
6	Check	Status	Whether ffprobe is installed and whether each folder can be read, with the number of entries.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
7	Start the first scan	Button	Starts a scan. Progress shows in the sidebar.	–	–	–
8	Worth doing next	Link	Shortcuts to Plex, two-factor codes, the family portal and the schedules.	–	–	–
9	Finish and open the dashboard	Button	Marks the guide as done and opens the Dashboard.	–	–	–
10	Skip the guide	Button	Marks the guide as done without doing the steps.	–	–	–

Typical workflow

1. Step 1: connect the file server (Raspberry Pi server only).
2. Step 2: pick the folder for TV shows, for Anime and for Movies, or press Find them for me. Press Save and check the folders.
3. Step 3: read the check. Every line should have a tick.
4. Step 4: press Start the first scan.
5. Press Finish and open the dashboard.

Features

- Opens by itself while no scan has ever run and the guide has not been finished or skipped.
- Find them for me looks one and two levels into each connected share for folders with the usual names.
- A kind you do not have is simply left empty.

Edge cases

- Only an administrator sees the guide.
- Skip the guide and Finish do the same thing: they stop it opening by itself. Nothing else is lost by skipping.
- More folders, web videos and other kinds are added afterwards on the Settings page.

Messages and what they mean

Message	Meaning and what to do
`Connect a share first (step 1)`	Find them for me has nowhere to look yet.
`No folders with the usual names. Use Browse…`	The folders are named differently; pick them by hand.
`Saved, but check step 3`	At least one folder could not be read. Step 3 says which.

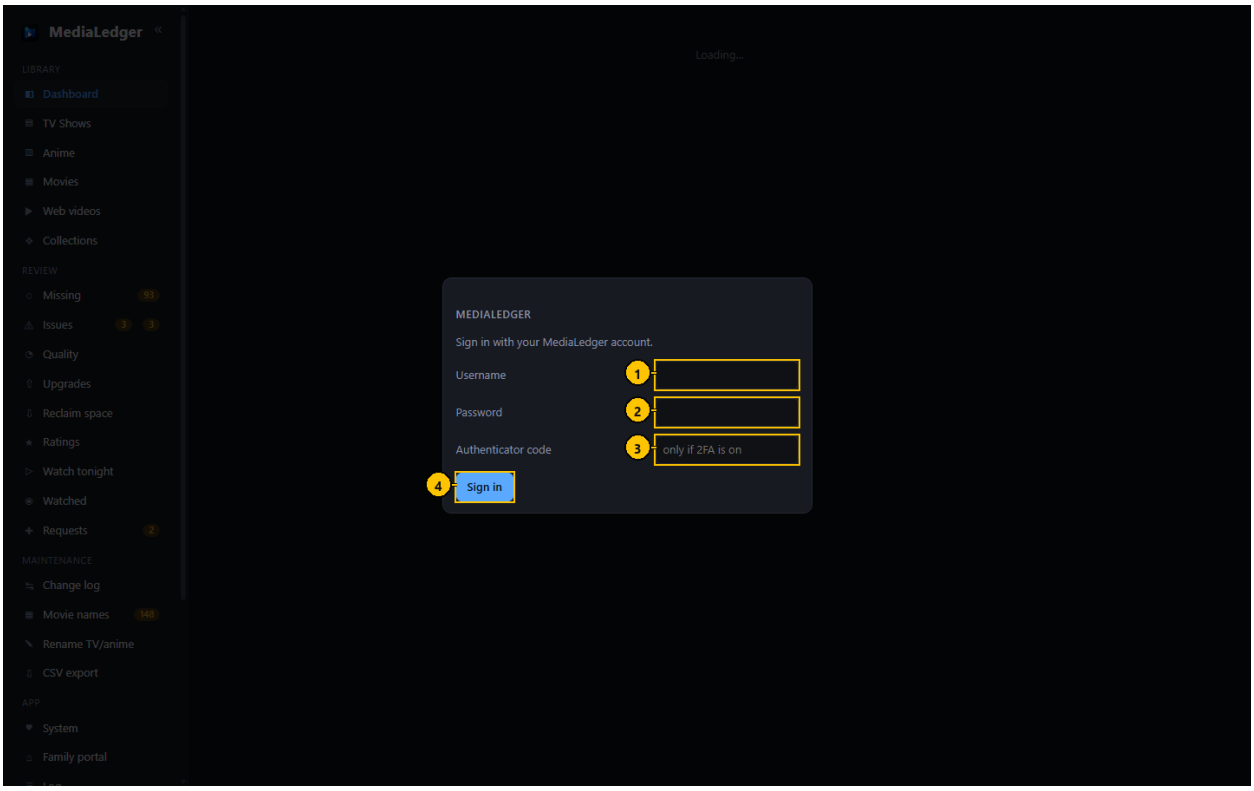


Figure 2. The sign-in dialog of the web server.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	User name	Text field	The account to sign in as.	Letters, digits, dot, dash and underscore; not case sensitive.	admin	The installer creates the account "admin".
2	Password	Password field	The password of that account.	At least 8 characters.	empty	Never stored in the browser by the application.
3	Authenticator code	Text field	The six-digit code, when two-factor codes are on.	6 digits	empty	Leave empty when two-factor codes are off.
4	Sign in	Button	Checks the pair and opens a session.	–	–	Pressing Enter in either field does the same.

Messages and what they mean

Message	Meaning and what to do
`Wrong user name or password`	The pair did not match an account. The attempt is counted towards the lockout.
`Too many failed attempts; this address is locked for 15 minutes`	Wait, or sign in from another address. The lockout is per address, not per account.
`No account exists yet. On the server run: sudo medialedger --set-password`	The server has never had a password set. Run the command on the Raspberry Pi.
`Enter the 6-digit code from your authenticator`	The password was right; two-factor codes are on and the code is the second step.

2. The interface

Everything happens in one window: a sidebar on the left that never changes, and the page you chose on the right. The desktop application and the web server show the same window; a few buttons that open folders exist only on the desktop.



Figure 3. The main window. The numbers match the table below.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Application name	Label	Shows which application this is. Not clickable.	–	–	–
2	Library group	Navigation	Dashboard, TV Shows, Anime, Movies and Web videos: what is in the library.	–	Dashboard	The page you were last on is highlighted.
3	Review group	Navigation	Missing, Issues, Quality, Upgrades, Reclaim space, Ratings, Watch tonight, Watched and Requests.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
4	Count pill	Indicator	How many items wait on that page: missing episodes, open problems, duplicates, pending requests, movie names to tidy.	–	hidden when zero	Amber for attention, red for a fault.
5	Maintenance group	Navigation	Change log, Movie names, Rename TV/anime and CSV export.	–	–	The two rename pages are the only ones that write to the share.
6	App group	Navigation	System, Family portal, Log, Security, Settings and About.	–	–	–
7	Scan now	Button	Starts a scan of every enabled library root.	–	–	Turns into a progress line while a scan runs; a second scan cannot be started until the first ends.
8	Page title	Heading	The name of the page on the right.	–	–	–

Finding your way

1. Pick a page in the sidebar.
2. Read the tiles at the top of the page for the summary, then the table or cards below for detail.
3. Click a row to open the title or file it describes.
4. Use the browser Back button, or the back link on a title page, to return.

- The sidebar is grouped: Library (what you have), Review (what needs attention), Maintenance (tools that change things), App (the application itself).
- Coloured pills beside a sidebar entry count what is waiting there.
- On a phone the sidebar is hidden behind the menu button at the top left.
- Pages that a guest or a standard user may not open are not listed in their sidebar at all.
- The Adult entry only appears when adult content is switched on for the session.

2.1 The sidebar in full

The sidebar is the application's only menu. It is present on every page.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Menu button	Button	Shows and hides the sidebar on a narrow screen.	–	–	Phones and narrow windows only.
–	Dashboard	Navigation link	Opens the Dashboard page.	–	–	–
–	TV Shows	Navigation link	Opens the TV Shows page.	–	–	–
–	Anime	Navigation link	Opens the Anime page.	–	–	–
–	Movies	Navigation link	Opens the Movies page.	–	–	–
–	Web videos	Navigation link	Opens the Web videos page.	–	–	–
–	Adult	Navigation link	Opens the Adult page.	–	–	Hidden until adult content is switched on.
–	Missing	Navigation link	Opens the Missing page.	–	–	–
–	Issues	Navigation link	Opens the Issues page.	–	–	–
–	Quality	Navigation link	Opens the Quality page.	–	–	–

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Upgrades	Navigation link	Opens the Upgrades page.	–	–	–
–	Reclaim space	Navigation link	Opens the Reclaim space page.	–	–	–
–	Ratings	Navigation link	Opens the Ratings page.	–	–	–
–	Watch tonight	Navigation link	Opens the Watch tonight page.	–	–	–
–	Watched	Navigation link	Opens the Watched page.	–	–	–
–	Requests	Navigation link	Opens the Requests page.	–	–	–
–	Change log	Navigation link	Opens the Change log page.	–	–	–
–	Movie names	Navigation link	Opens the Movie names page.	–	–	–
–	Rename TV/anime	Navigation link	Opens the Rename TV/anime page.	–	–	–
–	CSV export	Navigation link	Opens the CSV export page.	–	–	–
–	System	Navigation link	Opens the System page.	–	–	–
–	Family portal	Navigation link	Opens the Family portal page.	–	–	–
–	Log	Navigation link	Opens the Log page.	–	–	–
–	Security	Navigation link	Opens the Security page.	–	–	–
–	Settings	Navigation link	Opens the Settings page.	–	–	–
–	About	Navigation link	Opens the About page.	–	–	–
–	Account line	Label with link	Who is signed in, with a link to sign out; for a guest, a link to sign in.	–	–	Web server only.
–	Show adult content	Check box	Shows adult titles for this session.	–	off	Not offered to guests.
–	Scan now	Button	Starts a scan of every enabled root.	–	–	Administrators only on the web server.
–	Cancel scan	Button	Stops the running scan.	–	–	Shown only while a scan runs.
–	Scan progress	Progress bar	How far the scan is, and the file being read.	–	–	–
–	Lookup progress	Progress bar	How far the episode lookups are.	–	–	–
–	Folder watch line	Label	Says that folders are being watched and when a change was last seen.	–	–	Shown when folder watch is on.
–	Update pill	Indicator	Appears on About when a newer version is available or downloaded.	–	–	–
–	Version	Label	The version that is running.	–	–	"(dev)" when run from source.
–	Message	Notice	Short confirmations and errors appear at the bottom of the window and fade.	–	–	Red for an error.

2.2 The three ways MediaLedger runs

	What it is	Who uses it
Desktop application	A window on your Windows computer. Reads and writes your own data folder.	You, at your desk.
Web server	The same pages in a browser, served from a Raspberry Pi. Accounts, roles and a security log.	You and the people you give an account, on your network.

	What it is	Who uses it
Family portal	A separate, small, read-only site with its own address.	People you invite, anywhere.

2.3 Colour themes

The application has eight colour themes, all of them dark. This is Gunmetal on the Movies poster wall. There is no light theme.

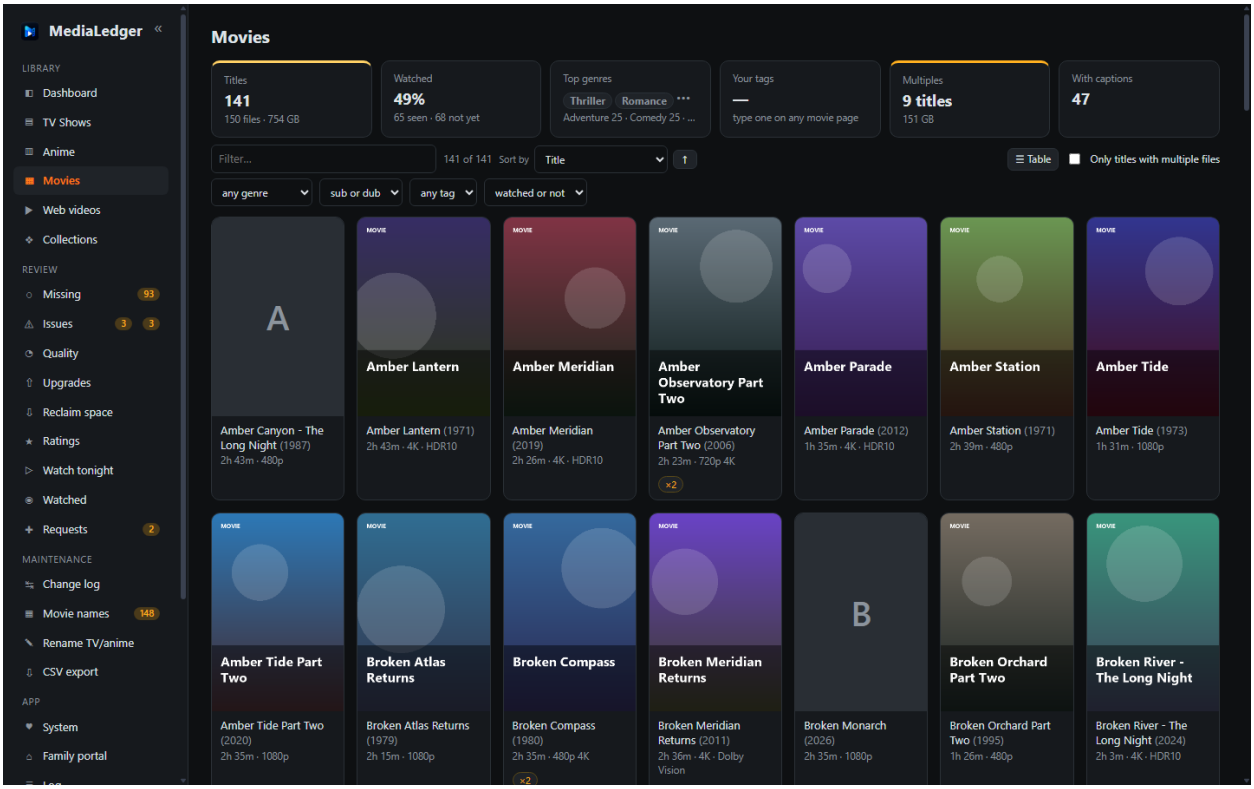


Figure 4. The Gunmetal theme.

- Graphite (the default), Midnight blue, Obsidian, Forest, Rose, Lavender, Gunmetal and Crimson.
- The choice is stored in the browser, so every device and person can have their own.

3. Library

What you have. The Dashboard summarises it; the list pages show it title by title.

3.1 Dashboard

The Dashboard answers "how is the library doing" in one look. Every element is a card; you choose which cards are shown, in what order and how wide (see Dashboard, edit mode).



Figure 5. Dashboard. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Trend period	Drop-down list	Sets the period of every trend card that does not have its own.	last 30 days, last 90 days, last year, all time	last 90 days	Remembered in this browser.
2	Edit dashboard	Button	Turns on edit mode.	–	–	Not shown to guests.
3	Library tile	Tile	Files, total size and hours of video across every library.	–	–	–
4	Linked tile	Tile (link)	A tile that opens the page behind its number: TV Shows, Anime, Movies, Missing, Requests and others.	–	–	The pointer changes to a hand over linked tiles.
5	Coloured tile	Tile with a colour rule	The top edge is green, amber or red according to the thresholds of that card.	Thresholds per card, in the card options.	Shipped defaults, for example library health amber at 97 % and red at 90 %.	–
6	Bar chart card	Chart	One bar per value, split by library. Count and share are printed beside each bar.	–	Ten bars	Square-root scale. Hover for details, click a segment to open the filtered list.
7	Donut card	Chart	Shares of a whole: anime by sub or dub, watched against not yet.	–	–	Click a legend row to open the matching list where one exists.
8	Trend card	Chart	A value over time from the daily snapshots, with the change since the start of the period.	Follows the trend period unless the card has its own.	–	Green or red says whether the change is good for that value.

Typical workflow

1. Read the notices at the top, if any: an overdue job, an unreachable family portal address, or a newer version.
2. Read the number tiles: green is fine, amber wants attention, red wants it now.
3. Click a tile to open the page behind the number.
4. Hover a bar in a chart for the exact count and the split by library; click a bar to open that list already filtered.
5. Change the trend period at the top to see a month, a quarter, a year or everything.

Features

- Number tiles with colour rules; the thresholds are yours to change per card.
- Bar charts on a square-root scale, so a small value is still visible next to a large one; the numbers beside each bar are exact.
- Donut charts for shares, trend lines from the daily snapshots.
- Tables: recently added, largest series, largest movie files, most missing episodes, scan history, next up.

Edge cases

- A trend card needs two daily snapshots before it can draw a line; until then it says so.
- Cards about who watched what are left out for guests, and the overdue-jobs card is shown to administrators only.
- The numbers are held in memory for up to a minute while nothing in the library changes; any change refreshes them at once.

Messages and what they mean

Message	Meaning and what to do
`<job> is overdue: last ran N h ago, expected within N h`	A scheduled job has not run for twice its interval. Open Settings, Schedules.
`Family portal: <address> is not reachable`	The server could not open its own portal address twice in a row. Open Family portal.
`MediaLedger <version> is available`	Web server only. Run the update command on the Raspberry Pi.

3.2 Dashboard, edit mode

Edit mode is where you arrange the Dashboard. Each account keeps its own arrangement on the web server; guests see the administrator's; the desktop application keeps one.

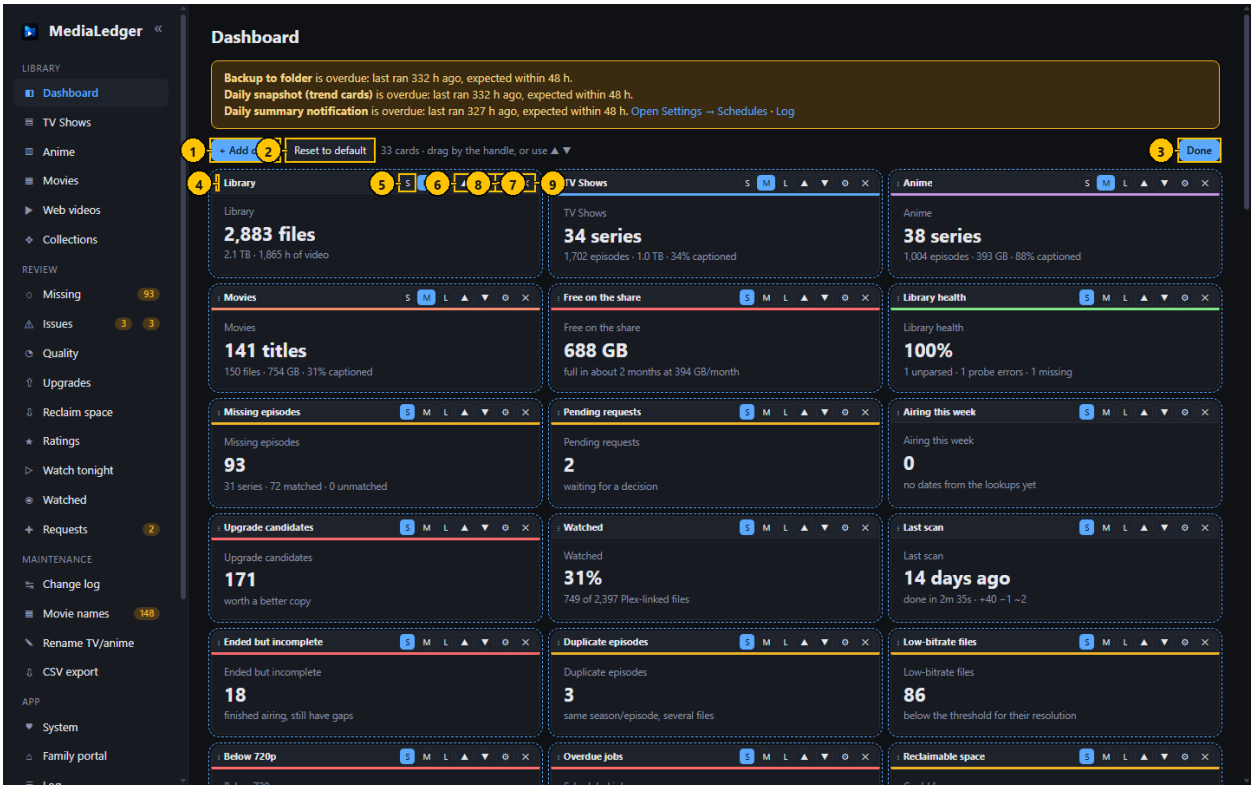


Figure 6. Dashboard, edit mode. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Add card	Button	Opens the catalog of cards.	–	–	–
2	Reset to default	Button	Replaces your arrangement with the original one.	–	–	Asks first. Cannot be undone.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
3	Done	Button	Leaves edit mode and saves.	–	–	–
4	Drag handle	Handle	Drag to move the card. A blue edge on another card shows where it will land.	–	–	Mouse only; use the arrows on a touch screen.
5	Size buttons	Button group	Set the width of the card.	S, M, L, XL; a card offers only the sizes that suit it.	Per card	The current size is highlighted.
6	Move up	Button	Moves the card one place earlier.	–	–	–
7	Move down	Button	Moves the card one place later.	–	–	–
8	Card options	Button	Opens the options of this card.	–	–	–
9	Remove	Button	Takes the card off the Dashboard.	–	–	The card stays in the catalog and can be added again.

Typical workflow

1. Press Edit dashboard.
2. Drag a card by its handle to move it, or press the up and down arrows.
3. Press S, M, L or XL on the handle to change the width.
4. Press the gear to change the title, the period, the rows or the colour thresholds of that card.
5. Press the cross to remove a card, and Add card to put one in.
6. Press Done. The arrangement is saved.

Features

- A grid six columns wide: S is one column, M two, L three (half the width), XL all six.
- Cards can be added more than once, for example one trend over a month and the same trend over a year.
- Reset to default puts the original arrangement back.

Edge cases

- While you edit, the cards are drawn from the numbers already on screen, so moving and resizing is immediate; fresh numbers load when you press Done.
- On narrow screens cards widen by themselves; S becomes half the width and everything larger takes the full width.
- Links inside cards are switched off in edit mode so a click never navigates away by accident.

Messages and what they mean

Message	Meaning and what to do
`Layout not saved: <reason>`	The arrangement could not be stored on the server. It is kept in this browser and saved on the next change.

3.3 Add a card dialog

The catalog lists every card the Dashboard can show, in eight groups: Library, Health, Quality, Activity, Storage, Watching, Charts and Trends.

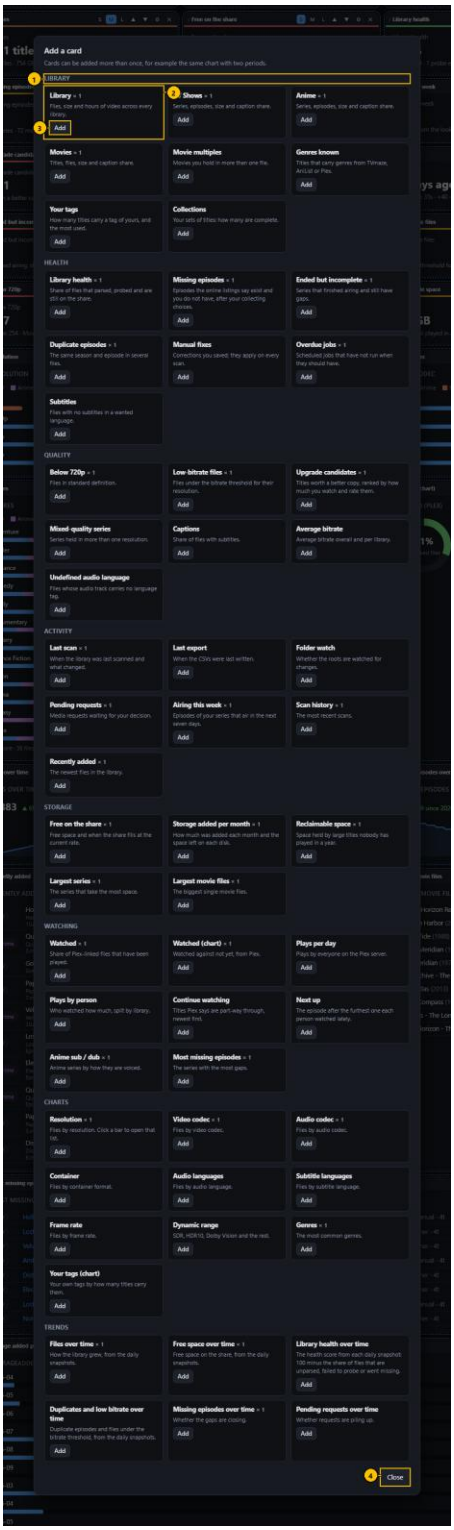


Figure 7. Add a card dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Group heading	Heading	Names the group of cards below it.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	Catalog card	Entry	One card: its name and what it shows.	–	–	–
3	Add	Button	Puts that card on the Dashboard at its usual size.	–	–	–
4	Close	Button	Closes the catalog without adding anything.	–	–	The Escape key does the same.

Typical workflow

1. In edit mode press Add card.
2. Find the card; each has one line saying what it shows.
3. Press Add. The card is placed last and the page scrolls to it.
4. Move and size it as you like.

Features

- A small count beside a name shows how many times that card is already on the Dashboard.

Edge cases

- Guests are offered only the cards they are allowed to see.

3.4 Card options dialog

Each card has a few options. How many are shown depends on the "Options shown" level, which is remembered for your account, so a simple need stays simple.

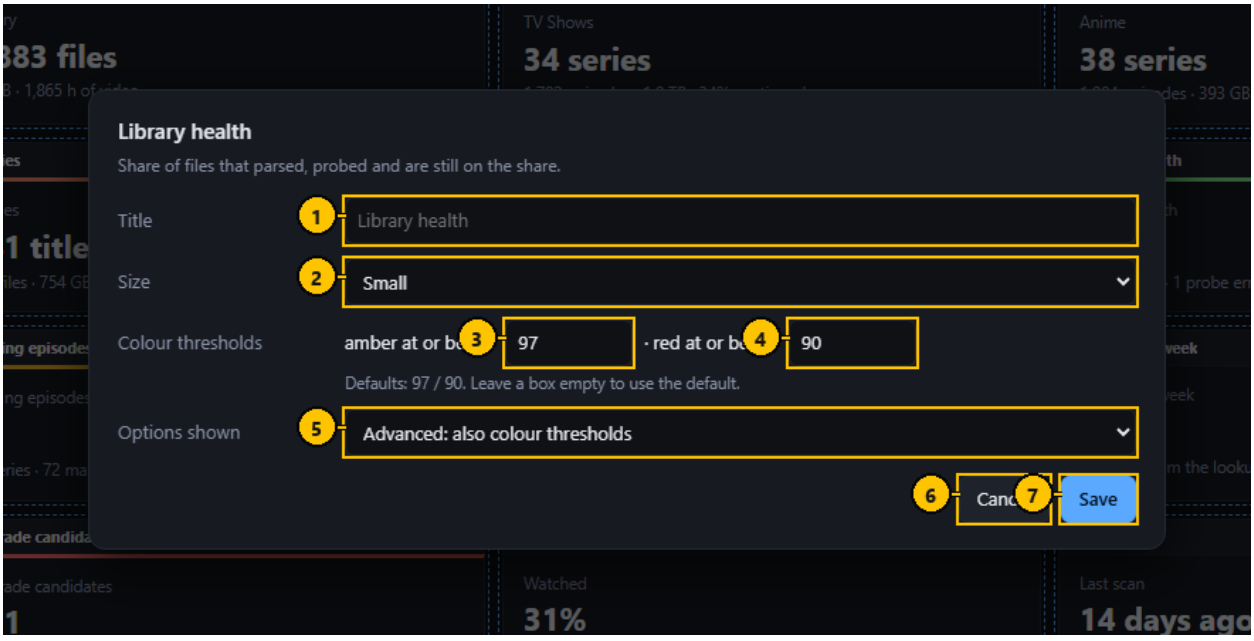


Figure 8. Card options dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Title	Text field	Replaces the name printed on the card.	Free text	The name from the catalog	Leave empty to use the usual name.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	Size	Drop-down list	The width of the card.	Small, Medium, Half width, Full width; only the sizes that suit the card.	Per card	The same as the size buttons on the handle.
3	Amber threshold	Number field	The value at which the tile turns amber.	Any number	Per card	Advanced level only. Whether amber means "at or above" or "at or below" is printed beside the field.
4	Red threshold	Number field	The value at which the tile turns red.	Any number	Per card	Advanced level only.
5	Options shown	Drop-down list	How much this dialog offers.	Simple, Standard, Advanced	Standard	Saved for your account at once; the dialog redraws.
6	Cancel	Button	Closes without saving.	–	–	–
7	Save	Button	Saves the options of this card.	–	–	–

Typical workflow

1. In edit mode press the gear on a card.
2. Change what you need.
3. Press Save. The card is redrawn.

Features

- Simple shows the title and the size.
- Standard adds the period for trend cards and the number of rows for lists.
- Advanced adds the colour thresholds for number tiles.

Edge cases

- Thresholds set with the gear on a tile before version 2.0 are carried over.
- Emptying a threshold returns it to the shipped default.

3.5 TV Shows

One row per series. TV Shows and Anime are the same page over two libraries; Anime adds the sub or dub figures.

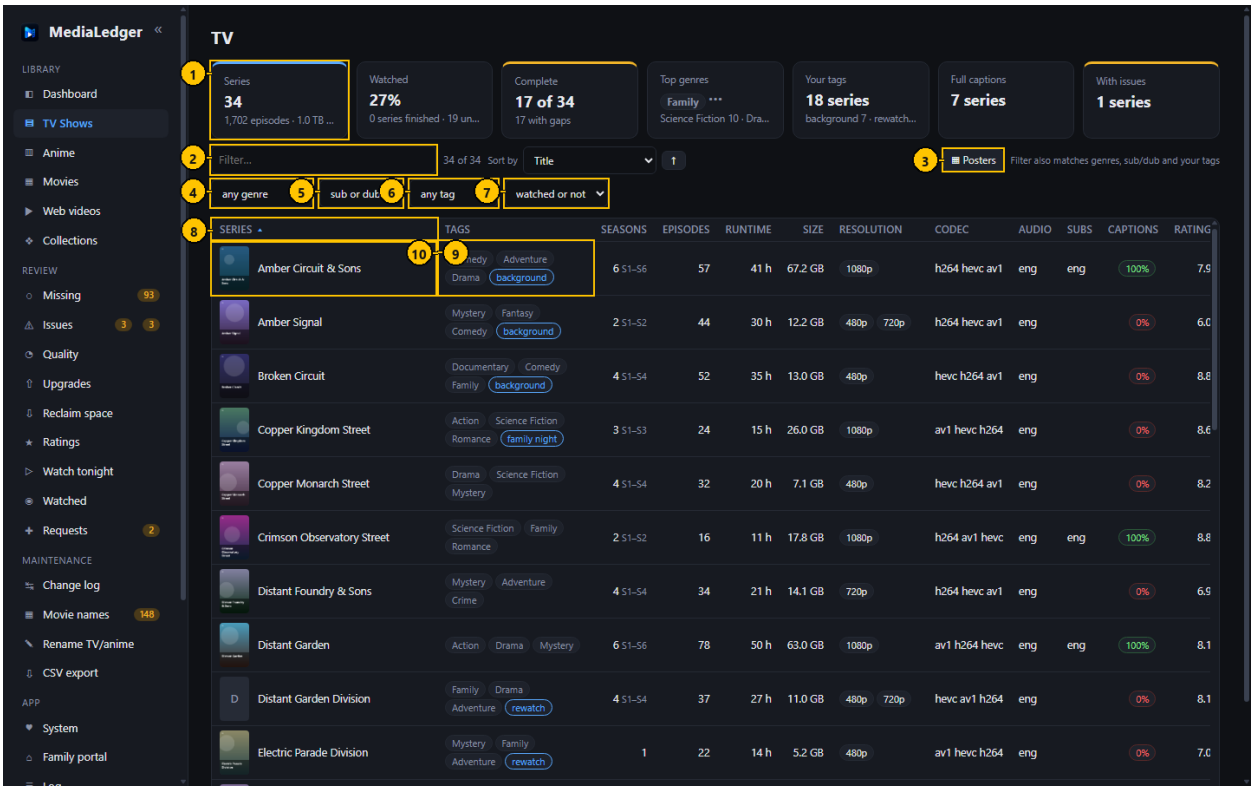


Figure 9. TV Shows. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Series, watched share, complete series, top genres, your tags, captions, series with issues.	–	–	Complete and With issues are links.
2	Filter	Search field	Keeps the rows that contain what you type.	Any text	empty	Matches title, genres, sub or dub, tags, resolution, codec and languages.
3	Posters / Table	Button	Switches between the table and a wall of posters.	–	Table	Remembered in this browser for every list.
4	Genre	Drop-down list	Keeps the series with that genre.	Every genre present in this library	any genre	–
5	Sub or dub	Drop-down list	Keeps the series voiced that way.	Subbed, Dubbed, Dual audio, Mixed	sub or dub	Mostly useful for Anime.
6	Tag	Drop-down list	Keeps the series carrying that tag of yours.	Every tag in use	any tag	–
7	Watched	Drop-down list	Keeps unwatched, partly watched, watched, or series Plex does not have.	–	watched or not	From Plex play counts.
8	Column heading	Sortable heading	Sorts the table by that column.	–	Series, A to Z	A small arrow marks the sorted column.
9	Series	Cell	Poster and name. A series with no poster shows its first letter.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
10	Tags	Cell	Genres in grey, sub or dub in colour, your own tags outlined.	–	–	A "+N" means more than fit.

Typical workflow

1. Read the tiles for the library as a whole.
2. Narrow the list with the filter box and the four drop-down lists.
3. Click a column heading to sort by it; click again to reverse.
4. Click a row to open the series.

Features

- A poster thumbnail beside each title.
- Genres come from the online match or from Plex; sub or dub is worked out from the audio and subtitle languages of the files; your own tags are typed on the series page.
- The Missing column counts episodes that aired and that you do not have, after your collecting choices.

Edge cases

- A series without an online match has no expected count, so Missing is empty rather than zero.
- The filter box also matches genres, sub or dub and tags.
- A link such as #tv?q=4K, which the Dashboard charts produce, opens the list already filtered.

3.6 Poster wall view

The same list as a wall of posters. It is a view of the table, not a separate page, so the filter box, the drop-down lists and the sort order all keep working.

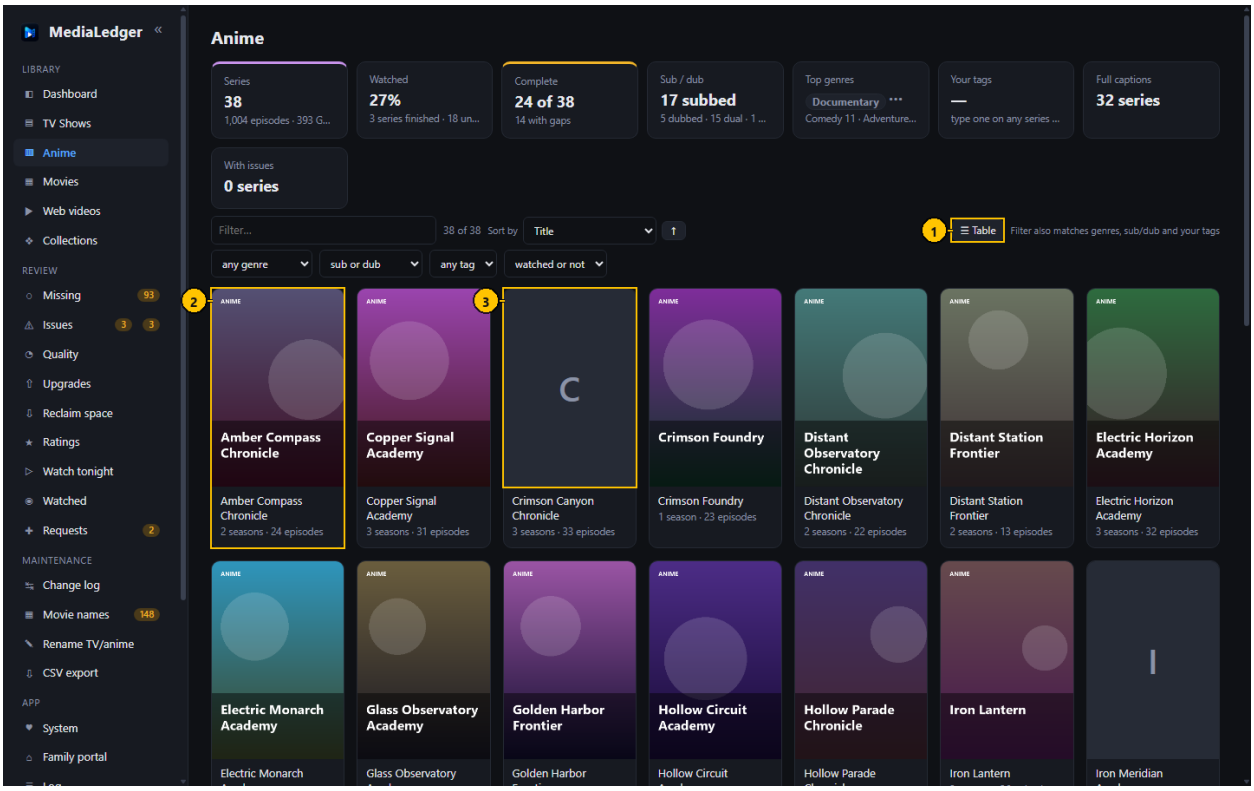


Figure 10. Poster wall view. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Table	Button	Returns to the table.	–	–	–
2	Poster tile	Tile	One title. Click to open it.	–	–	–
3	Title without a poster	Tile	Shown when no source had art for the title.	–	–	It is asked for again after two weeks.

Typical workflow

1. Press Posters in the toolbar of a list.
2. Scroll, filter or search as usual.
3. Click a poster to open the title.
4. Press Table to return.

Features

- Posters load as they scroll into view.
- Titles without art show their first letter on a plain tile.

Edge cases

- The column headings are hidden on the wall; choose the sort order in the table first.

3.7 Poster wall: details card

On the poster wall, resting the pointer on a tile opens a card with the rest of what the table would show for that title, so the wall can be browsed without switching back.

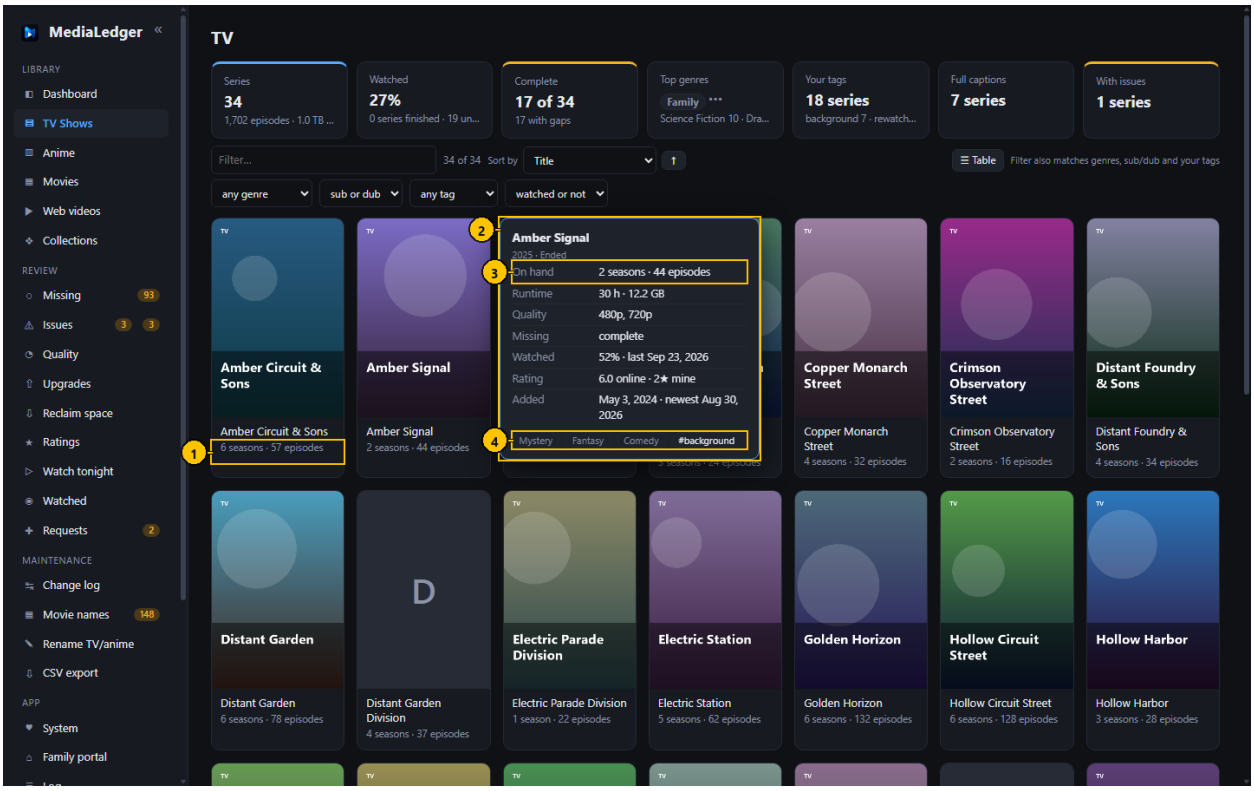


Figure 11. Poster wall: details card. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Facts line	Label	Seasons and episodes on hand under the title; for a movie, length and quality.	–	–	Shown on the wall only.
2	Details card	Card	Opens after the pointer rests on a tile for about a third of a second.	–	closed	Cannot be clicked; it is information only.
3	Fact rows	Label	One row per fact: On hand, Runtime, Quality, Missing, Watched, Rating, Next episode, Added.	–	–	Empty facts are left out.
4	Genres and tags	Label	Up to five genres, then your own tags with a # in front.	–	–	–

Typical workflow

1. Switch a list to the poster wall with Posters in the toolbar.
2. Rest the pointer on a tile for a moment. The card opens beside it.
3. Move away, scroll or click and the card closes. Clicking the tile opens the title as usual.

Features

- Series: seasons and episodes on hand, runtime and size, quality, missing episodes, watched share and last viewed, ratings, next episode, dates added, genres and tags.
- Movies: versions and size, quality with bitrate, editions, plays, ratings, audio and subtitle languages, date added.
- The card stays inside the window: it opens to the left of a tile near the right edge.

Edge cases

- A line is left out when there is nothing to say, for example Watched before Plex has been synced.
- Touch screens have no pointer to rest, so the card is not shown there.

3.8 Series page (episodes)

Everything about one series: what you have, what is missing, and the details of every file.

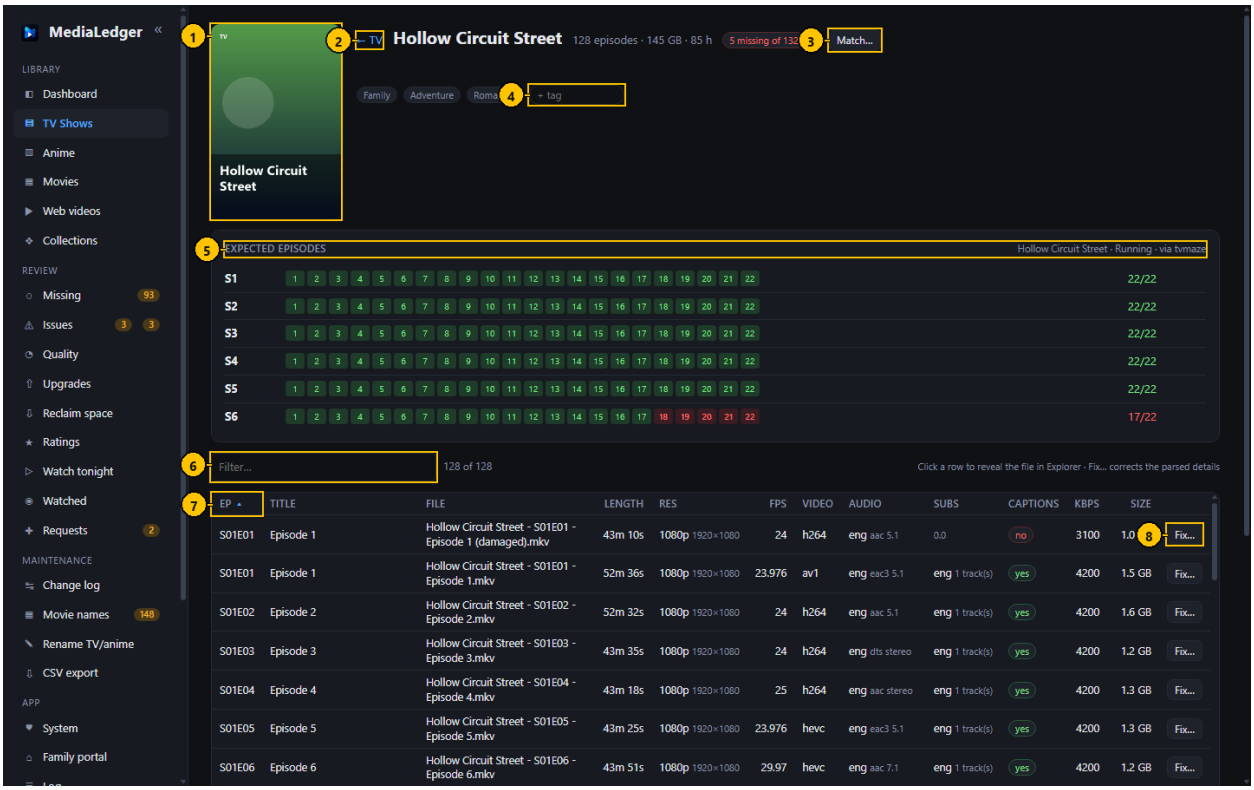


Figure 12. Series page (episodes). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Poster	Image	The poster of the series.	–	–	From Plex, AniList or TVmaze.
2	Back link	Link	Returns to the list.	–	–	–
3	Match	Button	Opens the Match dialog for this series.	–	–	–
4	Add a tag	Text field	Adds a tag of your own to the series.	Up to 40 characters	empty	Press Enter to add.
5	Expected episodes	Card	One row per season with a box per episode.	–	–	The count on the right is episodes on hand out of episodes expected.
6	Filter	Search field	Keeps the files that contain what you type.	–	empty	–
7	Column heading	Sortable heading	Sorts the files.	–	Episode order	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
8	Fix	Button	Opens the Fix dialog for that file.	–	–	Administrators only on the web server.

Typical workflow

1. Read the Expected episodes card: a green number is an episode you have, a red one is missing.
2. Type a tag and press Enter to add it; click a tag of yours to remove it.
3. Click a row to show the file in its folder (desktop), or press Fix to correct how the file was read.
4. Press Match if the online listing is the wrong series.

Features

- A large poster beside the title.
- The expected episodes come from TVmaze or AniList; episodes that have not aired yet are not counted.

Edge cases

- "absolute numbering" appears when the files are numbered straight through while the listing is split into seasons; that season is skipped rather than reported as hundreds of gaps.
- A file that was present and has vanished from the share is listed last and marked missing.

3.9 Movies

One row per movie. A movie held in several files, for example two editions or two qualities, is one row with a count.

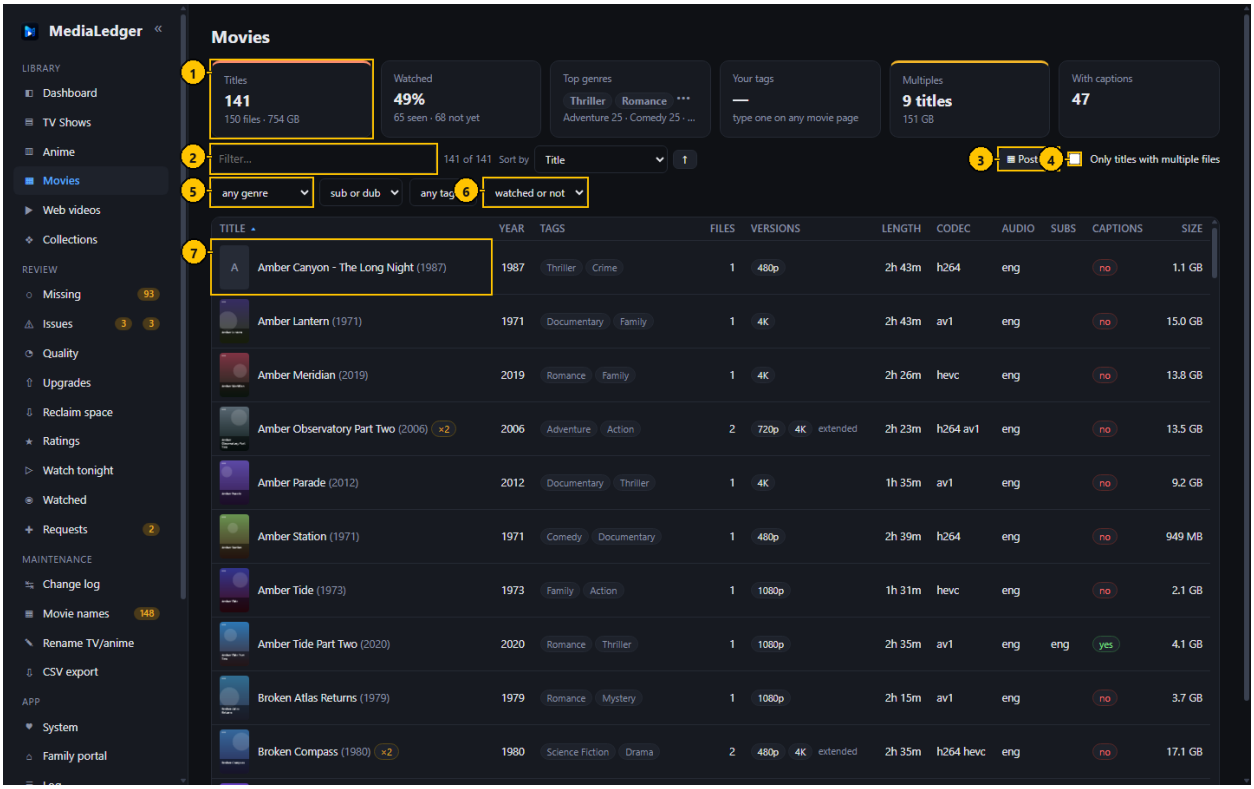


Figure 13. Movies. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Titles, watched share, top genres, your tags, multiples, captions.	–	–	Multiples is a link to the Duplicates tab.
2	Filter	Search field	Keeps the rows that contain what you type.	–	empty	Matches title, year, genres, tags, resolution, codec and dynamic range.
3	Posters / Table	Button	Switches between the table and the poster wall.	–	Table	–
4	Only titles with multiple files	Check box	Keeps the movies that have more than one file.	–	off	–
5	Genre	Drop-down list	Keeps the movies with that genre.	–	any genre	–
6	Watched	Drop-down list	Keeps unwatched or watched movies, or the ones Plex does not have.	–	watched or not	–
7	Title	Cell	Poster, name and year; an amber "×2" when there are several files.	–	–	–

Typical workflow

1. Narrow the list with the filter box and the drop-down lists.
2. Tick "Only titles with multiple files" to review duplicates and editions.
3. Click a row to open the movie.

Features

- Versions lists every resolution on hand and the edition names.
- Genres come from Plex.

Edge cases

- A file in a movie folder whose name carries a season and episode marker is reported on the Issues page, not silently shown as a movie.

3.10 Movie page (versions)

The files that make up one movie, side by side, so you can see which copy is the better one.

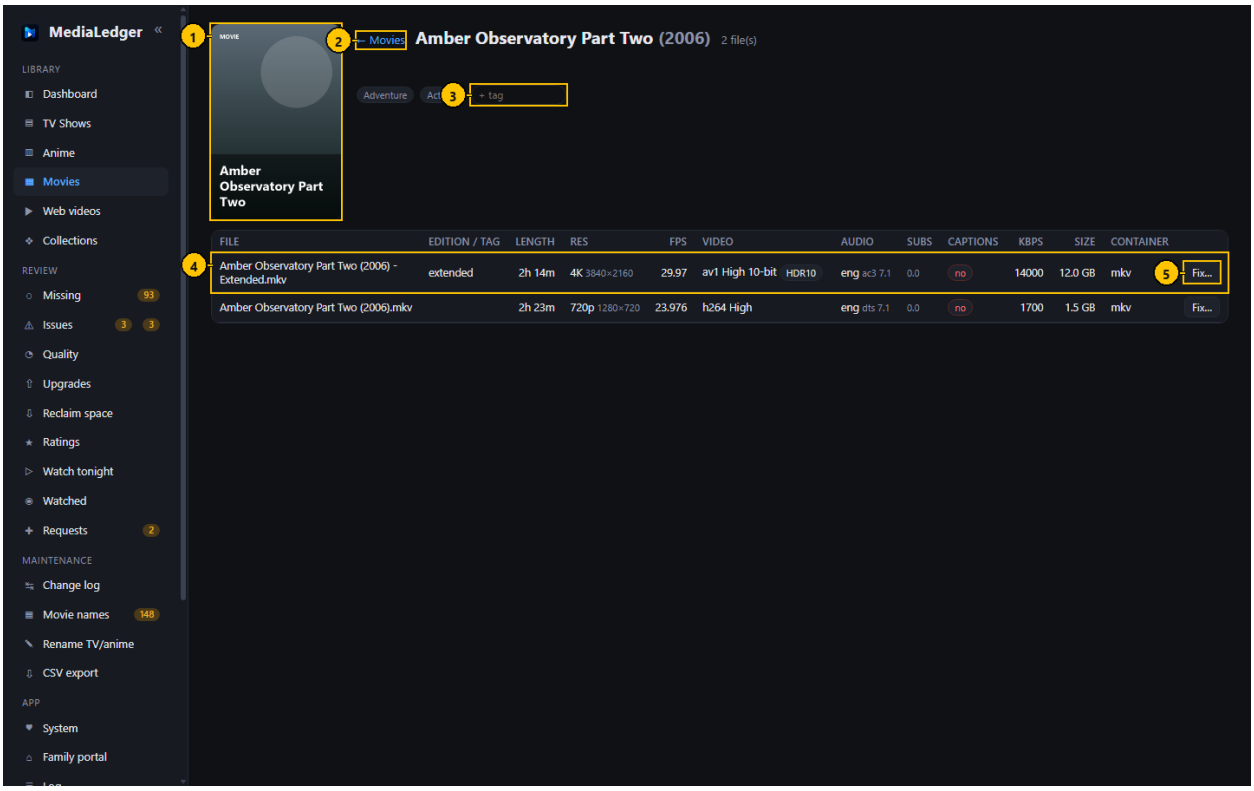


Figure 14. Movie page (versions). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Poster	Image	The poster of the movie.	–	–	–
2	Back link	Link	Returns to Movies.	–	–	–
3	Add a tag	Text field	Adds a tag of your own.	Up to 40 characters	empty	Press Enter to add.
4	File row	Row	One file of this movie with its measured details.	–	–	Click to show the file in its folder (desktop).
5	Fix	Button	Opens the Fix dialog for that file.	–	–	–

Typical workflow

1. Compare resolution, bitrate, size, audio and subtitles.
2. Press Fix on a file that was read wrongly, for example to give it an edition name.

Features

- Tags work as on a series page.

3.11 Web videos

Downloaded web videos, grouped by channel. The channel is the folder name and the video identifier is read from the square brackets in the file name.

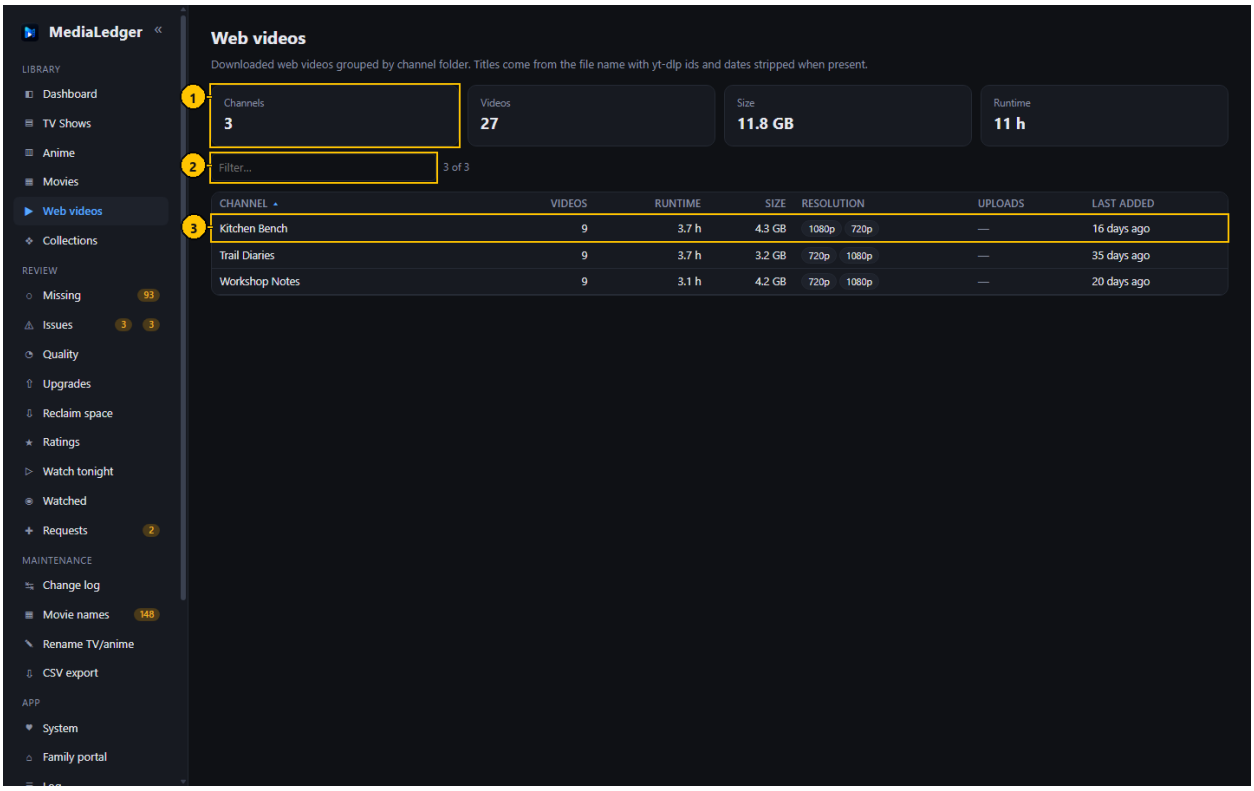


Figure 15. Web videos. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Channels, videos, total size and hours.	–	–	–
2	Filter	Search field	Keeps the channels that contain what you type.	–	empty	–
3	Channel row	Row	One channel with its count, size and the resolutions present.	–	–	Click to open the channel.

Typical workflow

1. Click a channel to list its videos.
2. Use the filter box to find a channel.

Features

- Videos are kept out of the missing-episode and movie logic; they are listed and measured, nothing more.

3.12 Adult library

Roots of the type Adult are scanned like any other but kept apart: hidden by default, out of the CSV files unless you allow it, never given a poster, and never shown on the family portal.

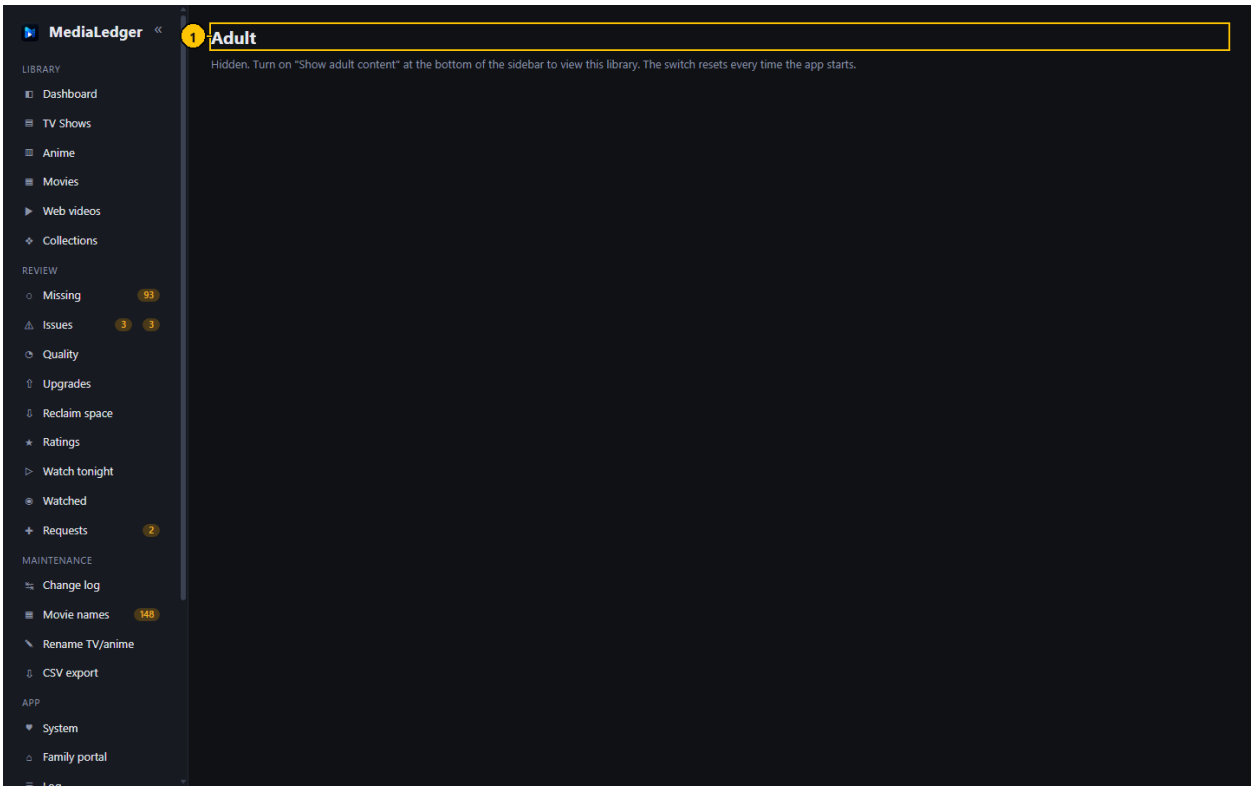


Figure 16. Adult library. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Page title	Heading	Adult. With the switch off the page only explains how to turn it on.	–	–	–

Typical workflow

1. Switch "Show adult content" on at the bottom of the sidebar; on the web server this applies to your session only.
2. The Adult entry appears in the sidebar and adult titles join the other pages.

Edge cases

- Guests cannot switch adult content on.
- With the switch off this page says so and lists nothing.

3.13 Collections

Sets of titles that belong together across TV, anime and movies: a film series, a shared universe, a director's work. Each card shows what is in the library, what is missing, and how much there is to watch. Collections from Plex are read in on each sync and never written back.

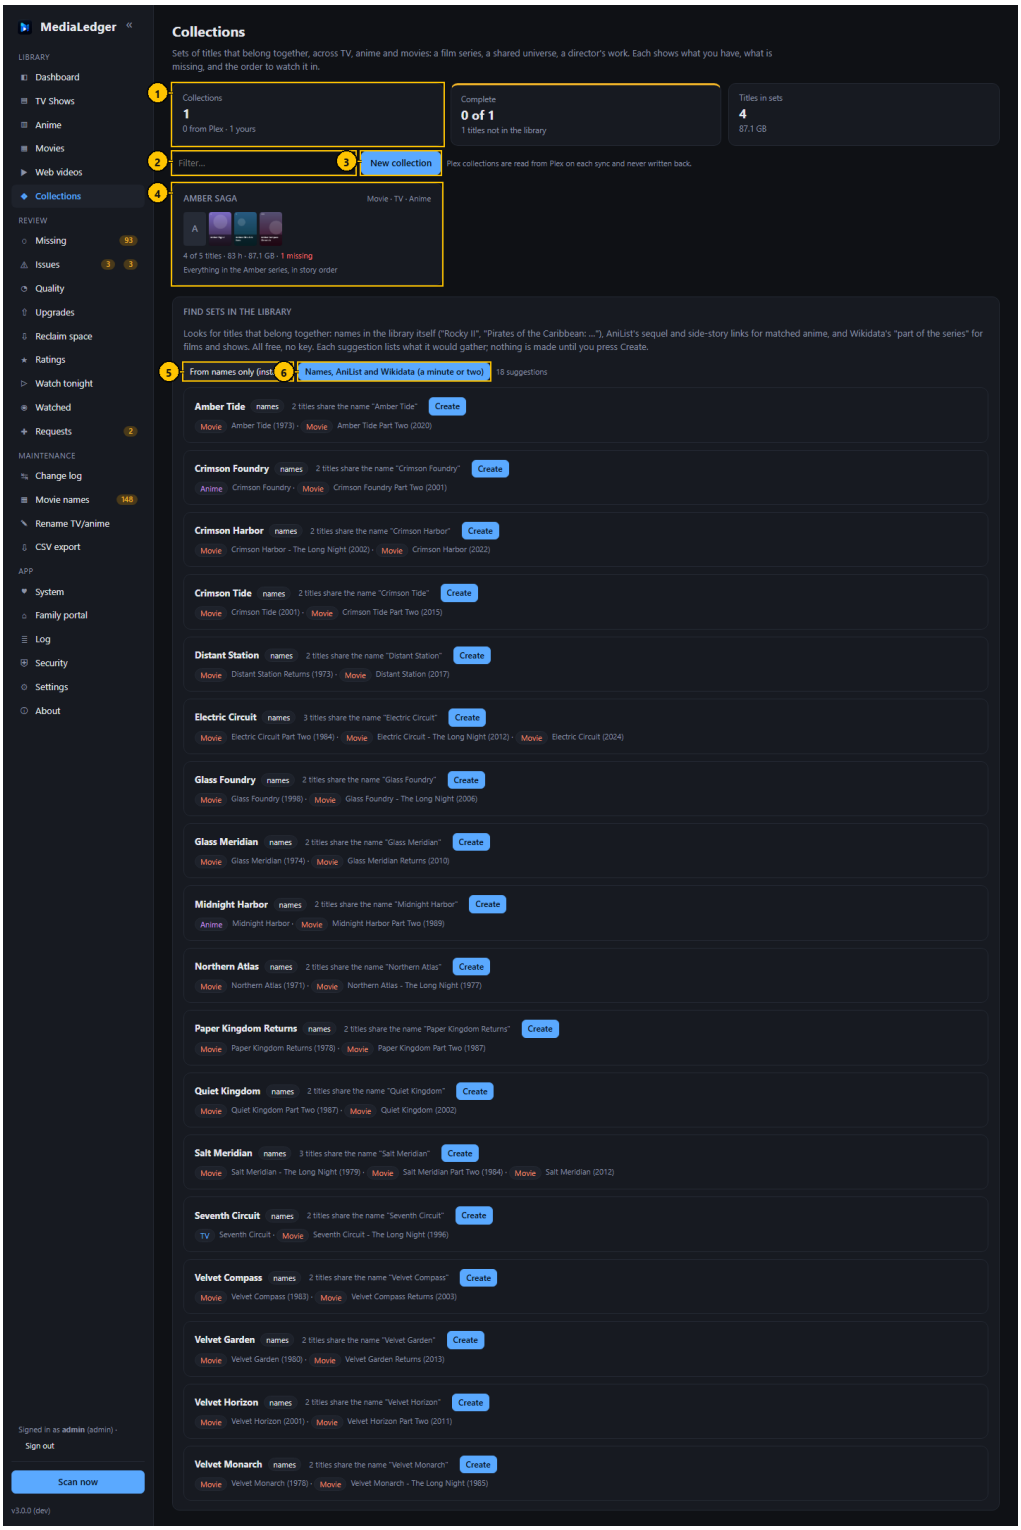


Figure 17. Collections. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tile	How many collections, how many are complete, and how many titles are in sets.	–	–	–
2	Filter	Search field	Narrows the cards by name.	–	empty	–
3	New collection	Button	Opens the dialog for a name and a note.	–	–	Administrators only on the web server.
4	Collection card	Card	Opens the collection.	–	–	Shows a poster strip and the counts.
5	From names only	Button	Suggests sets from the titles in the library, at once.	–	–	–
6	Names, AniList and Wikidata	Button	Also asks AniList and Wikidata. Progress is shown beside the buttons.	–	–	Free sources, no key.

Typical workflow

1. Press New collection, give it a name, and add titles on its page.
2. Or press one of the Find sets buttons and create the sets it suggests.
3. Open a card to see the titles in order.

Features

- A collection marked Plex follows Plex's list; titles you add to it yourself survive the next sync.
- The strip of posters shows the first titles in the library; the line beneath counts titles, runtime, size, gaps and what is watched.
- Find sets looks in the library's own names, AniList's links between anime, and Wikidata's film and show series. Nothing is made until Create is pressed.

Edge cases

- A Plex collection with the same name as one of yours is called "Name (Plex)".
- A standard user sees the collections and cannot change them.
- The web lookups take a minute or two on a large library and are capped at 40 titles each per run.

Messages and what they mean

Message	Meaning and what to do
`There is already a collection called …`	Names are unique, regardless of case.
`Give the collection a name`	The name field is empty.
`Nothing found that is not already in a collection.`	Every set the finder can see is made already.

3.14 A collection

One collection: its titles in order, what is on hand and what is not, and the tools to change it.

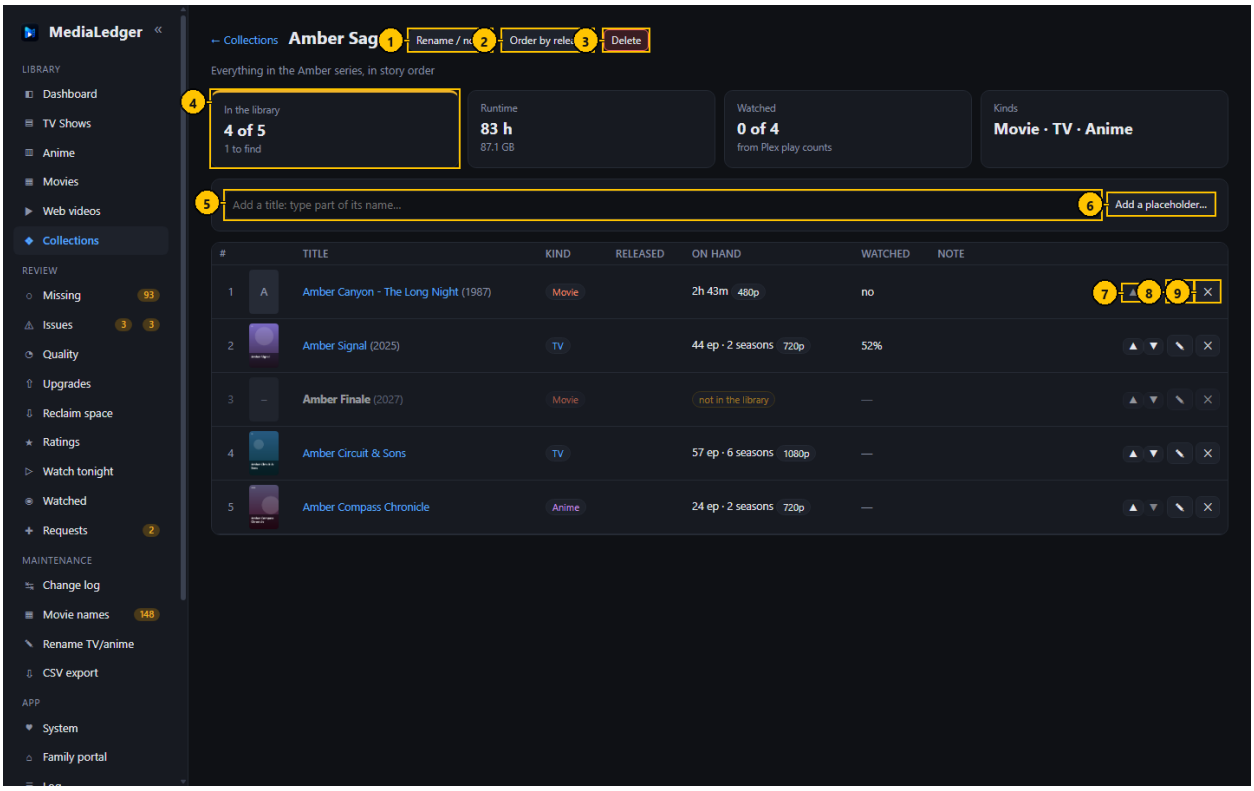


Figure 18. A collection. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Rename / note	Button	Changes the name and the note.	–	–	–
2	Order by release	Button	Orders the titles by release date, then year, then name.	–	–	Placeholders with a year only come after dated titles of that year.
3	Delete	Button	Deletes the collection. The titles stay in the library.	–	–	Asks first.
4	Tiles	Tile	In the library, runtime, watched, kinds.	–	–	–
5	Add a title	Search field	Searches the whole library as you type; a click adds the title.	Two letters or more.	empty	Titles already in the set are greyed.
6	Add a placeholder	Button	Adds a title you do not own yet, by name, year and kind.	–	–	–
7	Move up	Button	Moves the title one place up.	–	–	–
8	Note	Button	Sets or clears the note on that title.	Up to 300 characters.	–	–
9	Remove	Button	Takes the title out of the collection.	–	–	Asks first.

Typical workflow

1. Type part of a title in the add box and click the match to add it.
2. Press Add a placeholder for a title you do not own, so the gap shows.
3. Move titles with the arrows, or press Order by release.

4. Keep a note on a title with the pencil.

Features

- The tiles count what is in the library, the runtime and size on hand, what is watched, and the kinds mixed in.
- A title that is not in the library shows a red "not in the library" badge; a placeholder gets one until a scan finds it.
- Titles from a Plex collection carry a small Plex mark.

Edge cases

- Deleting a Plex collection brings it back on the next sync; delete it in Plex to be rid of it.
- Removing a title from the collection never touches the files.

Messages and what they mean

Message	Meaning and what to do
`Pick a title from the library or type one`	The add box or placeholder dialog was empty.
`No such collection`	It was deleted; the list is reloaded.

4. Review

What needs attention, and what to do next.

4.1 Missing episodes

Compares the episodes you have with the episodes that exist according to TVmaze (TV) and AniList (anime), and lists the gaps.

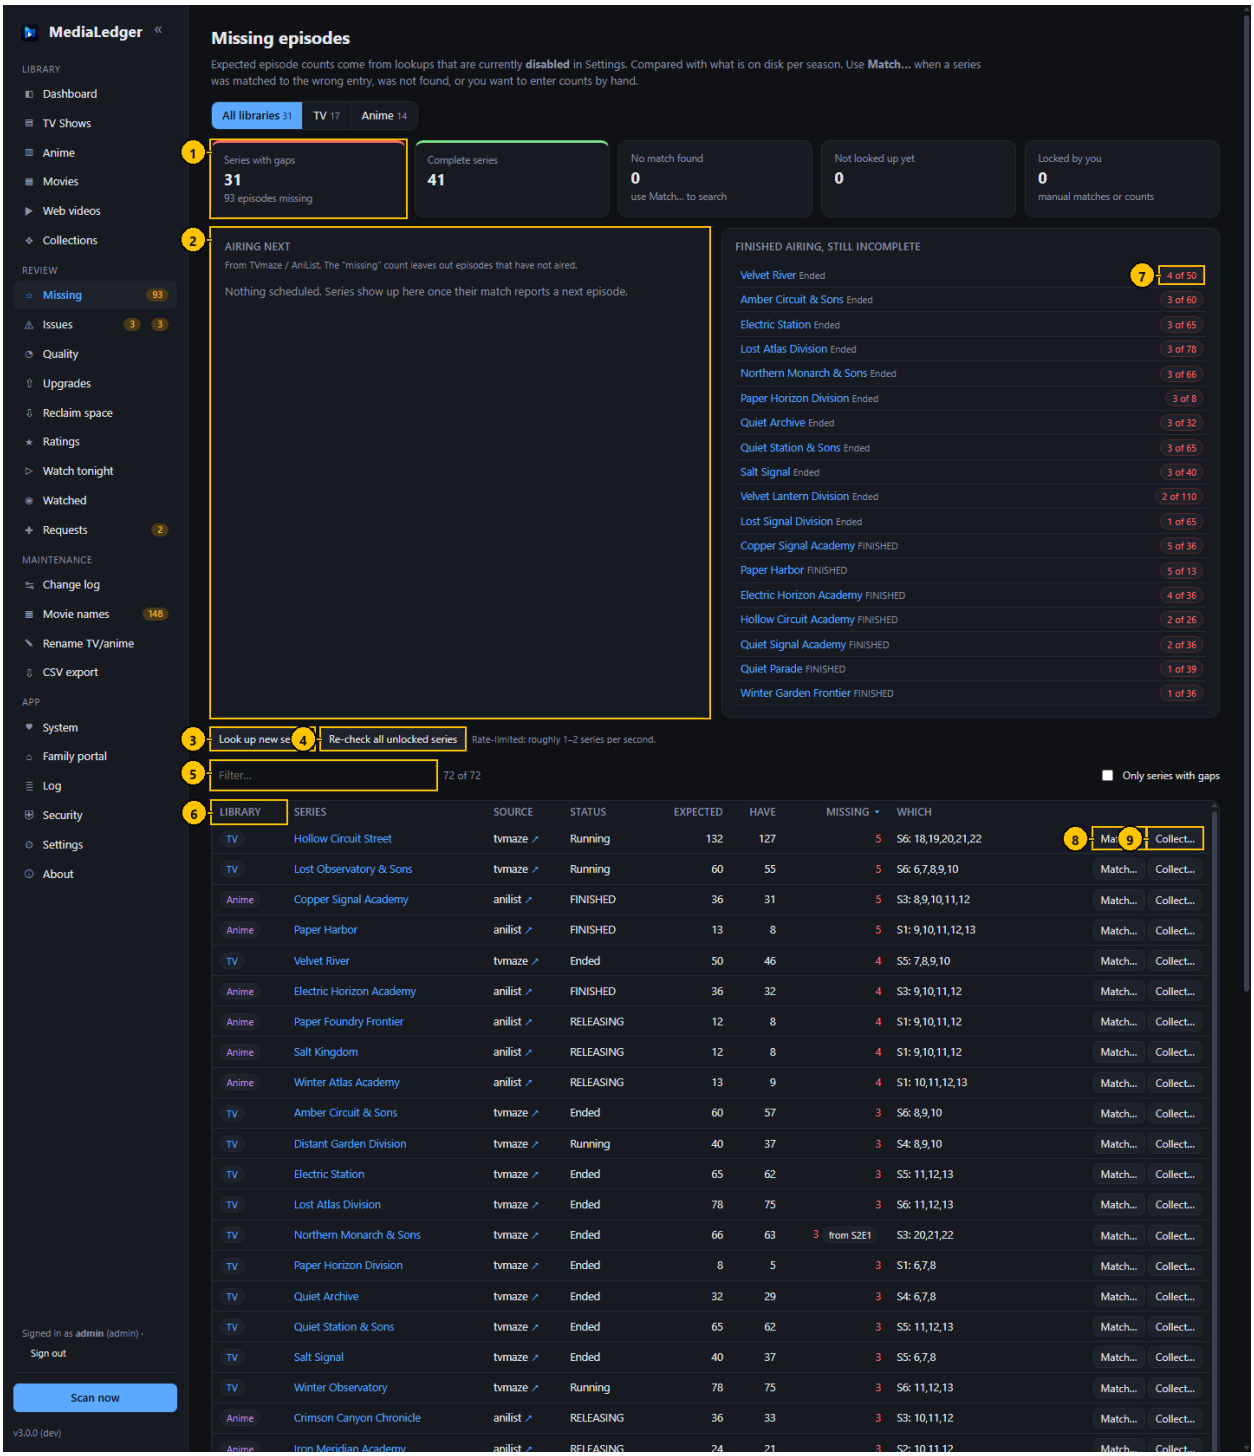


Figure 19. Missing episodes. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Series with gaps, complete series, no match found, lookups pending, locked by you.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	Airing next	Card	The next episode of each running series with its date; this week first.	–	25 rows	Dates come with the episode lookup.
3	Look up new series	Button	Looks up the series that have never been matched.	–	–	Runs in the background.
4	Re-check all unlocked series	Button	Looks every series up again except the locked ones.	–	–	Slow by design: about one series a second.
5	Filter	Search field	Keeps the series that contain what you type.	–	empty	–
6	Column heading	Sortable heading	Sorts the table.	–	Missing, most first	–
7	Policy badge	Badge	"muted" or "from S2E1" when a collecting choice applies; the tooltip gives the full count.	–	–	–
8	Match	Button	Opens the Match dialog.	–	–	–
9	Collect	Button	Opens the Collect dialog.	–	–	–

Typical workflow

1. Read the tiles: series with gaps, complete series, series without a match.
2. Read "Airing next" for what is coming this week.
3. Sort the table by Missing to work from the biggest gap.
4. Press Match when the listing is the wrong series or no listing was found.
5. Press Collect to say what you are collecting of a long-running series.

Features

- Episodes that have not aired yet are never counted as missing.
- A collecting choice (from an episode onward, or muted) changes the count everywhere: Dashboard, sidebar, daily summary and the status address.
- A locked match is never replaced by an automatic lookup.

Edge cases

- The online services allow about one request a second, so "Re-check all" takes a while on a large library.
- "absolute numbering" marks a season that was skipped because the files are numbered straight through.

Messages and what they mean

Message	Meaning and what to do
`HTTP 403 from graphql.anilist.co`	AniList refused the request, usually because too many were sent. It is tried again on the next lookup.
`no match`	Neither service had a series with a close enough name. Use Match.

4.2 Match dialog

Chooses which online listing a series is compared with, or lets you type the episode counts yourself.

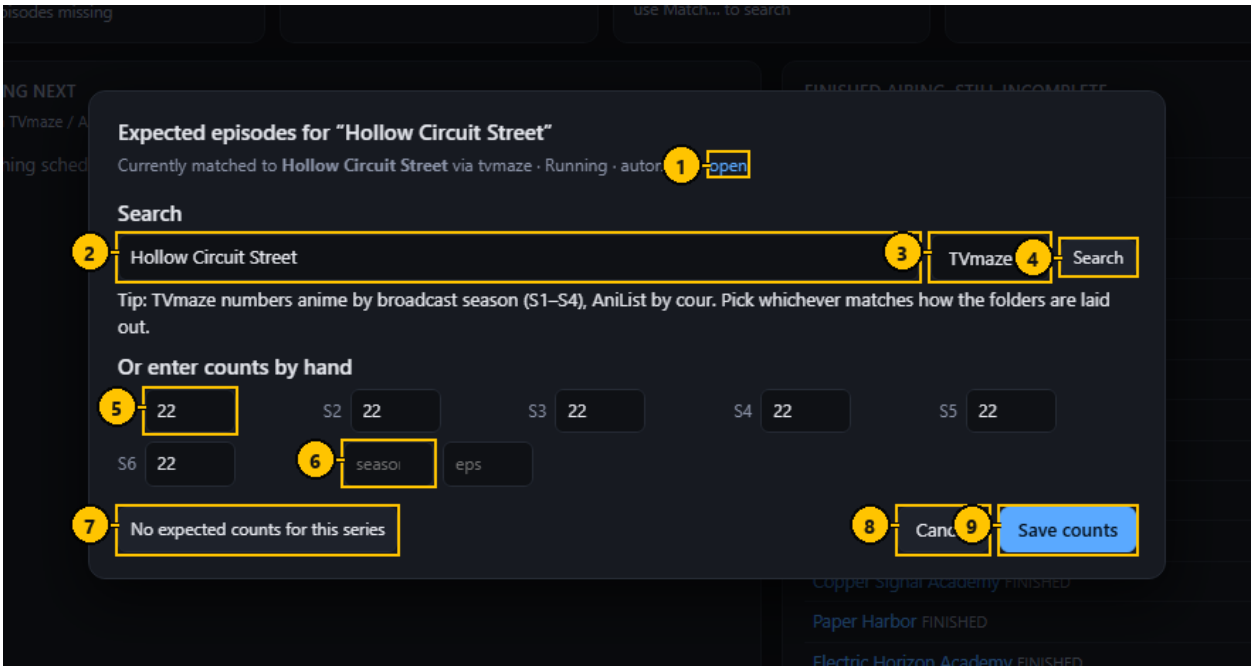


Figure 20. Match dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Open	Link	Opens the current listing on the service's own site.	–	–	Desktop: in your browser.
2	Search words	Text field	What to search the service for.	Any text	The series name	Enter starts the search.
3	Service	Drop-down list	Which service to search.	TVmaze, AniList	TVmaze for TV, AniList for Anime	–
4	Search	Button	Searches and lists the results.	–	–	–
5	Episodes per season	Number fields	The counts to compare against when you enter them by hand.	Whole numbers	The current counts	One field per season.
6	Add a season	Number fields	A season number and its episode count, to add one that is not listed.	–	empty	–
7	No expected counts for this series	Button	Records that the series has no listing, so it is not reported as unmatched.	–	–	–
8	Cancel	Button	Closes without saving.	–	–	–
9	Save counts	Button	Saves the counts you typed and locks them.	–	–	–

Typical workflow

1. Change the search words if the folder name is unusual, pick the service, press Search.
2. Pick the right result from the list. The match is saved and locked.
3. If no listing fits, type the number of episodes per season and press Save counts.
4. Press "No expected counts" for a series that should never be compared.

Features

- A locked match survives every later lookup until you unlock it.

Edge cases

- TVmaze numbers anime by broadcast season while AniList lists each cour separately; pick whichever matches how your folders are laid out.

Messages and what they mean

Message	Meaning and what to do
`Nothing found`	The service had no series for those words. Shorten them or try the other service.

4.3 Collect dialog

Says what you are collecting of one series, so a long runner you joined late does not fill the Missing page with episodes you never meant to keep. No file is touched.

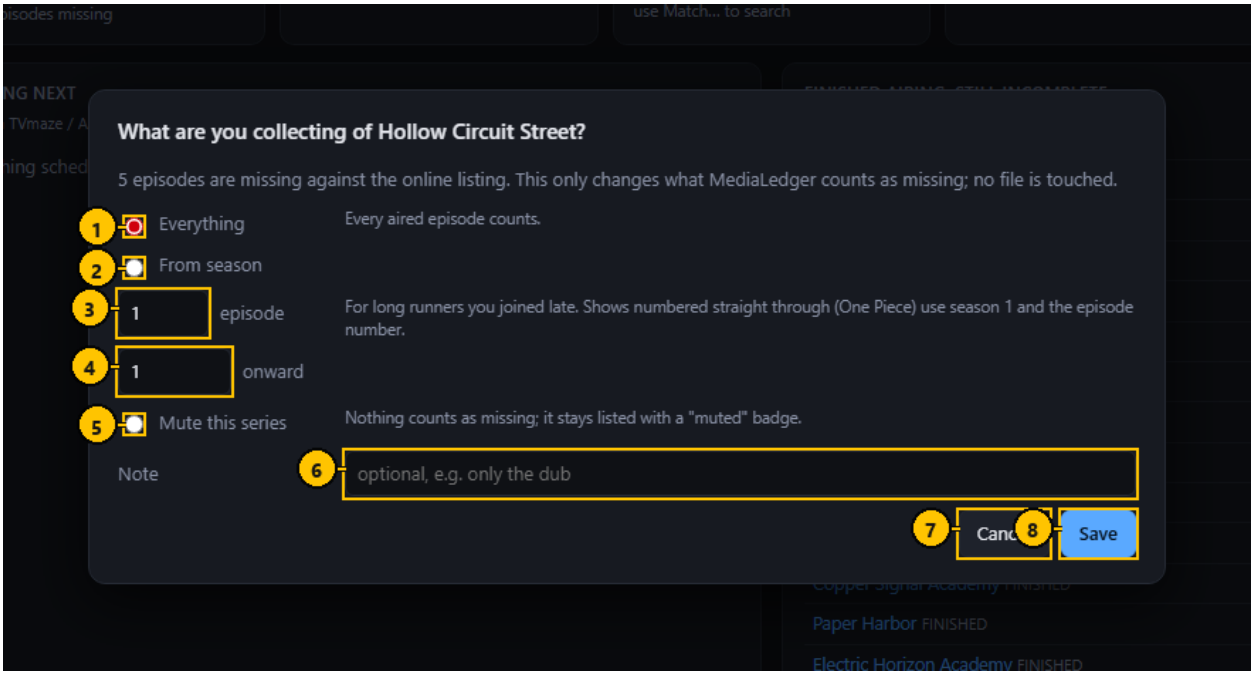


Figure 21. Collect dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Everything	Option	Every aired episode counts.	–	selected	–
2	From a season and episode onward	Option	Earlier seasons, and earlier episodes of that season, are not counted.	–	–	–
3	Season	Number field	The first season you collect.	0 or more	1	–
4	Episode	Number field	The first episode you collect in that season.	1 or more	1	–
5	Mute this series	Option	Nothing counts as missing.	–	–	The series stays listed.
6	Note	Text field	A reminder for yourself.	Up to 200 characters	empty	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
7	Cancel	Button	Closes without saving.	–	–	–
8	Save	Button	Saves the choice.	–	–	–

Typical workflow

1. Choose Everything, From a season and episode onward, or Mute.
2. Optionally type a note to remind yourself why.
3. Press Save.

Features

- The row on the Missing page keeps a badge with the full count in its tooltip.

Edge cases

- For series numbered straight through, use season 1 and the episode number.
- Choosing Everything removes the choice.

4.4 Issues: Problems

Everything the scan could not make sense of, in one place: names it could not read, files ffprobe could not open, files that vanished, episodes filed under Movies, and the fixes you have saved.

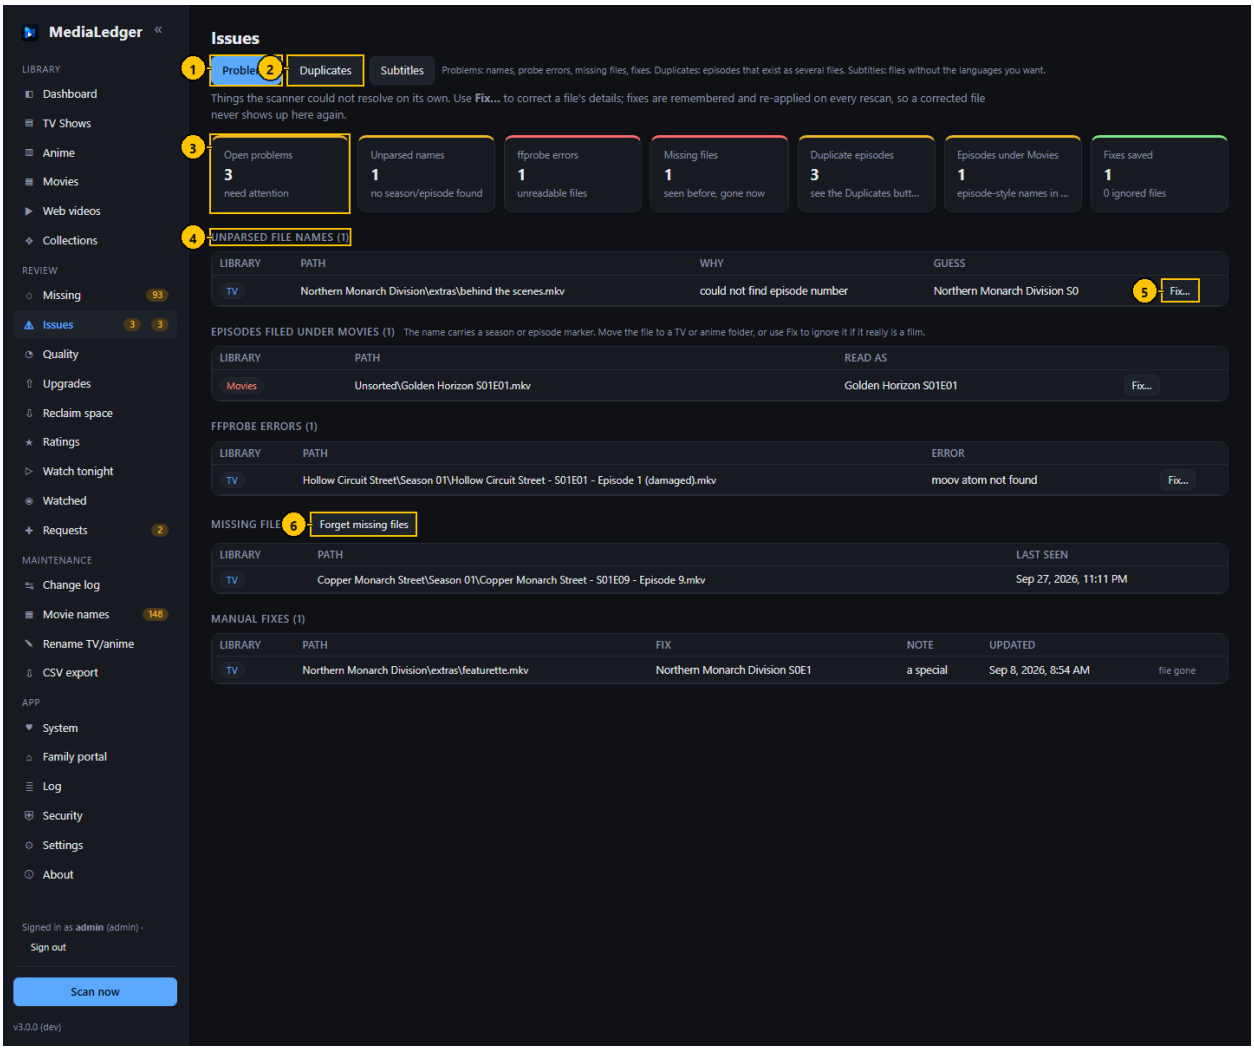


Figure 22. Issues: Problems. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Problems tab	Tab	This page.	–	selected	–
2	Duplicates tab	Tab	Opens the Duplicates tab.	–	–	–
3	Summary tiles	Tiles	Open problems, unparsed names, ffprobe errors, missing files, duplicate episodes, episodes under Movies, fixes saved.	–	–	–
4	Section heading	Heading	Names the kind of problem and counts the rows.	–	–	–
5	Fix	Button	Opens the Fix dialog for that file.	–	–	–
6	Forget missing files	Button	Removes the rows of files that are no longer on the share.	–	–	Only the records are removed; nothing on disk changes.

Typical workflow

1. Start with the tiles to see which kind of problem there is.

2. Press Fix on a row to correct how the file is read, or to ignore it.
3. Move an episode that sits in a movie folder to the right library.
4. Press "Forget missing files" once you are sure the vanished files are gone for good.

Features

- Fixes are stored in the database and applied on every scan, so they survive a rescan and a rename.

Edge cases

- A bare "Episode 1" in a movie name is not flagged, so numbered film series are safe.

Messages and what they mean

Message	Meaning and what to do
`moov atom not found`	ffprobe could not read the file: it is incomplete or damaged.
`no season or episode found in the name`	The name has no recognisable marker. Use Fix.

4.5 Fix dialog

Tells MediaLedger how a file should be read when its name does not say. The fix is a record in the database; the file itself is not changed.

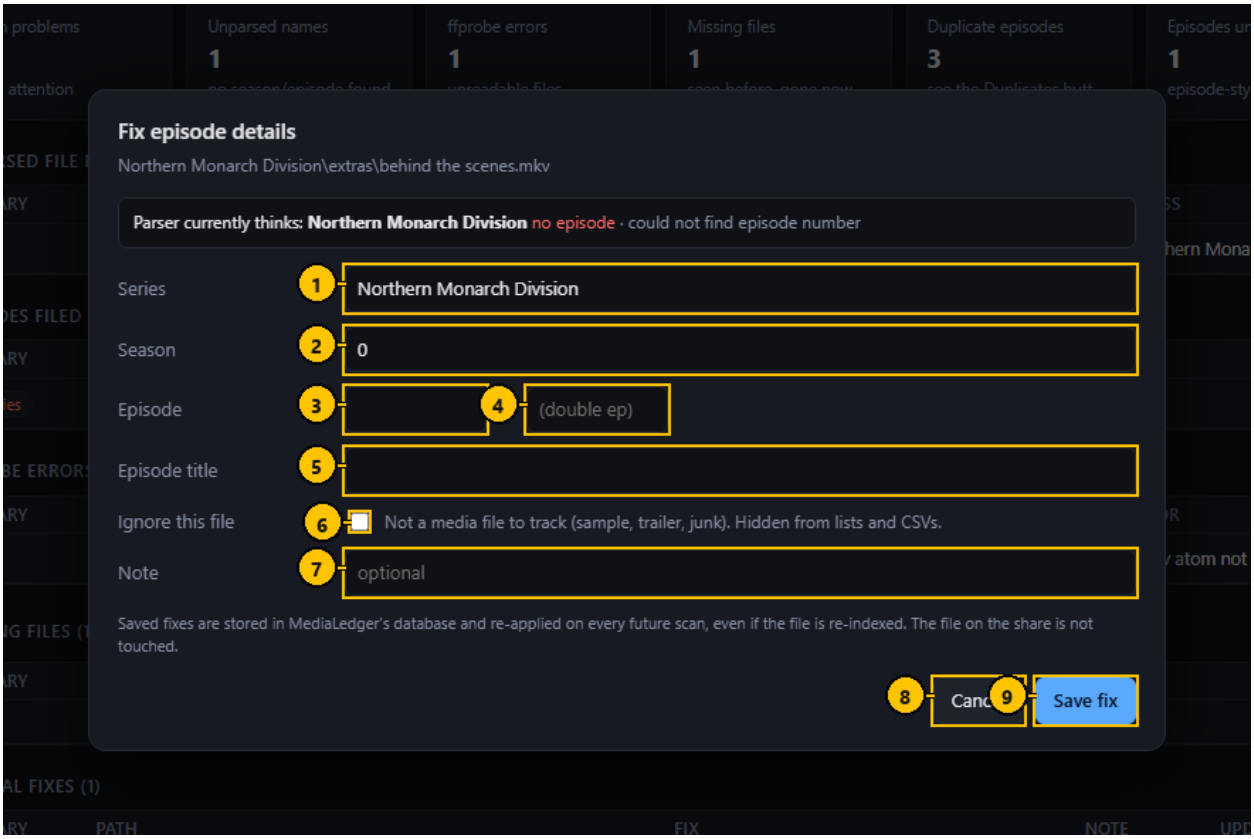


Figure 23. Fix dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Series	Text field	The series the file belongs to.	Text	The current reading	For a movie this field is the title.
2	Season	Number field	The season number.	0 for specials	The current reading	–
3	Episode	Number field	The episode number.	1 or more	The current reading	–
4	Last episode	Number field	For a file that holds two episodes: the number of the second.	–	empty	–
5	Episode title	Text field	The name of the episode.	–	empty	Used by the rename pages.
6	Ignore this file	Check box	Hides the file from every list and count.	–	off	It is listed under Manual fixes.
7	Note	Text field	Why the fix was made.	–	empty	–
8	Cancel	Button	Closes without saving.	–	–	–
9	Save fix	Button	Saves the fix and applies it at once.	–	–	–

Typical workflow

1. Correct the series, season and episode, or the title and year of a movie.
2. Tick "Ignore this file" for a sample, trailer or junk file.
3. Press Save fix. The file is read that way from now on.

Features

- The dialog shows what the parser currently thinks and why it gave up.

Edge cases

- A fix follows the file by its path; renaming through MediaLedger keeps the fix attached.

4.6 Issues: Duplicates

Episodes that exist in more than one file, shown side by side so you can decide which to keep.

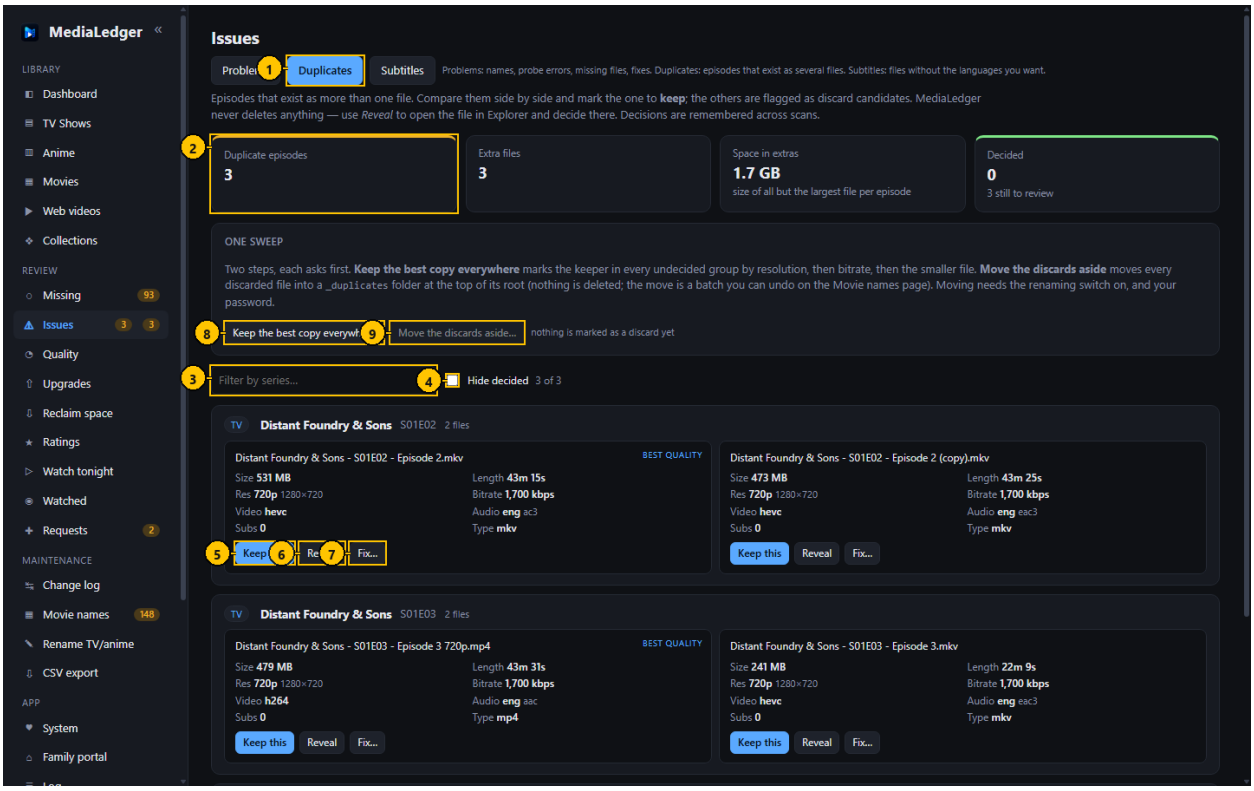


Figure 24. Issues: Duplicates. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Duplicates tab	Tab	This page.	–	–	–
2	Summary tiles	Tiles	Duplicate episodes, extra files and the space they take, decided and still to review.	–	–	–
3	Filter by series	Search field	Keeps the groups of that series.	–	empty	–
4	Hide decided	Check box	Hides the groups you have decided on.	–	off	–
5	Keep this	Button	Marks this copy as the one to keep.	–	–	–
6	Reveal	Button	Shows the file in its folder.	–	–	Desktop only; does nothing in a browser.
7	Fix	Button	Opens the Fix dialog, for a copy that is really a different episode.	–	–	–
8	Keep the best copy everywhere	Button	Marks the keeper in every undecided group: highest resolution, then bitrate, then the smaller file.	–	–	Asks first. Choices can be changed afterwards.
9	Move the discards aside	Button	Moves every discarded file into _duplicates at the top of its root, as an undoable batch. Nothing is deleted.	–	–	Needs the renaming switch and your password. Undo on the Movie names page.

Typical workflow

1. Compare the copies: resolution, bitrate, size, languages.
2. Press "Keep this" on the copy you want. The others are marked as the ones to remove.
3. Remove the others yourself; MediaLedger never deletes media.

Features

- "Hide decided" keeps the list to the ones still to review.

Edge cases

- A decision is a note, not an action. Nothing on the share changes.

4.7 Issues: Subtitles

Files that have no subtitles in the languages you want, as a track inside the file or as a sidecar beside it. Grouped by title, with where to look for subtitles.

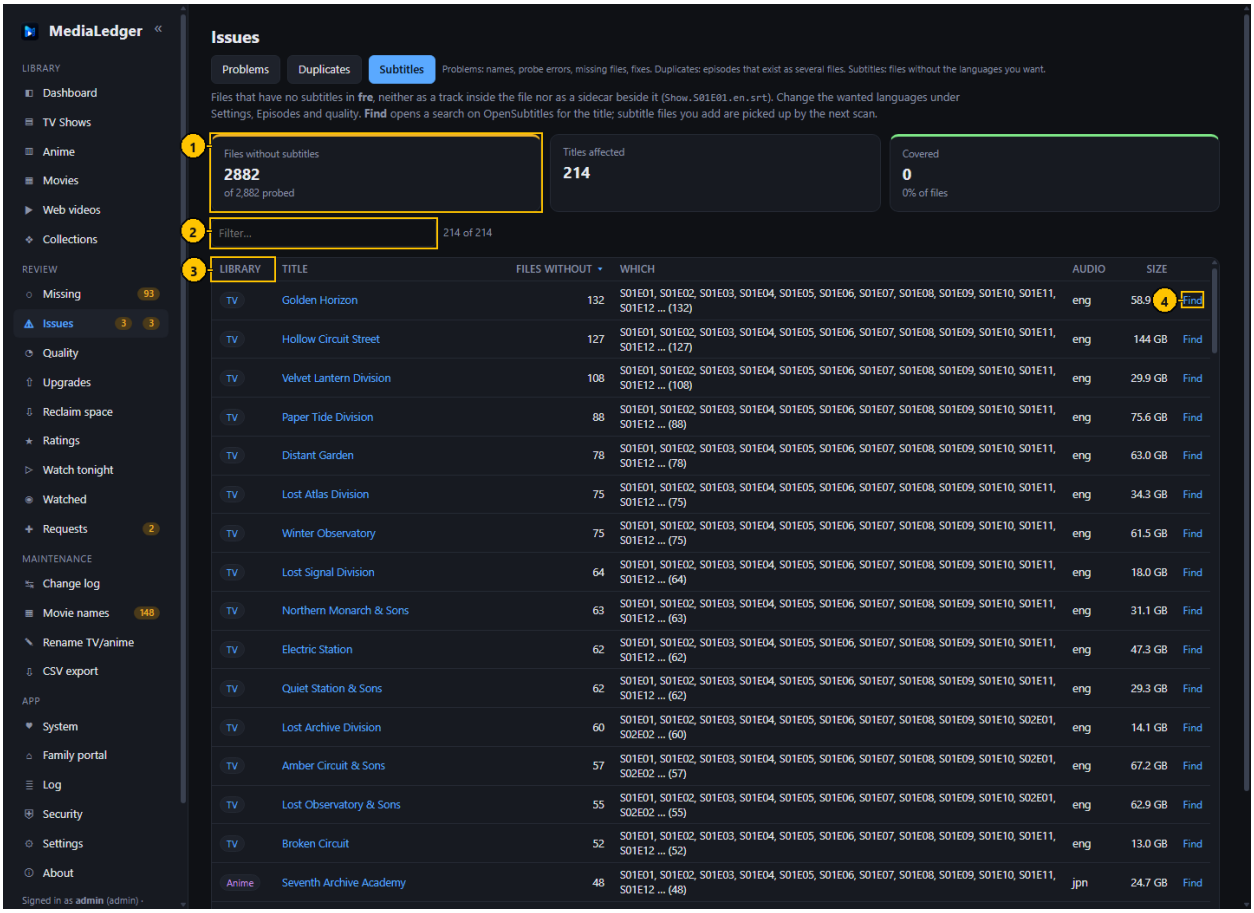


Figure 25. Issues: Subtitles. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Tiles	Tile	Files without subtitles, titles affected, files covered, sidecars without a language.	–	–	–
2	Filter	Search field	Narrows the table by title.	–	empty	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
3	Column heading	Button	Sorts by that column.	–	Files without, most first	–
4	Find	Link	Opens an OpenSubtitles search for the title in the first wanted language.	–	–	Opens in the browser.

Typical workflow

1. Set the wanted languages under Settings, Episodes and quality, Subtitles.
2. Open Issues, Subtitles. Sort by Files without to see the worst first.
3. Press Find on a title to search OpenSubtitles; put the file beside the video as Show.S01E01.en.srt.
4. The next scan picks the sidecar up and the title drops off the list.

Features

- A sidecar counts when its name carries a language tag (en, eng, ja…). One without a tag is counted separately as unknown.
- The Audio column shows the audio languages, which is often why a subtitle is wanted.
- The Subtitles dashboard card shows the same count.

Edge cases

- Forced-only subtitle tracks count as subtitles; the probe does not tell them apart.
- Files that were never probed are not listed, since nothing is known about them.

4.8 Quality

Finds the weak copies: series in mixed resolutions, files with a low bitrate for their resolution, audio without a language, files with no audio, and very short files.

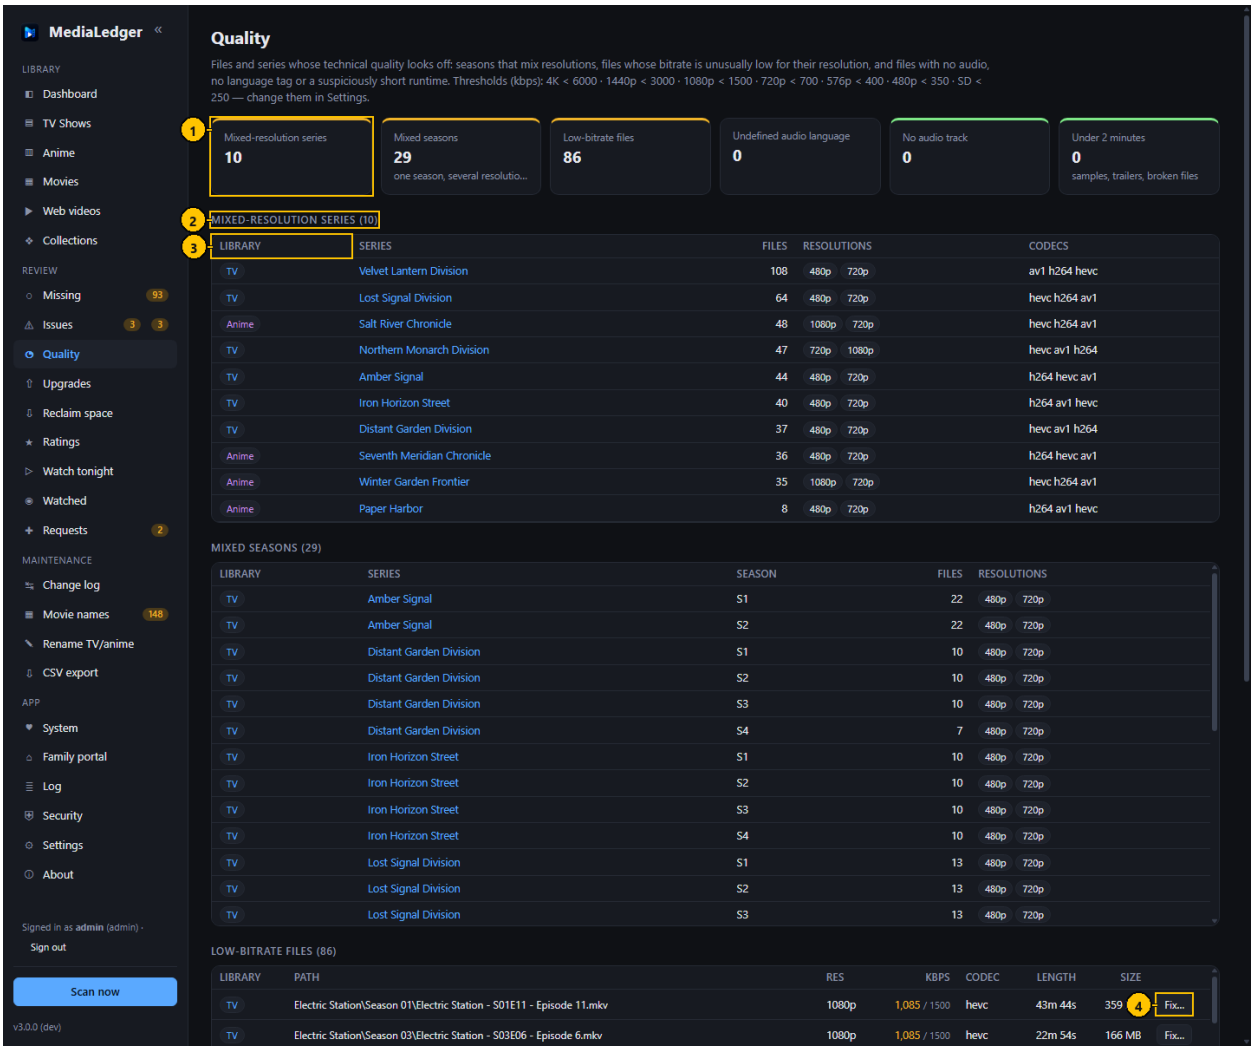


Figure 26. Quality. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Mixed-resolution series, low-bitrate files, undefined audio language, no audio track, under two minutes.	–	–	–
2	Section heading	Heading	Names the kind of finding and counts the rows.	–	–	–
3	Column heading	Sortable heading	Sorts that section.	–	–	–
4	Fix	Button	Opens the Fix dialog for that file.	–	–	–

Typical workflow

1. Read the tiles.
2. Open a section and sort by the column that matters.
3. Click a row to open the title.

Features

- The bitrate thresholds per resolution are set under Settings, Quality thresholds.

Edge cases

- "Undefined audio language" means the track has no language tag, not that the audio is missing.

4.9 Upgrade candidates

Ranks the titles most worth replacing with a better copy: those you watch and rate highly but hold in a low resolution or bitrate.

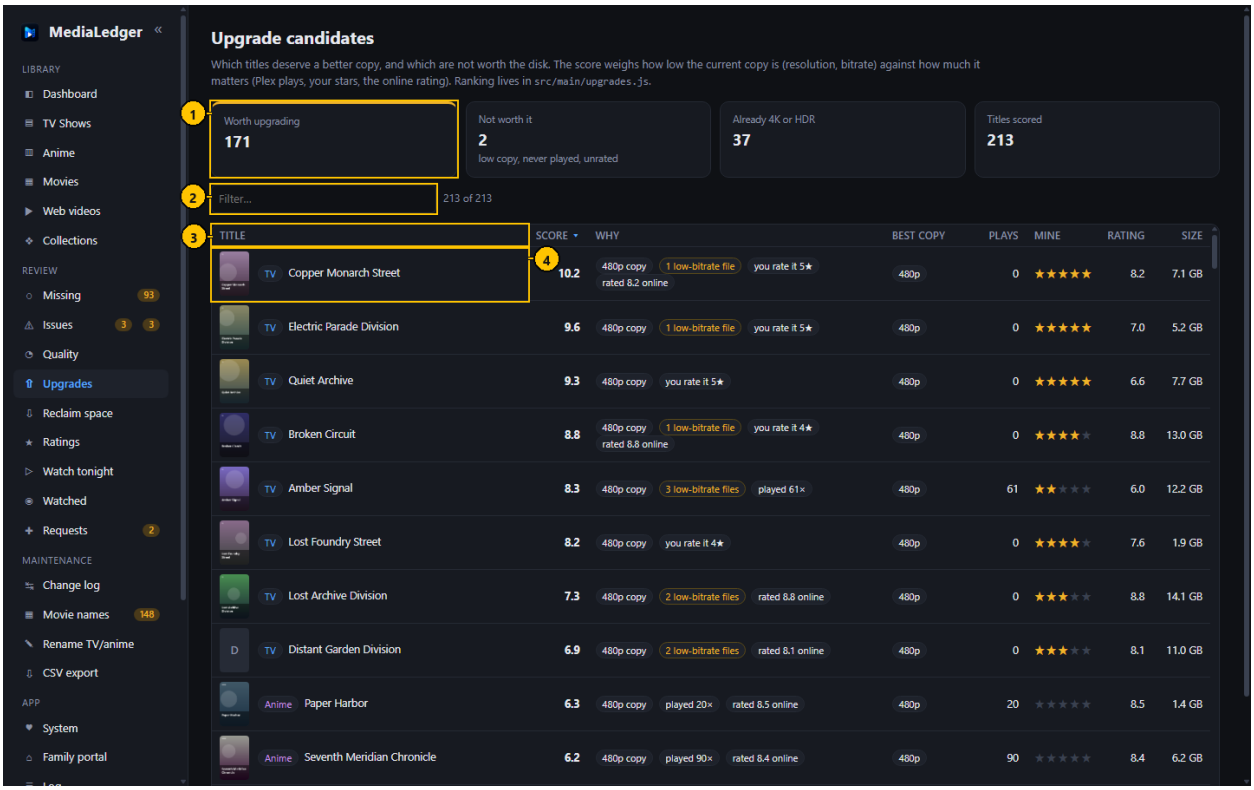


Figure 27. Upgrade candidates. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Worth upgrading, not worth it, and the totals behind them.	–	–	–
2	Filter	Search field	Keeps the titles that contain what you type.	–	empty	–
3	Column heading	Sortable heading	Sorts the table.	–	Score, highest first	–
4	Title	Cell	The title and its library.	–	–	–

Typical workflow

1. Work from the top of the list.
2. Read the reasons beside each score.
3. Click a row to open the title.

Features

- The score multiplies how far the copy falls short of 1080p (plus a low bitrate) by how much you care: plays, your stars, and the online rating.
- 4K and HDR copies score zero, and so does a title that was never played, is unrated and has a fine bitrate.

Edge cases

- Without a Plex sync there are no plays, so only your stars and the online rating count.

4.10 Reclaim space

The mirror image of Upgrades: large titles nobody on the Plex server has played for a long time, or ever. It is a list to think about; MediaLedger never deletes media.

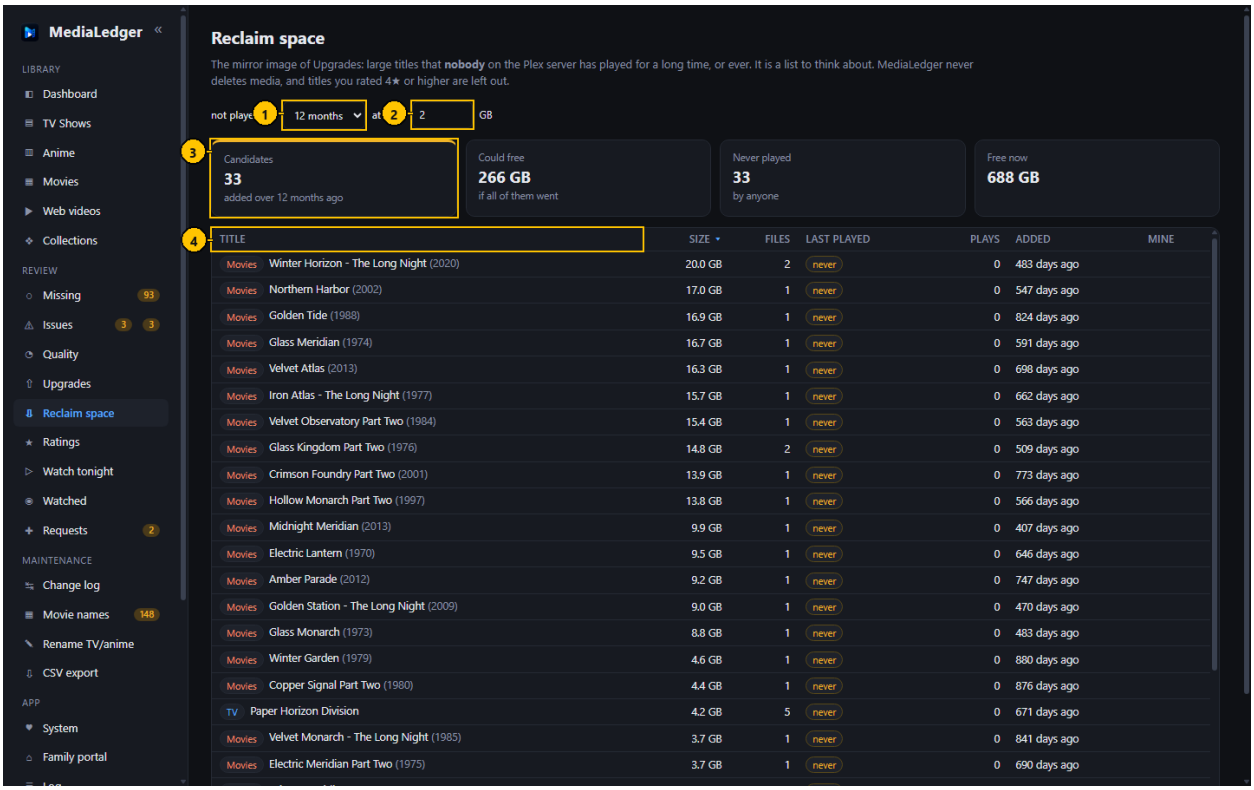


Figure 28. Reclaim space. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Not played for	Drop-down list	How long a title must have gone unplayed, and how long it must have been in the library.	6, 12, 24 or 36 months	12 months	Remembered in this browser.
2	At least	Number field	The smallest total size of a title worth listing, in gigabytes.	0 or more	2	–
3	Summary tiles	Tiles	Candidates, the space they hold together, how many were never played, free space now.	–	–	–
4	Column heading	Sortable heading	Sorts the table.	–	Size, largest first	–

Typical workflow

1. Choose the period and the smallest size worth listing.
2. Sort by size and work from the top.
3. Click a row to open the title.

Features

- "Played" covers every Plex account, from the play history.
- Titles you rated four stars or higher are left out.

Edge cases

- "Added" is the older of the file's own date and the day MediaLedger first saw it, so a young ledger does not make everything look new.
- On a machine with no Plex sync every title reads as unplayed; the page says so rather than imply the whole library is dead weight.

Messages and what they mean

Message	Meaning and what to do
`None of these titles is linked to Plex on this machine`	There is no play data behind the list. Sync Plex here, or open the page on the server that does.

4.11 Ratings

Your own rating and note for every title, next to the online rating and your Plex rating.

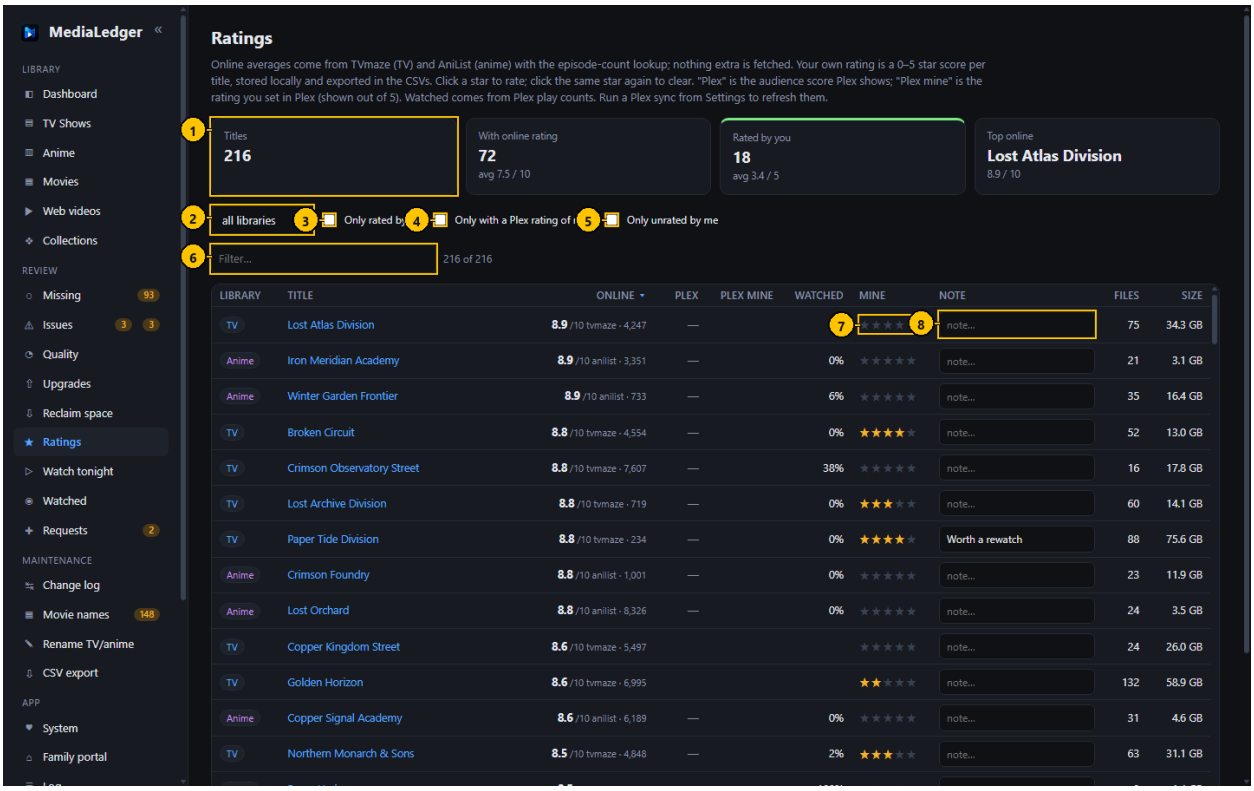


Figure 29. Ratings. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Titles, rated by you with the average, rated in Plex, online ratings known.	–	–	–
2	Library	Drop-down list	Keeps one library.	all libraries, TV, Anime, Movies, Web channels	all libraries	–
3	Rated by me	Check box	Keeps the titles you have rated.	–	off	–
4	With my Plex rating	Check box	Keeps the titles you rated in Plex.	–	off	–
5	Not rated yet	Check box	Keeps the titles you have not rated.	–	off	–
6	Filter	Search field	Keeps the titles that contain what you type.	–	empty	–
7	Stars	Rating control	Your rating of the title.	1 to 5 stars	none	Click the same star again to clear.
8	Note	Text field	A note of your own.	Free text	empty	Saved when you leave the field.

Typical workflow

1. Click a star to rate; click the same star again to clear.
2. Type a note and leave the field to save it.
3. Use the check boxes to list only what you rated, or only what you have not.

Features

- Your stars and notes are exported in the series and movie CSV files.
- Stars feed the Upgrades ranking and protect titles on the Reclaim page.

Edge cases

- Your notes are never shown on the family portal; your stars are, unless you switch that off there.

4.12 Watch tonight

One list across every series and movie, made for the "what shall we watch" moment.

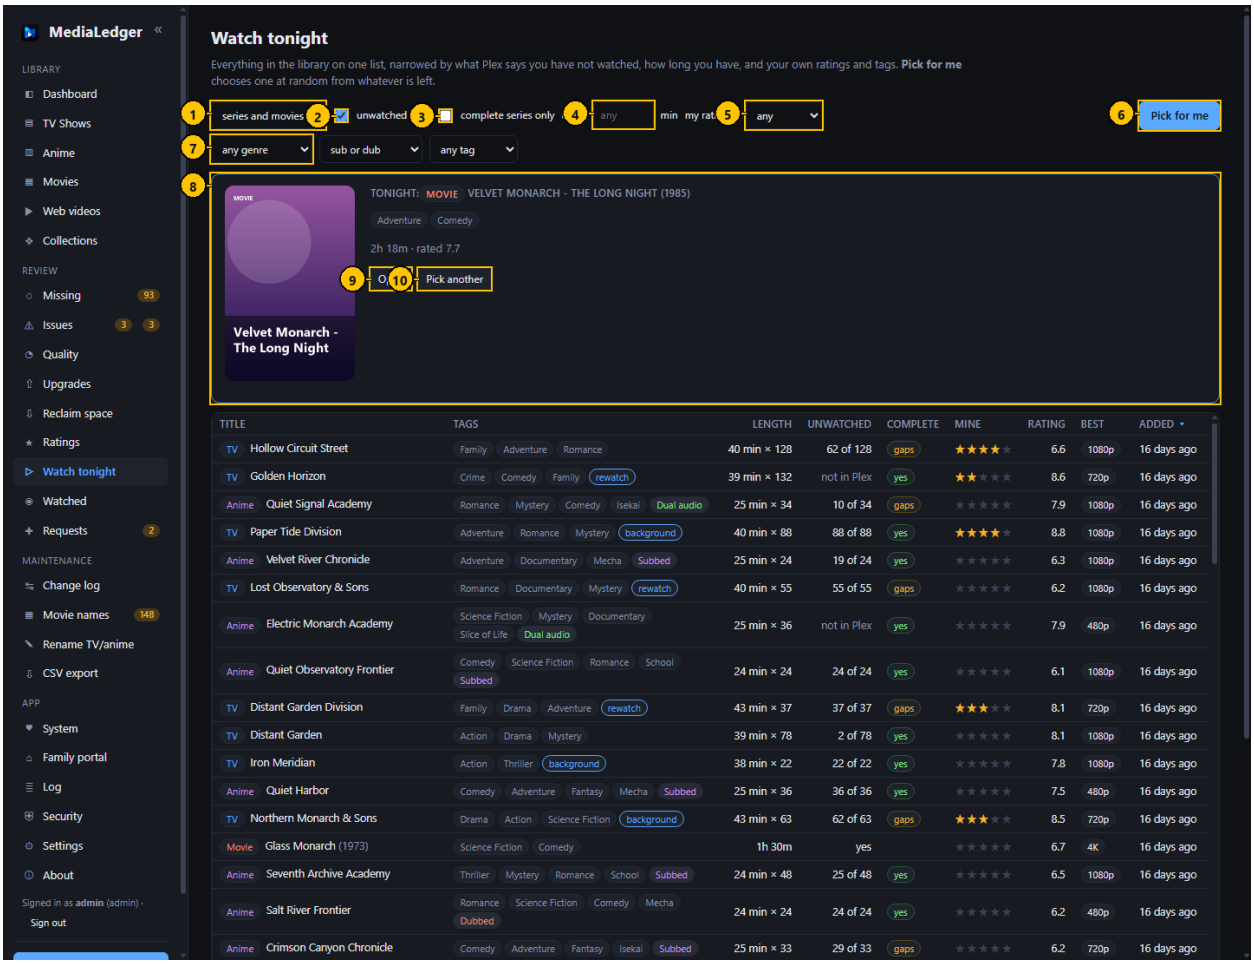


Figure 30. Watch tonight. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Kind	Drop-down list	Series, movies or both.	–	series and movies	–
2	Unwatched only	Check box	Keeps the titles with something left to watch.	–	on	From Plex play counts.
3	Complete series only	Check box	Keeps the series with no missing episodes.	–	off	–
4	Up to … minutes	Number field	The longest length you have time for.	Minutes, in steps of 5	any	–
5	My rating at least	Drop-down list	Keeps the titles you rated that high or higher.	any, 1 to 5 stars	any	–
6	Pick for me	Button	Chooses one title at random from the filtered list.	–	–	–
7	Genre	Drop-down list	Keeps the titles with that genre.	–	any genre	–
8	Tonight	Card	The title that was picked, with its poster, length and rating.	–	–	–
9	Open	Button	Opens the picked title.	–	–	–
10	Pick another	Button	Picks again.	–	–	–

Typical workflow

1. Choose series, movies or both.
2. Leave "unwatched only" ticked, set how long you have, and pick a genre or tag.
3. Press "Pick for me" to have one chosen at random from what is left.
4. Press Open to go to the title, or Pick another.

Features

- The choices are remembered in this browser.
- Length is the episode length for a series and the running time for a movie.

Edge cases

- Titles Plex does not have stay in the list when "unwatched only" is ticked, because nothing says they were watched.
- "Complete series only" needs an online match; unmatched series are left out.

Messages and what they mean

Message	Meaning and what to do
`Nothing matches; loosen the filters`	No title passes every filter.

4.13 Watched

The play history of the whole Plex server: who watched what, when, and on which device.

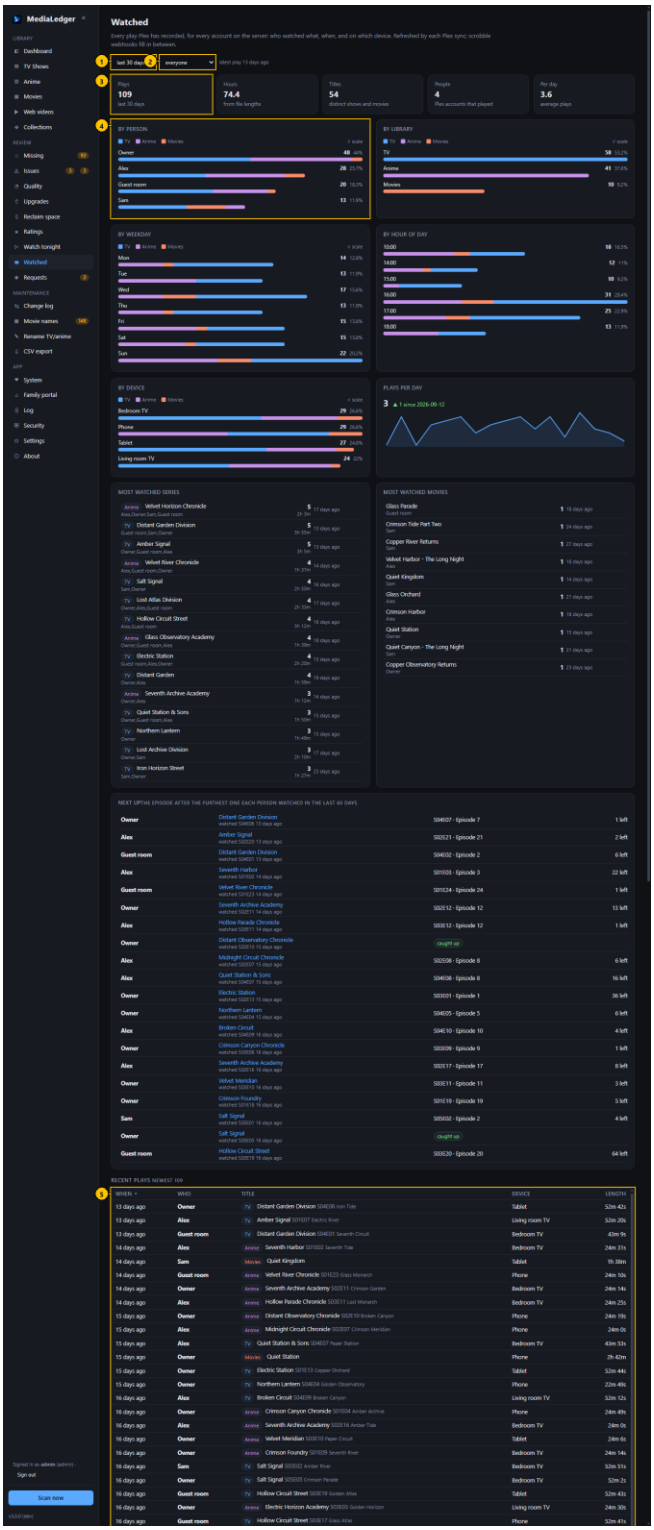


Figure 31. Watched. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Period	Drop-down list	The period the page covers.	last 7, 30 or 90 days, last year, all time	last 30 days	Remembered in this browser.
2	Person	Drop-down list	Keeps the plays of one Plex account.	Every account, with its play count	everyone	–
3	Summary tiles	Tiles	Plays, hours (from the lengths of the files), distinct titles, people, average plays per day.	–	–	–
4	Charts	Charts	By person, by library, by weekday, by hour of day, by device, and plays per day.	–	–	Weekday and hour use a linear scale.
5	Recent plays	Table	The newest plays: when, who, title, device, length.	–	500 rows	Searchable and sortable.

Typical workflow

1. Choose the period and, if you like, one person.
2. Read the tiles and the charts.
3. Scroll to Recent plays and search it; click a row to open the title.

Features

- Charts by person, library, weekday, hour of day and device, and plays per day.
- Most watched series and movies with who watched them.
- Next up: for each person and show, the episode after the furthest one they watched in the last 60 days.
- Binges: sittings of three or more episodes of one show.

Edge cases

- Plays are attributed by Plex account; a shared account shows as one person.
- Plex keeps history only as far back as its own setting allows.
- Each Plex sync pulls new history; the webhook adds plays in between and the next sync replaces those rows with Plex's own, so nothing is counted twice.

Messages and what they mean

Message	Meaning and what to do
`Nothing here yet`	No history has been pulled. Run a Plex sync.

4.14 Requests

A wish list for the library. Anyone who can open the application may ask for a title; only an administrator decides.

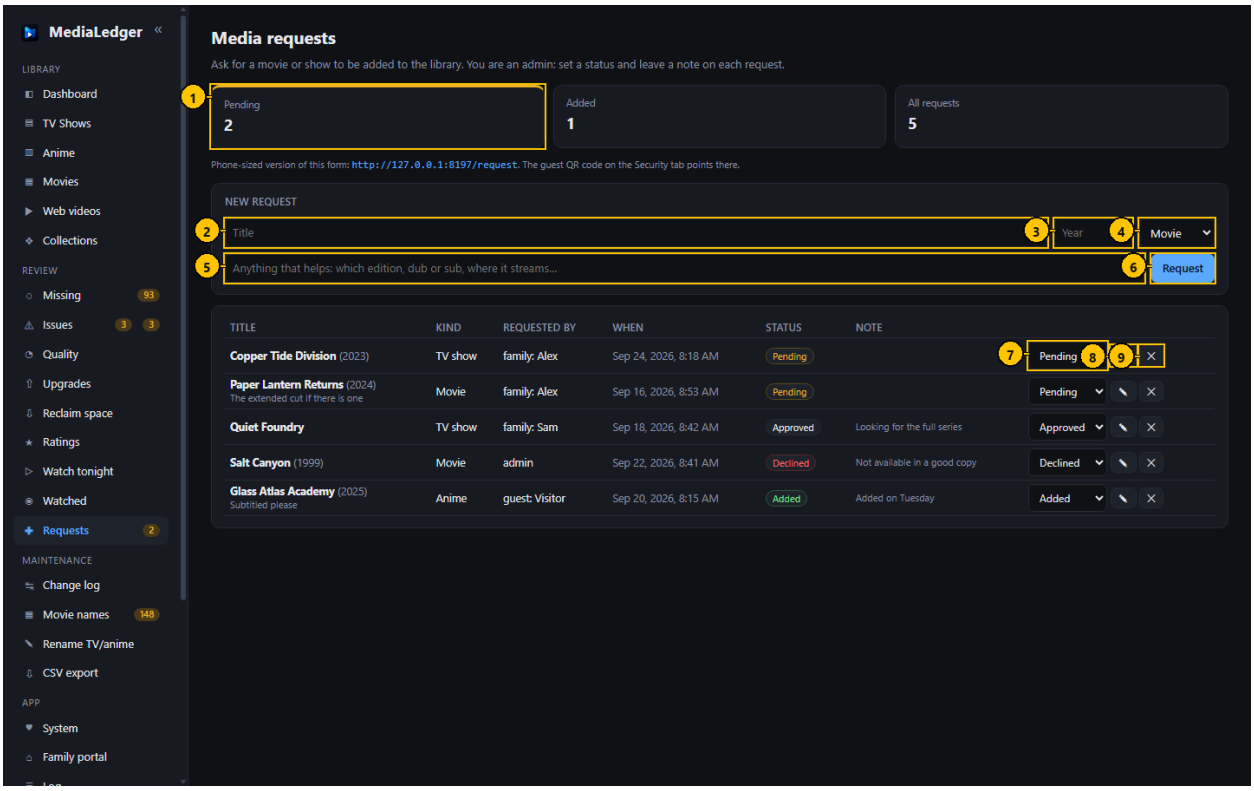


Figure 32. Requests. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Pending, added and all requests.	–	–	–
2	Title	Text field	What is being asked for.	Up to 120 characters	empty	–
3	Year	Number field	The year of release, to tell remakes apart.	1900 to 2100	empty	Optional.
4	Kind	Drop-down list	Movie, TV show, Anime or Other.	–	Movie	–
5	Note	Text field	Edition, dub or sub, where it streams.	Free text	empty	Optional.
6	Request	Button	Files the request.	–	–	–
7	Status	Drop-down list	Sets the status of that request.	Pending, Approved, Added, Declined	Pending	Administrators only.
8	Note to the requester	Button	Writes a note the requester can read.	–	–	Administrators only.
9	Delete	Button	Deletes the request.	–	–	Administrators only. Asks first.

Typical workflow

1. Type the title, the year if you know it, the kind, and anything that helps.
2. Press Request.
3. As an administrator: set the status, leave a note for the person who asked, or delete the request.

Features

- Statuses: Pending, Approved, Added, Declined.
- Requests from the family portal arrive marked "family:" and the name on the invite; guests type their own name.
- A notification is sent for every new request when notifications are set up.

Edge cases

- Requests do not download anything and do not talk to Plex.

4.15 Request page for phones

A page with nothing on it but the request form, sized for a phone. The guest QR code on the Security page points here.

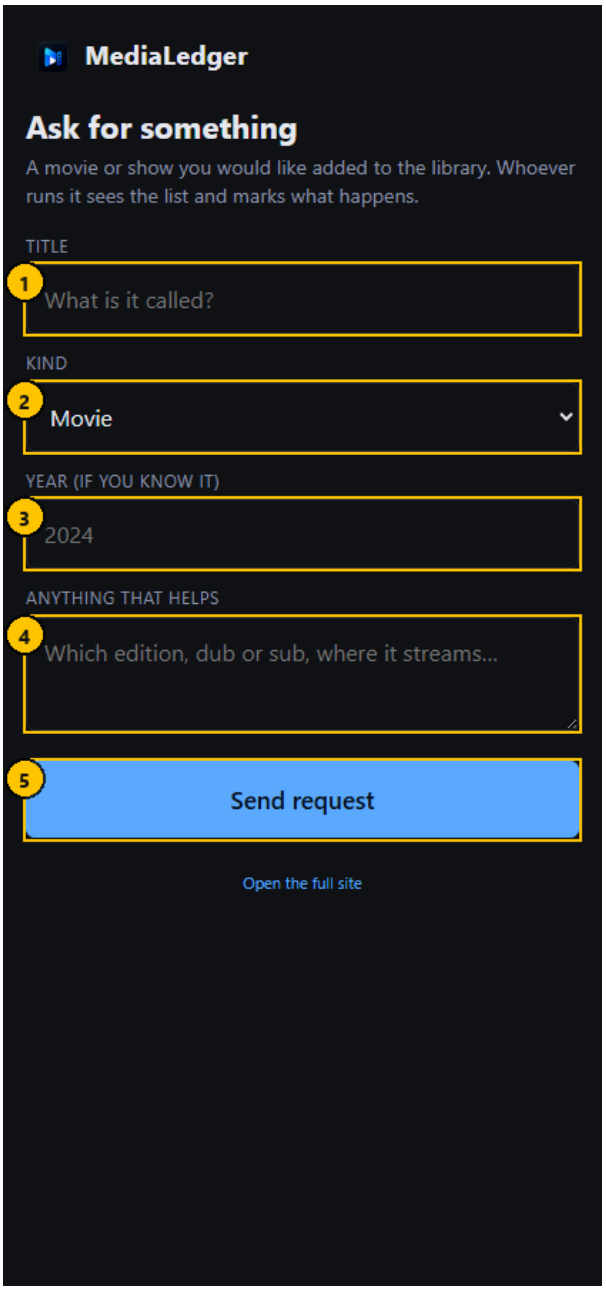


Figure 33. Request page for phones. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Title	Text field	What should be added.	Up to 120 characters	empty	–
2	Kind	Drop-down list	Movie, TV show, Anime or Other.	–	Movie	–
3	Year	Number field	The year of release.	–	empty	Optional.
4	Note	Text area	Anything that helps.	–	empty	Optional.
5	Send request	Button	Files the request.	–	–	–

Typical workflow

1. Scan the QR code or open the address ending in /request.
2. Type your name once; the phone remembers it.
3. Type the title and press Send request.

Edge cases

- Guest access must be enabled on the Security page, otherwise the page asks the visitor to sign in.

5. Maintenance

The tools that change things. The two rename pages are the only part of MediaLedger that writes to your share.

5.1 Change log

What each scan found: files added, removed, modified and returned. It is how you notice that a folder emptied or a batch of files was replaced.

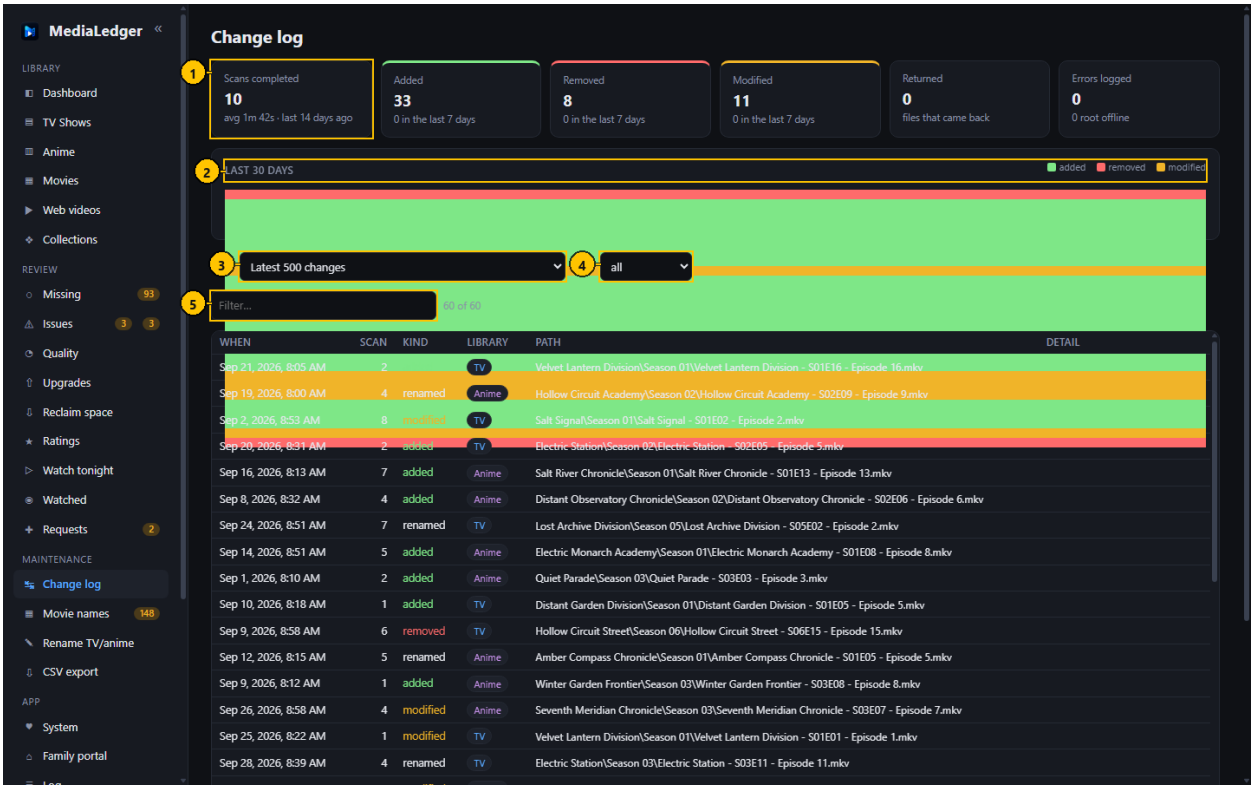


Figure 34. Change log. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Scans completed with their average length, and files added, removed and modified.	–	–	–
2	30-day chart	Chart	Changes per day by kind.	–	–	–
3	Scan	Drop-down list	Shows the changes of one scan.	The latest 500 changes, or any recent scan	Latest 500 changes	–
4	Kind	Drop-down list	Keeps one kind of change.	added, removed, modified, returned, probe error, renamed	all	–
5	Filter	Search field	Keeps the paths that contain what you type.	–	empty	–

Typical workflow

1. Read the tiles and the 30-day chart.
2. Pick one scan, or leave it on the latest 500 changes.
3. Pick a kind and type in the filter box to narrow the list.

Features

- "returned" marks a file that had vanished and came back.
- Renames made through MediaLedger are recorded as renames, not as a removal and an addition.

Edge cases

- "modified" means the size or the date of the file changed; the file is probed again.

5.2 Movie names

Proposes tidy names for movie files and renames them in batches. With Rename TV / anime it is the only part of MediaLedger that writes to your share.

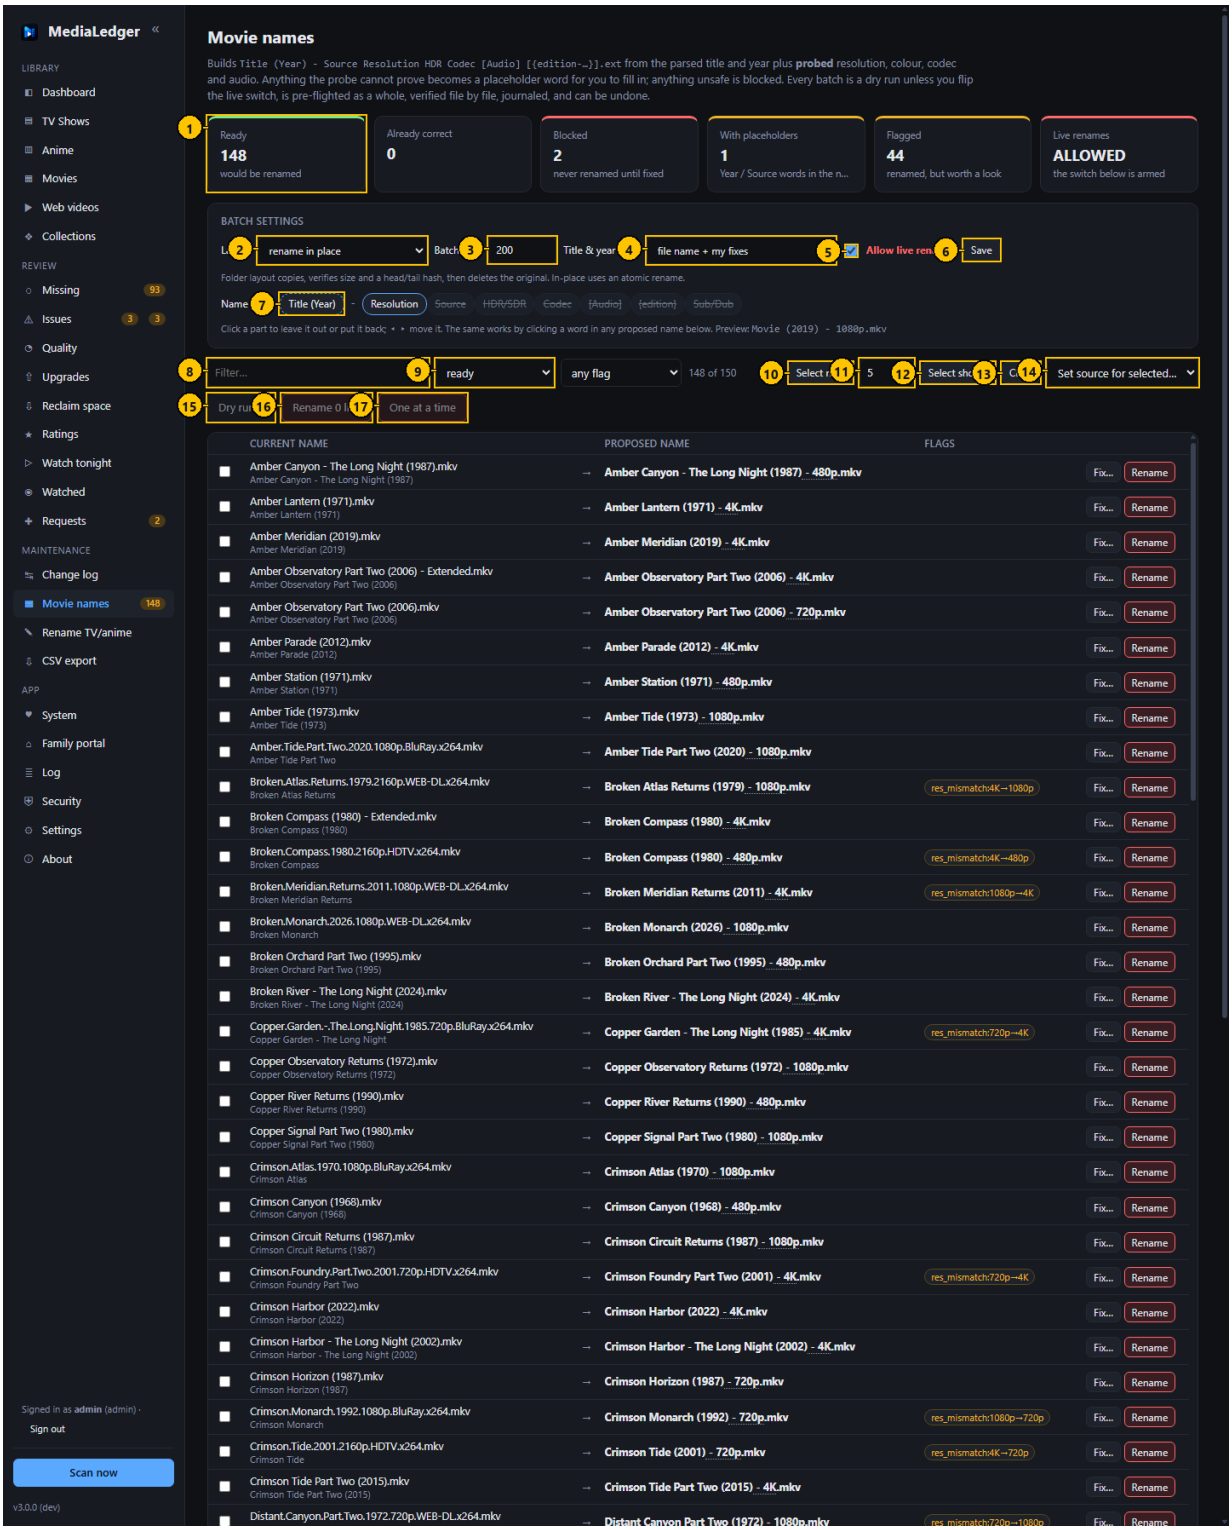


Figure 35. Movie names. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Ready, flagged, blocked, already tidy, and renamed so far.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
2	Layout	Drop-down list	Rename in place, or also move each movie into a folder named "Title (Year)".	–	rename in place	–
3	Batch limit	Number field	The most files one batch may rename.	1 to 5000	200	A safety stop, enforced by the server as well.
4	Source of the title	Drop-down list	Whether the name is built from the file name and your fixes, or from the Plex match.	–	file name + my fixes	–
5	Live renaming allowed	Check box	Arms the live button. While it is off only dry runs are possible.	–	off	–
6	Save	Button	Saves the batch settings.	–	–	–
7	Name parts	Chips	Click a part to leave it out of the name or put it back.	Title (Year) is fixed; Source, Resolution, Dynamic range, Codec, Audio, Edition and Sub/Dub are optional	Source, Resolution, Dynamic range, Codec, Audio, Edition	The proposed names update at once.
8	Filter	Search field	Keeps the files that contain what you type.	–	empty	–
9	Status	Drop-down list	Keeps ready, flagged, placeholder or blocked files.	–	ready	–
10	Select next	Button	Clears the selection and ticks only the next group of listed files.	–	–	After the batch those files leave the list, so pressing it again takes the following group.
11	How many	Number field	The size of the group "Select next" ticks.	1 to 200	10	Remembered in this browser.
12	Select shown	Button	Ticks every ready file in the list.	–	–	Asks first above 50.
13	Clear	Button	Unticks everything.	–	–	–
14	Set source for selected	Drop-down list	Records where the ticked copies came from, for the Source part of the name.	Web, Rip, Broadcast and others	–	–
15	Dry run	Button	Runs the batch without touching any file and records the result.	–	–	–
16	Rename live	Button	Renames the ticked files.	–	–	Disabled until live renaming is allowed.
17	One at a time	Button	Walks through the ticked files, asking before each.	–	–	–

Typical workflow

1. Choose the parts of the name by clicking the chips; the preview shows the result.
2. Set the layout and the batch limit and press Save.
3. Press "Select next" to tick a small group, check the proposed names.
4. Press "Dry run" first: it records what would happen and changes nothing.
5. Press "Rename live" when the dry run looks right.
6. Use Undo in the Batches table if you change your mind.

Features

- Every file is Ready, Flagged or Blocked. Blocked files are never renamed until the cause is fixed.
- A batch is checked as a whole before anything is renamed: the file is still there, its size is unchanged, the new name is free, the folder is writable.
- Each rename is verified and written to a journal. The Batches table at the bottom of the page lists every batch with its mode, status and counts; Items lists its files and Undo renames them back after checking each one.

Edge cases

- "Select shown" asks first when more than 50 files would be ticked.
- Two files that would end up with the same name are listed under Name collisions and neither is renamed.
- Renaming is off until you switch it on under Settings, Renaming.

Messages and what they mean

Message	Meaning and what to do
`Renaming is off`	Switch it on under Settings, Renaming.
`target exists`	A file with the proposed name is already there. Nothing is overwritten.
`size changed since the scan`	The file was altered after it was scanned. Scan again.

5.3 Rename TV / anime

The same batch engine for episodes: proposes "Show - S01E02 - Title" and renames in place.

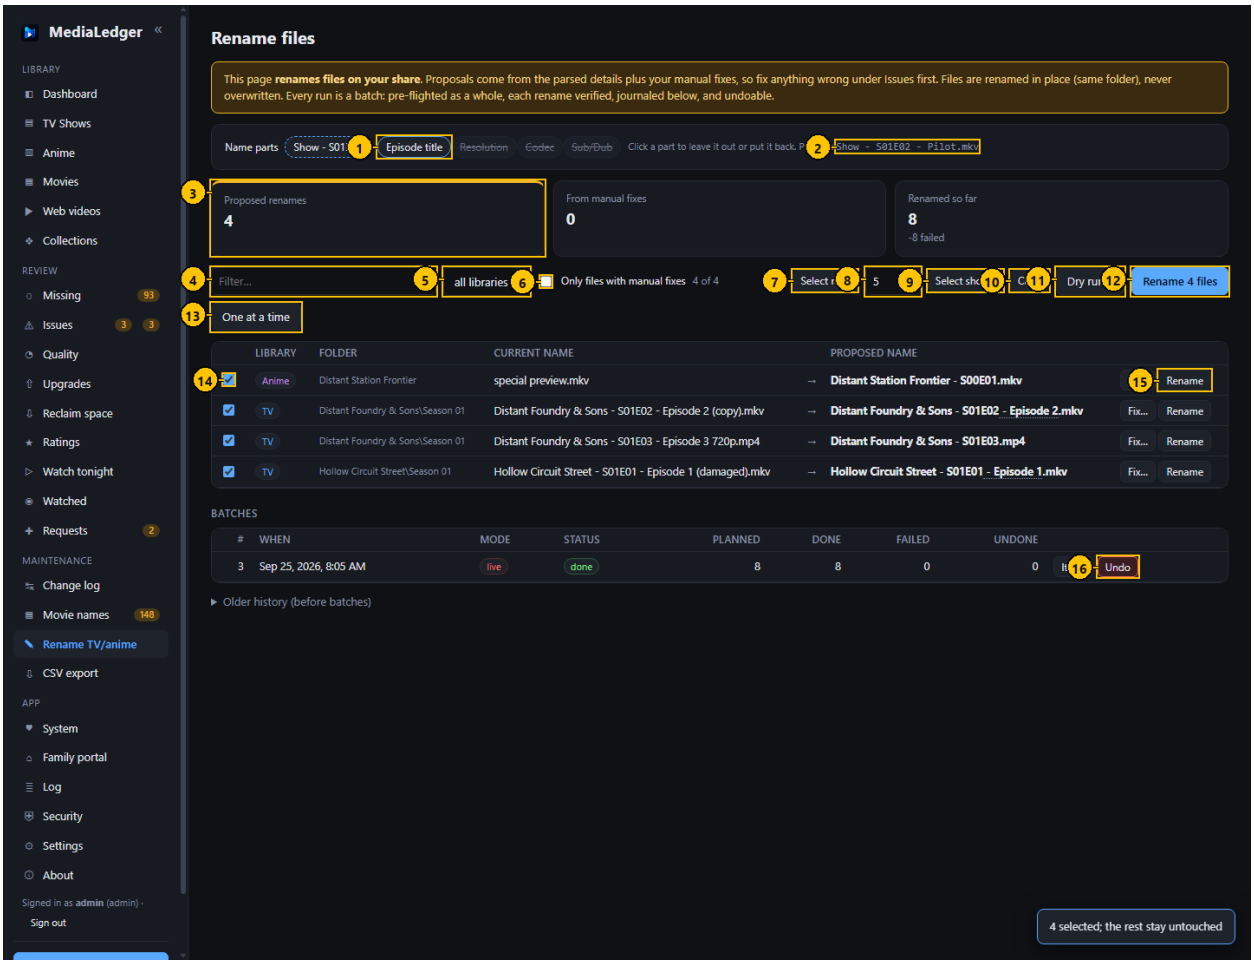


Figure 36. Rename TV / anime. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Name parts	Chips	Click a part to leave it out or put it back.	Episode title, Resolution, Codec, Sub/Dub	Episode title	"Show - S01E02" is fixed, because Plex matches on it.
2	Preview	Label	An example of the name the chosen parts produce.	–	–	–
3	Summary tiles	Tiles	Proposed renames, how many come from your fixes, renamed so far.	–	–	–
4	Filter	Search field	Keeps the files that contain what you type.	–	empty	–
5	Library	Drop-down list	Keeps one library.	–	all libraries	–
6	Only files with manual fixes	Check box	Keeps the files whose proposal comes from a fix of yours.	–	off	–
7	Select next	Button	Clears the selection and ticks only the next group.	–	–	–
8	How many	Number field	The size of that group.	1 to 200	10	Remembered in this browser.
9	Select shown	Button	Ticks every file in the list.	–	–	Asks first above 50.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
10	Clear	Button	Unticks everything.	–	–	–
11	Dry run	Button	Shows what would happen to the ticked files.	–	–	–
12	Rename	Button	Opens the confirmation for the ticked files.	–	–	–
13	One at a time	Button	Walks through the ticked files, asking before each.	–	–	–
14	Tick box	Check box	Includes that file in the batch.	–	off	–
15	Rename this file	Button	Renames that one file after a confirmation.	–	–	–
16	Undo	Button	Renames the files of that batch back.	–	–	–

Typical workflow

1. Choose the name parts with the chips.
2. Set the number beside "Select next" and press it.
3. Check the ticked rows: current name on the left, proposed name on the right.
4. Press "Dry run", then "Rename".
5. Repeat for the next group.

Features

- Files are renamed in their folder, never moved and never overwritten.
- A rename button on each row renames just that file.

Edge cases

- Proposals come from the parsed details plus your fixes, so correct anything wrong under Issues first.
- While a batch runs, scans are held back.

Messages and what they mean

Message	Meaning and what to do
`scan skipped: rename batch in progress`	A scan was due while a batch was running. It runs at the next opportunity.

5.4 Rename confirmation dialog

The last stop before files are renamed: it lists every file and its new name.

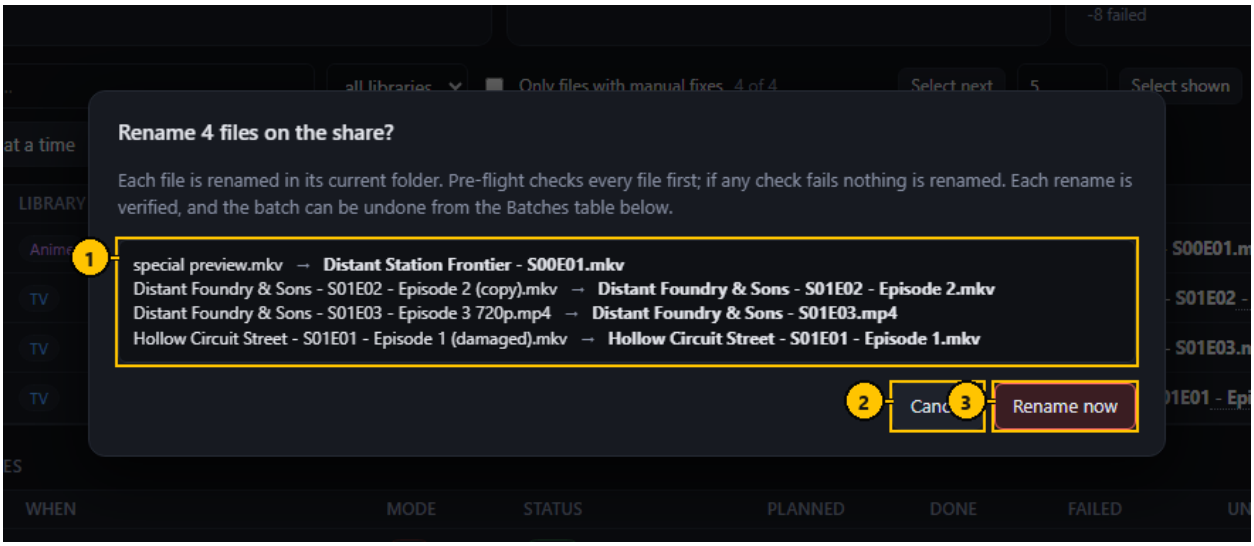


Figure 37. Rename confirmation dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	What will be renamed	List	Each current name and the name it will get.	–	–	–
2	Cancel	Button	Closes without renaming.	–	–	–
3	Rename now	Button	Runs the batch.	–	–	–

Typical workflow

1. Read the list.
2. Press "Rename now", or Cancel.

Features

- If any check fails, nothing is renamed.

5.5 CSV export

Writes the library to CSV files for a spreadsheet or another tool.

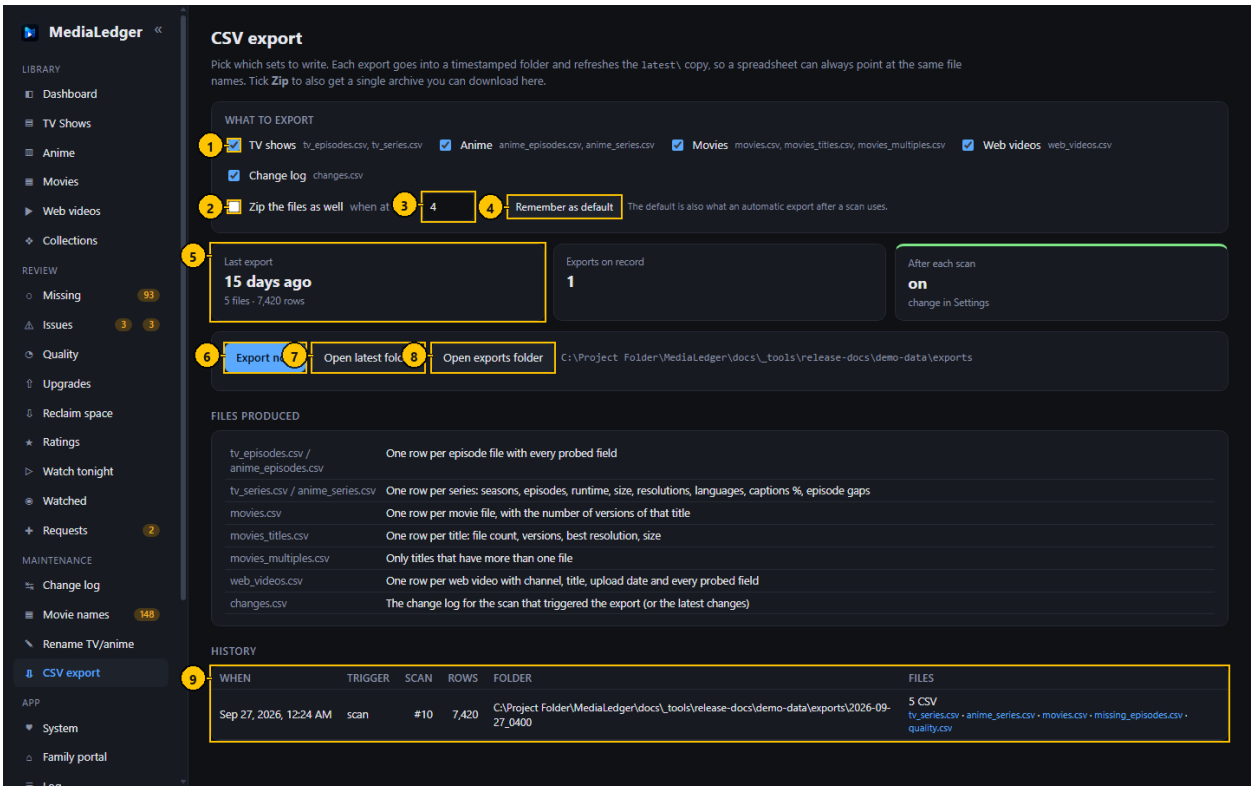


Figure 38. CSV export. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Sets to export	Check boxes	Which files to write.	–	TV, Anime, Movies, Web videos, Changes	–
2	Zip the files	Check box	Puts the files of one export in a single zip file.	–	off	–
3	Zip when more than	Number field	The number of files above which a zip file is made.	1 or more	4	–
4	Remember as default	Button	Saves the ticks for the automatic export.	–	–	–
5	Summary tiles	Tiles	The last export, and whether exports run after each scan.	–	–	–
6	Export now	Button	Writes the ticked sets.	–	–	–
7	Open latest folder	Button	Opens the folder of the newest export.	–	–	Desktop only.
8	Open exports folder	Button	Opens the folder that holds every export.	–	–	Desktop only.
9	History	Table	Past exports with their files; on the web server each file is a download link.	–	–	–

Typical workflow

1. Tick the sets you want.
2. Choose whether to put them in one zip file.

3. Press "Export now".
4. Download the files from History, or open the folder on the desktop.

Features

- Sets: TV series, anime series, movies, episodes, missing episodes, quality, changes, requests and web videos.
- An export can run by itself after every scan.

Edge cases

- A zip file is made only when more files are exported than the number beside the check box.
- Adult titles are left out unless you allow them under Settings, Adult content.

6. Application

The application itself: the machine it runs on, who may use it, and what it has been doing.

6.1 System

Watches the machine MediaLedger runs on. On the Raspberry Pi that is the board itself, where temperature and power matter.

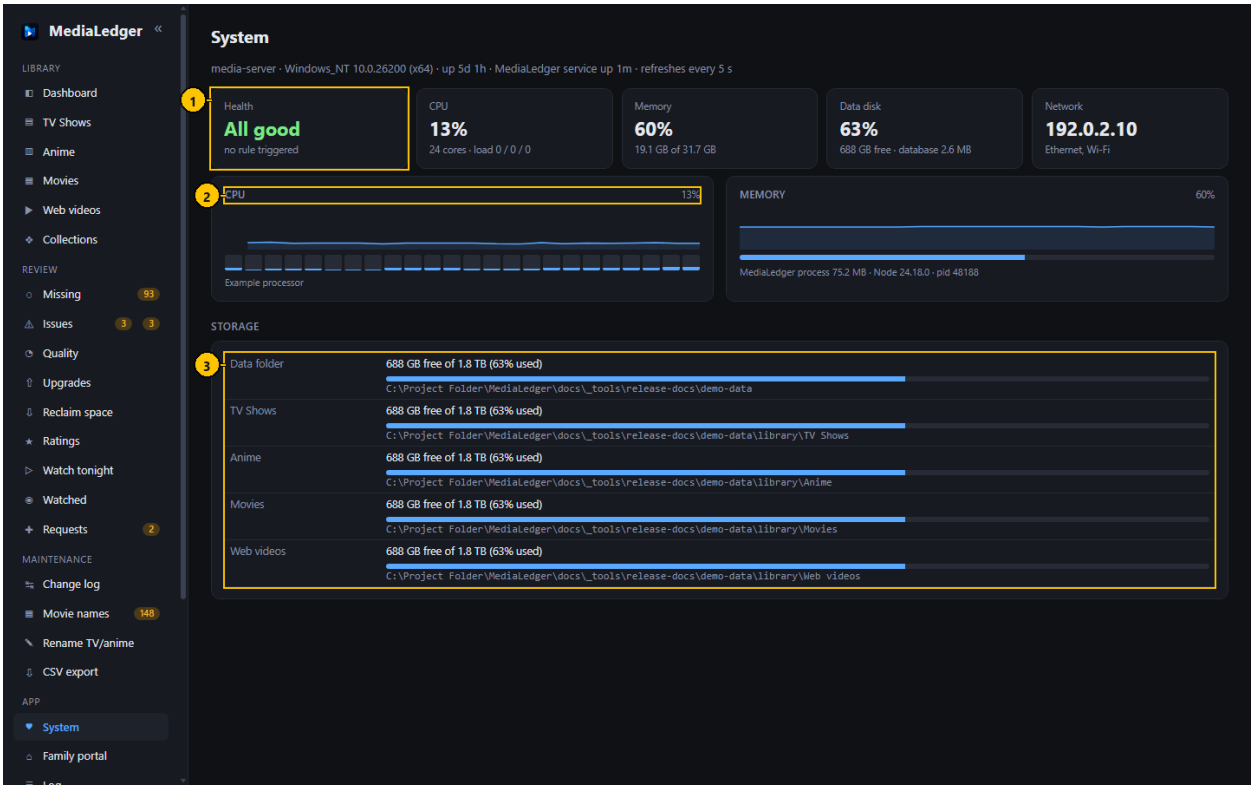


Figure 39. System. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Summary tiles	Tiles	Health, processor, memory, data disk, and on a Raspberry Pi the chip temperature.	–	–	–
2	Charts	Charts	Processor per core, memory, temperature, network.	–	–	–
3	Storage	Table	Free space of every root with a bar.	–	–	–

Typical workflow

1. Read the Health tile: All good, Attention or Problem, with the rules that triggered.
2. Read the charts for the last few minutes.
3. Read Storage for the free space on every root.

Features

- Sampled every five seconds while the page is open.

- On a Raspberry Pi: chip temperature, clock speed, core voltage, throttling and under-voltage.

Edge cases

- The figures in this manual come from the computer the screenshots were made on.

Messages and what they mean

Message	Meaning and what to do
`not reachable`	A root or disk could not be read. Check the mount.

6.2 Family portal (administration)

Runs the family portal: a second, separate site for people you invite, where they can browse the libraries, pick something for tonight and send requests, and nothing else.

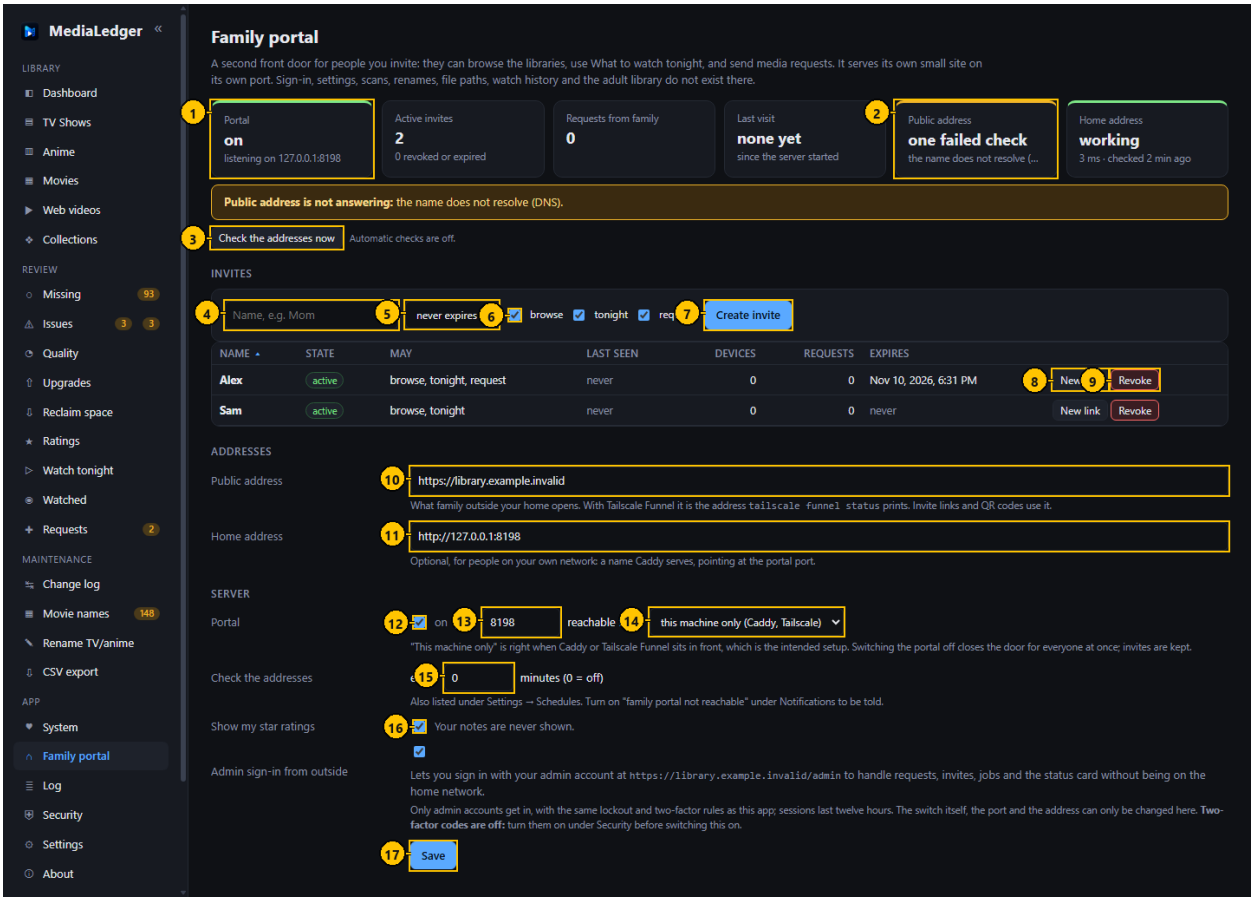


Figure 40. Family portal (administration). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Portal	Tile	Whether the portal is on and listening.	–	–	–
2	Public address	Tile	Whether the public address works, the response time, when it was checked, and the days left on its certificate.	–	–	Amber after one failed check, red after two.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
3	Check the addresses now	Button	Tests both addresses at once.	–	–	–
4	Name	Text field	Who the invite is for. Requests arrive under this name.	Up to 40 characters	empty	–
5	Expires	Drop-down list	How long the invite works.	never, 7 days, 30 days, 1 year	never expires	–
6	May browse, use tonight, request	Check boxes	What the person may do.	–	All three	–
7	Create invite	Button	Creates the invite and shows its link and QR code once.	–	–	Asks for your password again on the web server.
8	New link	Button	Makes a new link; the old link and every device using it stop working.	–	–	–
9	Revoke	Button	Ends that person's access at once.	–	–	–
10	Public address	Text field	What people away from home open.	https://name	empty	With Tailscale Funnel, the address the funnel command prints.
11	Home address	Text field	A name served on your own network.	http:// or https://name	empty	Optional.
12	Portal on	Check box	Starts or stops the portal.	–	off	–
13	Port	Number field	The port the portal listens on.	1024 to 65535	8090	–
14	Reachable from	Drop-down list	This machine only, or the whole network.	–	this machine only	Keep "this machine only" when Caddy or Tailscale is in front.
15	Check the addresses every	Number field	Minutes between automatic checks.	0 (off) or 1 to 1440	15	–
16	Show my star ratings	Check box	Whether the portal shows your stars.	–	on	Your notes are never shown.
17	Save	Button	Saves the addresses and the server settings.	–	–	–

Typical workflow

1. Set the public address (and a home address if you serve one) and press Save.
2. Tick "on" and press Save.
3. Type a name, choose an expiry and what the person may do, press "Create invite".
4. Send the link or let them scan the QR code. It is shown once.
5. Use "New link" or "Revoke" in the table when needed.

Features

- The portal is its own listener on its own port with its own short list of operations; sign-in, settings, scans, renames and logs do not exist there.
- Replies are built from a fixed list of fields, so paths, Plex keys, watch history and notes never leave the server; adult titles are never included.
- The server tests its own addresses on a timer and tells you when one stops working.

Edge cases

- "Create invite" is disabled until an address is set, because the link is built from it.

- Only a fingerprint of each link is stored; a lost link cannot be shown again, only replaced.
- Switching the portal off closes it for everyone at once and keeps the invites.

Messages and what they mean

Message	Meaning and what to do
`Set a public or home address first`	An invite needs an address to build its link.
`<name> already has an active invite; use New link on it`	One active invite per name.
`port N is already in use`	Another program listens on that port. Choose another.
`the name does not resolve (DNS)`	The address check could not look the name up. A new Tailscale address takes about fifteen minutes to appear.
`a different MediaLedger portal answers on this address`	The name points at another server.

6.3 Invite created, with its QR code

What appears after "Create invite" or "New link": the link and its QR code, once.

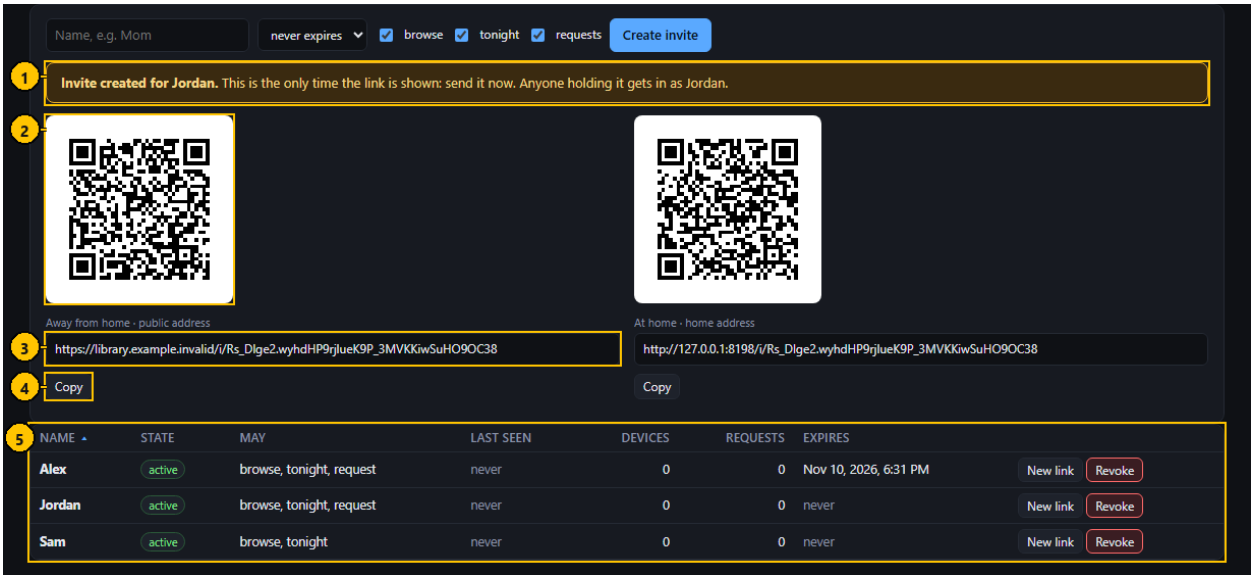


Figure 41. Invite created, with its QR code. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Notice	Notice	Says who the invite is for and that the link is shown only now.	–	–	–
2	QR code	Image	The link as a code for a phone camera.	–	–	–
3	Link	Text field	The link as text. Click to select it.	–	–	Read-only.
4	Copy	Button	Copies the link.	–	–	–
5	Invites	Table	Every invite: state, permissions, last seen, devices, requests, expiry.	–	–	–

Typical workflow

1. Scan the code with the phone that should get access, or copy the link and send it.

2. The phone opens the portal and is remembered for six months.

Features

- "Away from home" uses the public address; "At home" uses the home address.

Edge cases

- Leaving the page discards the link. Use "New link" to get another.

6.4 Log

The tail of the log file: scans, Plex syncs, backups, database upgrades, restores and every failure. It means diagnosing the server does not need a terminal.

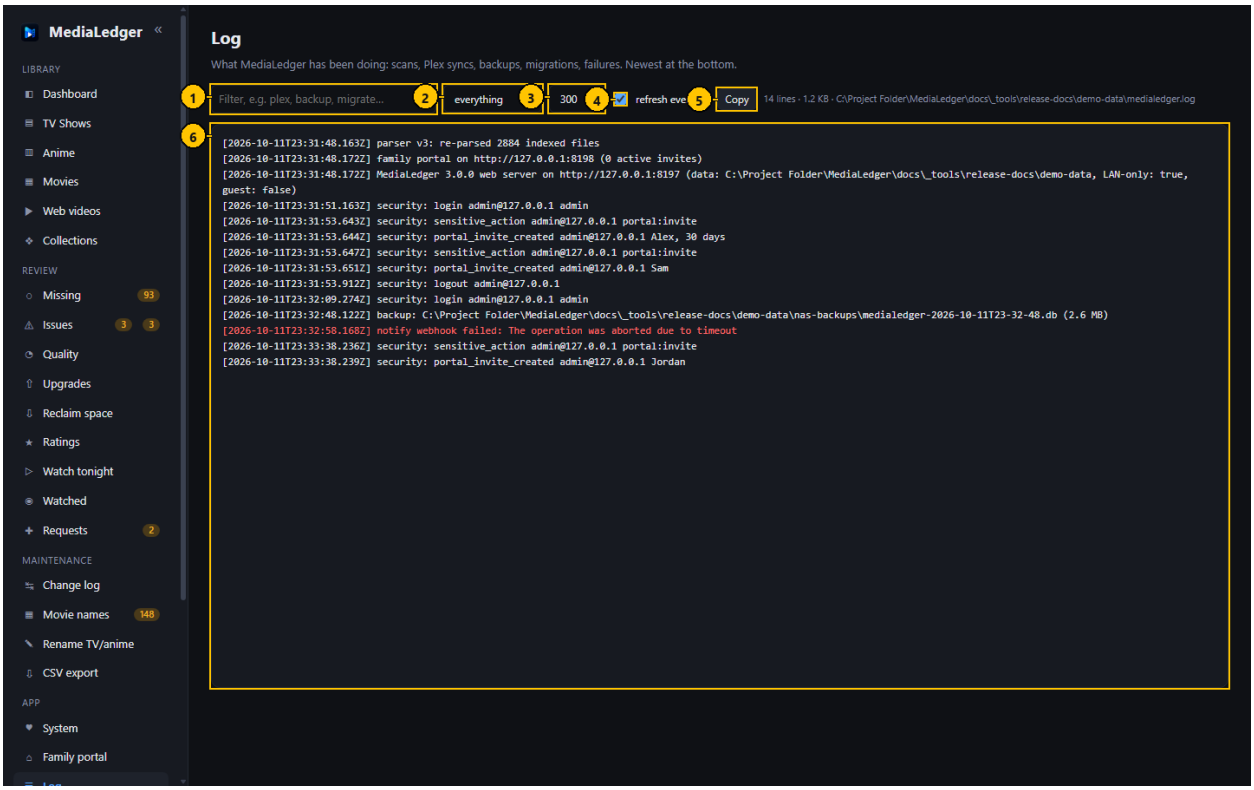


Figure 42. Log. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Filter	Search field	Keeps the lines that contain what you type.	–	empty	–
2	Level	Drop-down list	Everything, or problems only.	–	everything	–
3	Lines	Drop-down list	How many lines to show.	300, 1000, 2000	300	–
4	Refresh every 5 s	Check box	Keeps the view current.	–	on	–
5	Copy	Button	Copies the lines shown.	–	–	–
6	Log lines	Text	The lines, newest at the bottom.	–	–	–

Typical workflow

1. Type a word in the filter, for example plex or backup.

2. Switch to "problems only" to see failures.
3. Press Copy to take the lines elsewhere.

Features

- Refreshes every five seconds while the box is ticked.
- Failures are red, warnings amber.

Edge cases

- Only the last two megabytes of the file are read.
- Administrators only on the web server.

6.5 Security

Accounts, sessions and the protections of the web server. The desktop application shows this page only to explain that it applies to the server.

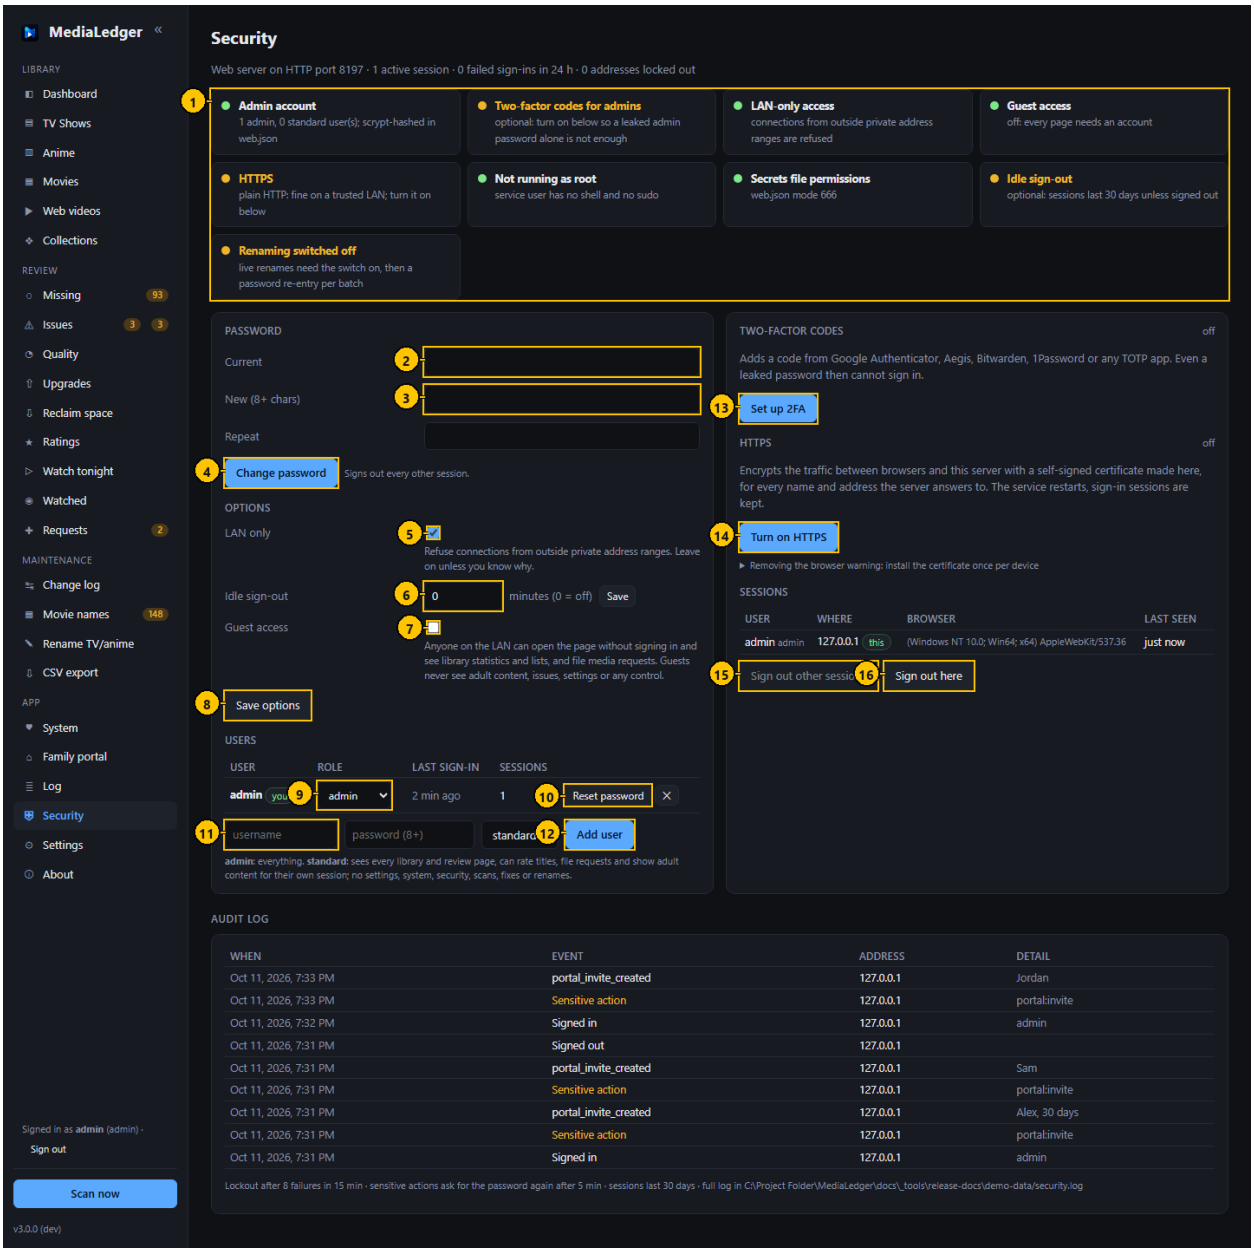


Figure 43. Security. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Checklist	Card	Each protection with a tick or a warning.	–	–	–
2	Current password	Password field	Your password now.	–	empty	–
3	New password	Password field	The password to change to.	At least 8 characters	empty	–
4	Change password	Button	Changes your password and signs out your other sessions.	–	–	–
5	LAN only	Check box	Refuses every address outside your network.	–	on	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Sign out when idle	Number field	Minutes without activity after which a session ends.	0 (never) or more	0	–
7	Guest access	Check box	Lets people look without signing in, read-only.	–	off	Guests can also file requests.
8	Save options	Button	Saves the three options above.	–	–	–
9	Role	Drop-down list	The role of that user.	admin, standard	–	–
10	Reset password	Button	Sets a new password for that user.	–	–	–
11	New user	Text field	The name of the account to add.	–	empty	–
12	Add user	Button	Creates the account.	–	–	–
13	Set up 2FA	Button	Starts two-factor setup.	–	–	–
14	Turn on HTTPS	Button	Creates a self-signed certificate and restarts on HTTPS.	–	–	Use "Turn HTTPS off" instead when a reverse proxy holds the certificate.
15	Sign out other sessions	Button	Ends every session but this one.	–	–	–
16	Sign out here	Button	Ends this session.	–	–	–

Typical workflow

1. Read the checklist at the top: each line is a protection and whether it is in place.
2. Change your password, add users, set their roles.
3. Switch on two-factor codes.
4. Decide whether guests may look without signing in.
5. Sign out other sessions if a device was lost.

Features

- Three roles: administrator (everything), standard (read, plus requests and ratings) and guest (read-only, no account).
- LAN only refuses every address outside your network.
- Sensitive actions ask for your password again when your last confirmation is more than five minutes old.
- Every sign-in, refusal and sensitive action is written to a security log, shown at the bottom.

Edge cases

- The last administrator cannot be deleted or demoted.
- Behind a reverse proxy the visitor's real address is read from the proxy, and only when the connection comes from this machine.

Messages and what they mean

Message	Meaning and what to do
`Password must be at least 8 characters`	Choose a longer password.
`Please re-enter your password for this action`	The action is sensitive and your last confirmation is too old.
`LAN only`	The request came from outside your network and was refused.

6.6 Two-factor setup

Adds a six-digit code from an authenticator application to the sign-in, so a leaked password alone is not enough.

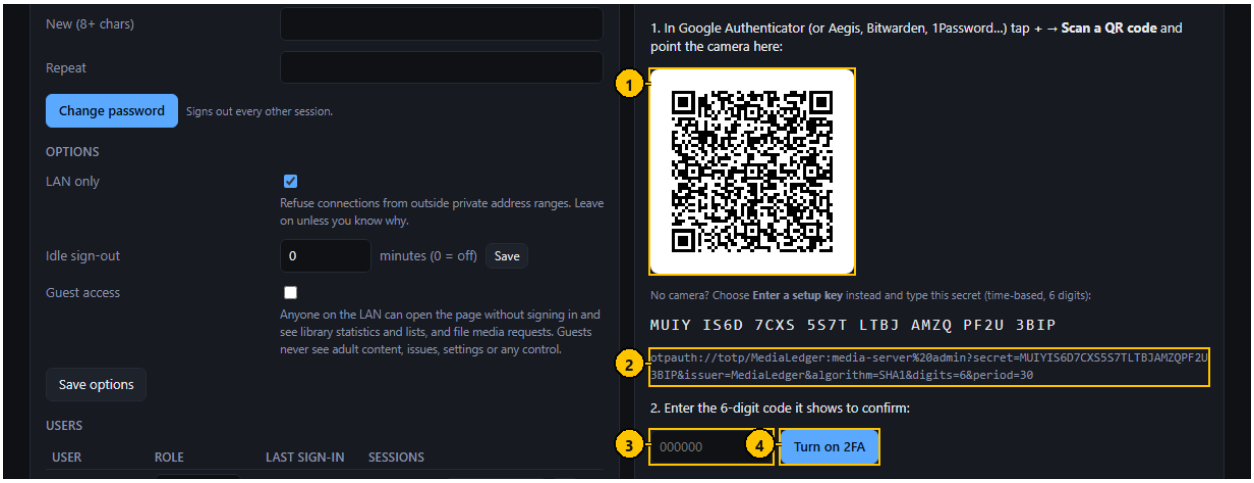


Figure 44. Two-factor setup. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	QR code	Image	The setup key as a code for the authenticator application.	–	–	–
2	Setup key	Text	The same key as text, for typing by hand.	–	–	–
3	Code	Text field	The six digits the application shows.	6 digits	empty	–
4	Turn on 2FA	Button	Confirms the code and switches two-factor codes on.	–	–	–

Typical workflow

1. In the authenticator application choose "Scan a QR code" and point the camera at the code.
2. Or type the key shown under the code.
3. Type the six digits the application shows and press "Turn on 2FA".

Features

- Works with Google Authenticator, Aegis, Bitwarden, 1Password and any application that follows the same standard.

Edge cases

- Setup is not finished until a code has been confirmed.
- Turning two-factor codes off asks for your password.

Messages and what they mean

Message	Meaning and what to do
`That code is not right`	The six digits did not match. Check the clock of the phone and try the next code.

6.7 About

Which version is running, where its data lives, and how to update.

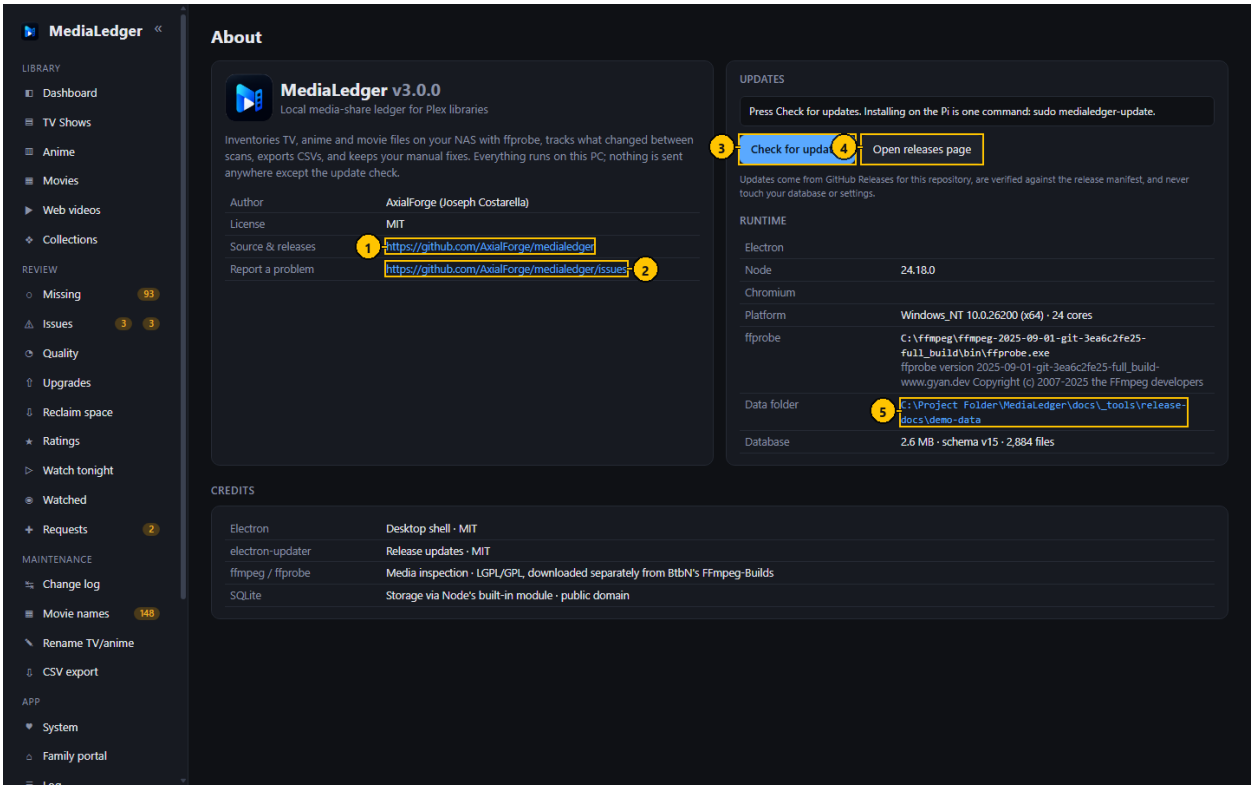


Figure 45. About. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Repository	Link	Opens the project on GitHub.	–	–	–
2	Report a problem	Link	Opens the issue list.	–	–	–
3	Check for updates	Button	Asks GitHub for the newest release.	–	–	–
4	Open releases page	Button	Opens the list of releases.	–	–	–
5	Data folder	Link	The folder that holds the database, the settings and the log.	–	–	Desktop: opens the folder.

Typical workflow

1. Press "Check for updates".
2. On the desktop, a newer version downloads by itself and is applied on the next restart.
3. On the web server the page names the command to run.

Features

- Lists the versions of the parts it is built on and the path of the database.

Edge cases

- The desktop application checks at launch and every six hours when automatic updates are on.

Messages and what they mean

Message	Meaning and what to do
`Could not reach GitHub`	No connection, or GitHub is limiting requests. Try later.

7. Settings

Everything on the Settings page, section by section. The page has a tab for each group of sections (Library, Episodes and quality, Automation, Connections, Renaming, Backup and data, Appearance), an **All** tab, and a **Find a setting** box; the pictures below each show a few sections with the rest hidden. Nothing on the page takes effect until **Save settings** at the bottom is pressed. The values are stored in `settings.json` in the data folder; section 10 lists every one.

7.1 Settings: Appearance and Library roots

The colour theme, and the folders MediaLedger scans. Nothing is scanned until a root is listed here and enabled.

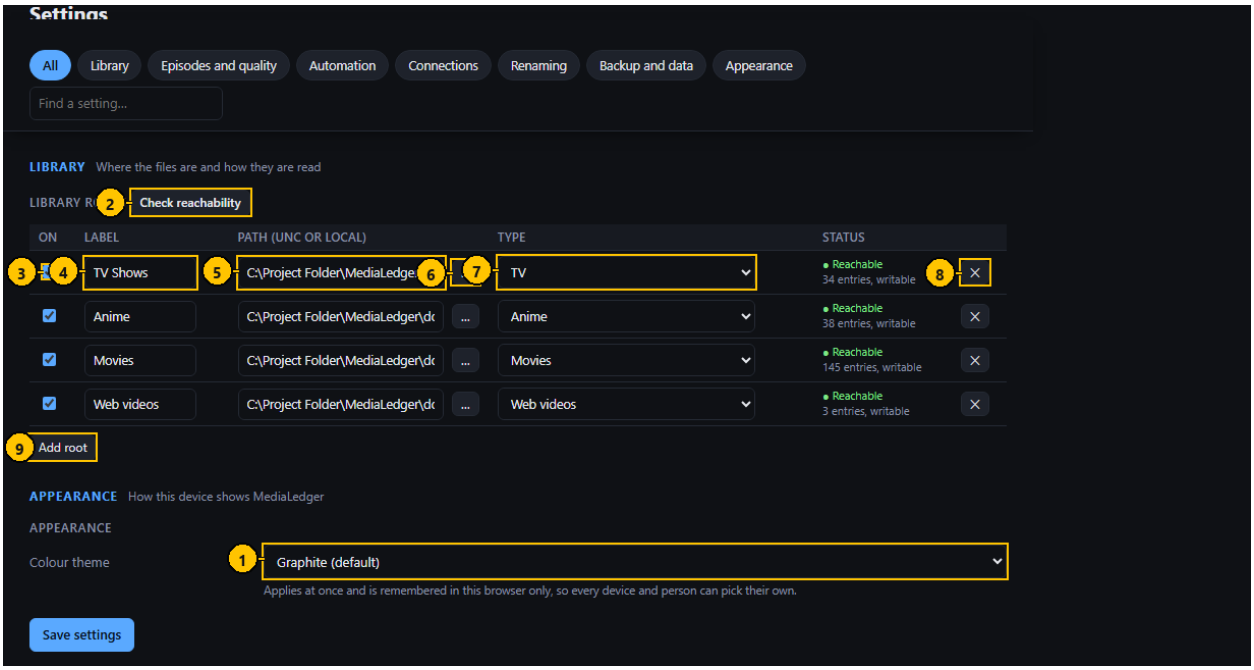


Figure 46. Settings: Appearance and Library roots. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Colour theme	Drop-down list	Changes the colours of the application.	Graphite, Midnight blue, Obsidian, Forest, Rose, Lavender, Gunmetal, Crimson	Graphite	Stored in the browser, per device.
2	Check reachability	Button	Tests every root now and shows the result beside it.	–	–	–
3	On	Check box	Whether this root is scanned.	–	on	–
4	Label	Text field	The name shown for the root.	Free text	–	–
5	Path	Text field	The folder to scan.	A network path or a local folder	–	Windows: \\server\share\folder. Raspberry Pi: /mnt/media/folder.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Browse	Button	Chooses the folder.	–	–	Desktop: the system dialog. Web server: the folder browser.
7	Type	Drop-down list	How the files in this root are read.	TV, Anime, Movies, Web videos, Adult	–	–
8	Remove root	Button	Removes the root from the list.	–	–	–
9	Add root	Button	Adds an empty row.	–	–	–

Typical workflow

1. Pick a theme; it applies at once.
2. For each library folder add a root: a label, the path, and the type.
3. Press "Check reachability" to confirm every root can be read.
4. Press "Save settings" at the bottom of the page.

Features

- Types: TV, Anime, Movies, Web videos, Adult.
- When a root cannot be reached the page says why: the file server does not answer, the share is not mounted, or the folder is missing.

Edge cases

- On the web server the path is typed or chosen with the folder browser, which lists folders only.
- On the Raspberry Pi an armed automount is nudged before a share is reported as not mounted.
- Removing a root does not delete its records until the next scan marks the files missing.

Messages and what they mean

Message	Meaning and what to do
`Share not mounted`	The file server answers but the share is not mounted. On the Raspberry Pi: sudo mount, or wait a minute for the watchdog.
`does not answer on port 445`	The file server is off or unreachable.

7.2 Settings: Network shares (Raspberry Pi server)

On the Raspberry Pi server the media lives on a file server, and the server has to be connected to it before a folder can be picked. This section lists the connected shares and connects new ones. The desktop application has no such section: Windows reaches a share by its path.

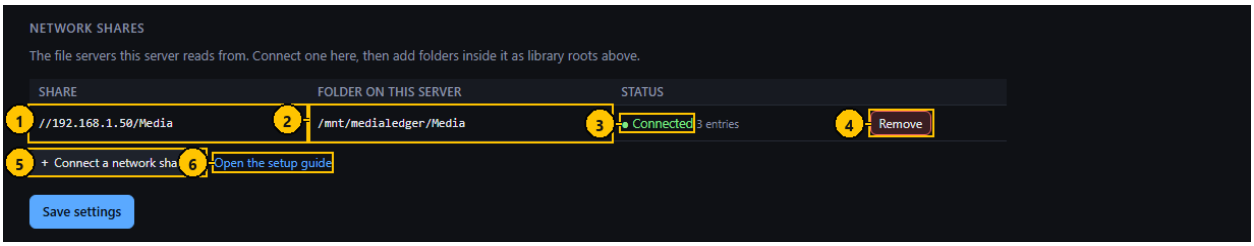


Figure 47. Settings: Network shares (Raspberry Pi server). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Share	Table	The address of the share on the file server.	–	–	–
2	Folder on this server	Table	Where the share appears on the Pi. Pick library folders inside it.	–	/mnt/medialedger/<share>	–
3	Status	Status	Connected with the number of entries, or Not connected.	–	–	Checked each time the page is opened.
4	Remove	Button	Disconnects the share and deletes its stored sign-in.	–	–	Asks first, then asks for your password.
5	Connect a network share	Button	Opens the dialog that signs in to a file server.	–	–	–
6	Open the setup guide	Link	Opens the welcome guide.	–	–	–

Typical workflow

1. Press Connect a network share.
2. Type the address of the file server, a user name and a password, and press Find shares.
3. Tick the shares that hold media and press Connect.
4. Each share appears here as a folder under /mnt/medialedger. Add folders inside it as library roots.

Features

- A share that drops (the file server restarted, the network blinked) is reconnected within a minute by a watchdog on the Pi.
- The sign-in is kept on the Pi in a file only root can read. It is never written to settings.json and never shown again.
- Connecting and removing ask for your password again, like every action that changes what the server can reach.

Edge cases

- A share made by the installer before version 2.4 is listed and marked "installer"; it is changed in /etc/fstab, not here.
- Removing a share changes nothing on the file server. Library roots inside it show as unreachable until it is connected again.
- On a server installed before 2.4 the button is greyed out until the installer has been run once more.

Messages and what they mean

Message	Meaning and what to do
`The server refused the username or password`	The file server answered but did not accept the sign-in. Check both and that the account may read the share.
`… did not answer as a file server. Check the address and that file sharing (SMB) is on`	Nothing answered at that address, or it does not share files.
`The share helper did not answer`	The helper that does the connecting is not running on the Pi. Run the command the message names.

Message	Meaning and what to do
`That share was not connected from here`	The share was made by the installer; remove it in /etc/fstab.

7.3 Connect a network share dialog

Signs in to a file server, lists the shares it offers, and connects the ones you tick. Reached from Settings, from the folder browser and from the welcome guide.

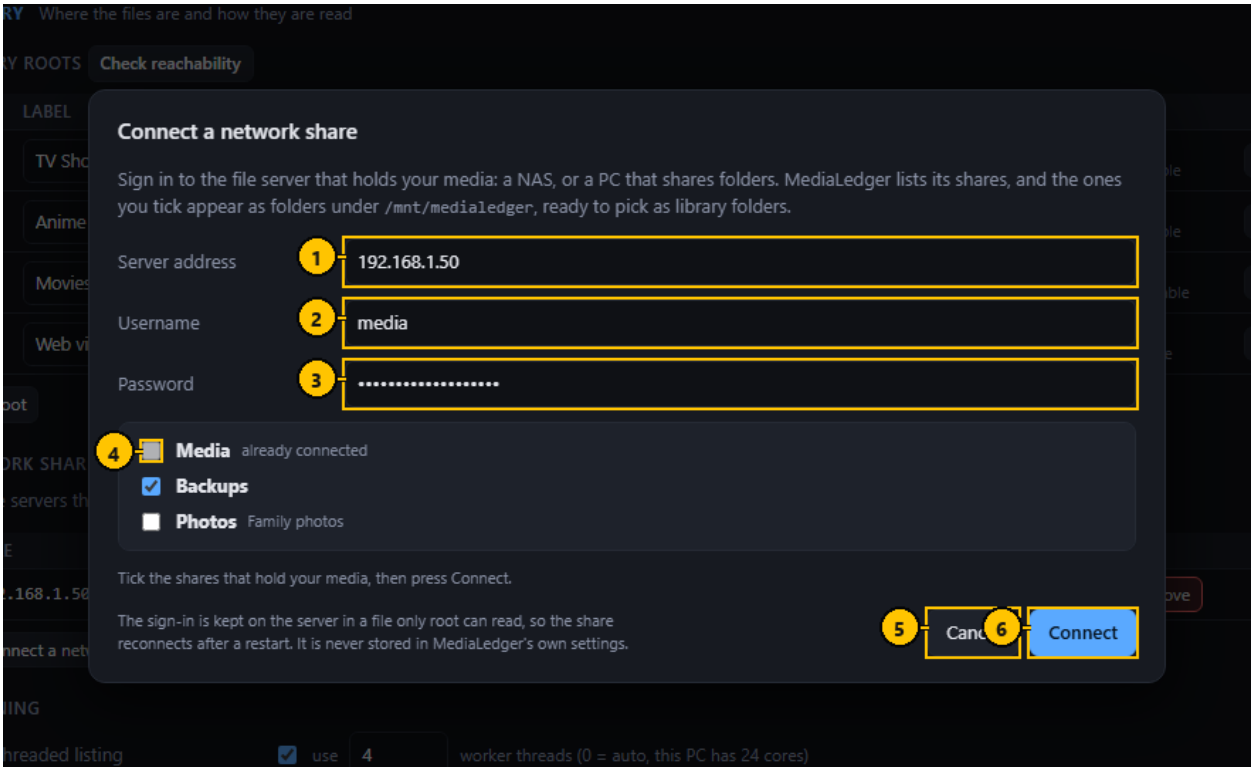


Figure 48. Connect a network share dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Server address	Text field	The file server to sign in to.	An IP address or a name. No slashes.	the server of the first connected share	–
2	Username	Text field	An account on the file server.	No % or = sign.	empty	–
3	Password	Password field	The password of that account.	One line.	empty	Stored on the Pi in a file only root can read.
4	Share	Checkbox	Tick each share to connect.	–	unticked	Greyed out when already connected.
5	Cancel	Button	Closes the dialog. Shares already connected stay connected.	–	–	–
6	Find shares, then Connect, then Done	Button	First lists the shares, then connects the ticked ones, then closes.	–	Find shares	The label changes with the step.

Typical workflow

1. Type the address of the file server: its IP address, or its name.

2. Type the user name and password of an account on that server that may read the media.
3. Press Find shares. The shares the server offers to that account are listed.
4. Tick the ones that hold media and press Connect.
5. Press Done. The folder browser opens inside the first share connected.

Features

- Shares that are already connected are listed greyed out.
- Hidden administrative shares (names ending in $) are left out.
- When the tool that lists shares is not installed on the server, a Share name field appears and the share is connected by name.

Edge cases

- The folder a share gets is its name with spaces turned into underscores.
- A share that fails to connect leaves nothing behind: no stored password and no entry that could slow the next start of the Pi.

Messages and what they mean

Message	Meaning and what to do
`The server refused the username or password`	Wrong sign-in, or the account may not use that share.
`The server has no share with that name`	Typed by hand and misspelt, or removed on the file server.
`The server did not answer. Check the address and that it is switched on`	Nothing answered at that address.
`The server address must be an IP address or a name, like 192.168.1.204 or nas.home`	The address field holds something else, for example a path with slashes.

7.4 Settings: Scanning, ffprobe, lookups and folder watch

How a scan walks the folders and measures the files, where ffprobe is, whether episode counts are looked up online, and whether folders are watched for changes.

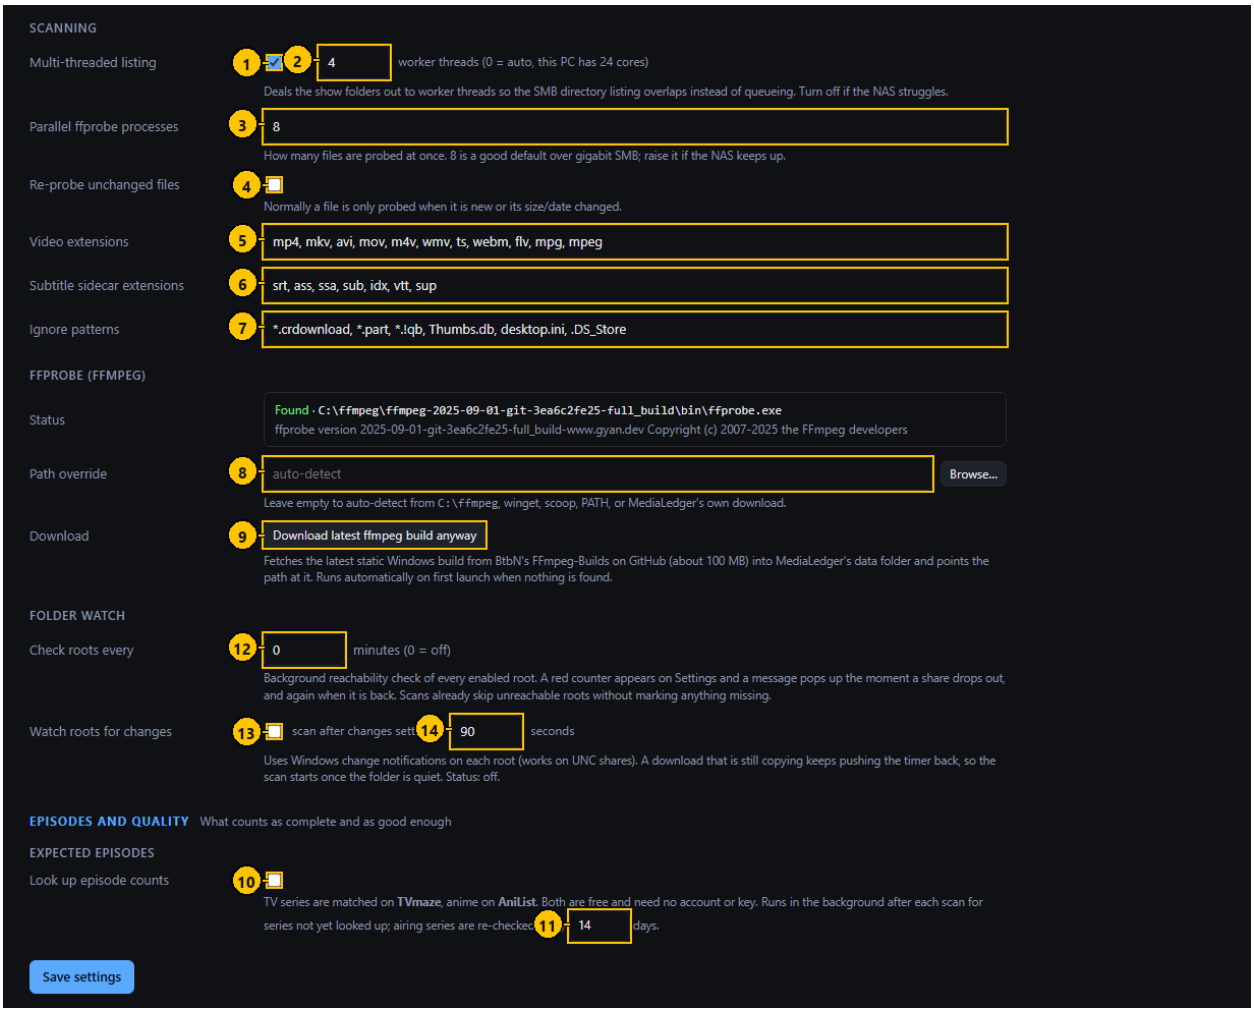


Figure 49. Settings: Scanning, ffprobe, lookups and folder watch. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Multi-threaded scan	Check box	Walks the roots with several threads.	–	on	–
2	Threads	Number field	How many threads walk the folders.	0 to 32; 0 chooses by itself	0	–
3	Parallel probes	Number field	How many ffprobe processes run at once.	1 or more	8	–
4	Probe unchanged files again	Check box	Measures every file again, even when its size and date are unchanged.	–	off	Makes a scan much slower.
5	Video extensions	Text field	Which file types count as video.	Comma separated	mp4, mkv, avi, mov, m4v, wmv, ts, webm, flv, mpg, mpeg	–
6	Subtitle extensions	Text field	Which file types count as subtitles beside a video.	Comma separated	srt, ass, ssa, sub, idx, vtt, sup	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
7	Ignore patterns	Text field	Files to skip.	Comma separated, * as wildcard	*.crdownload, *.part, *.!qb, Thumbs.db, desktop.ini, .DS_Store	–
8	ffprobe path	Text field	Where ffprobe is.	A file path	empty (found automatically)	–
9	Download ffmpeg	Button	Downloads a current ffmpeg build, which includes ffprobe.	–	–	Desktop only.
10	Look up expected episodes	Check box	Asks TVmaze and AniList how many episodes each series has.	–	on	–
11	Check running series again after	Number field	Days before a series that is still airing is looked up again.	1 or more	14	–
12	Check the roots every	Number field	Minutes between reachability checks.	0 (off) or more	5	–
13	Watch the folders	Check box	Starts a scan when files change.	–	off	–
14	Wait for changes to settle	Number field	Seconds of quiet before that scan starts.	–	90	–

Typical workflow

1. Leave the defaults unless scans are slow or something is missed.
2. Press "Save settings".

Features

- A scan walks the roots with several threads, then probes new and changed files with ffprobe.
- Episode lookups use TVmaze and AniList; both are free and need no account.

Edge cases

- Probing is limited by the network share more than by the processor; raising the number of parallel probes beyond 8 rarely helps.
- Folder watch does not work on every network share; the daily scan is the safety net.

Messages and what they mean

Message	Meaning and what to do
`ffprobe not found`	Press the download button, or point the path at an existing ffprobe.

7.5 Settings: Renaming, adult content, quality thresholds and CSV export

The switches for the rename tools, how adult content is treated, the bitrate below which a file counts as low quality, and where CSV files go.

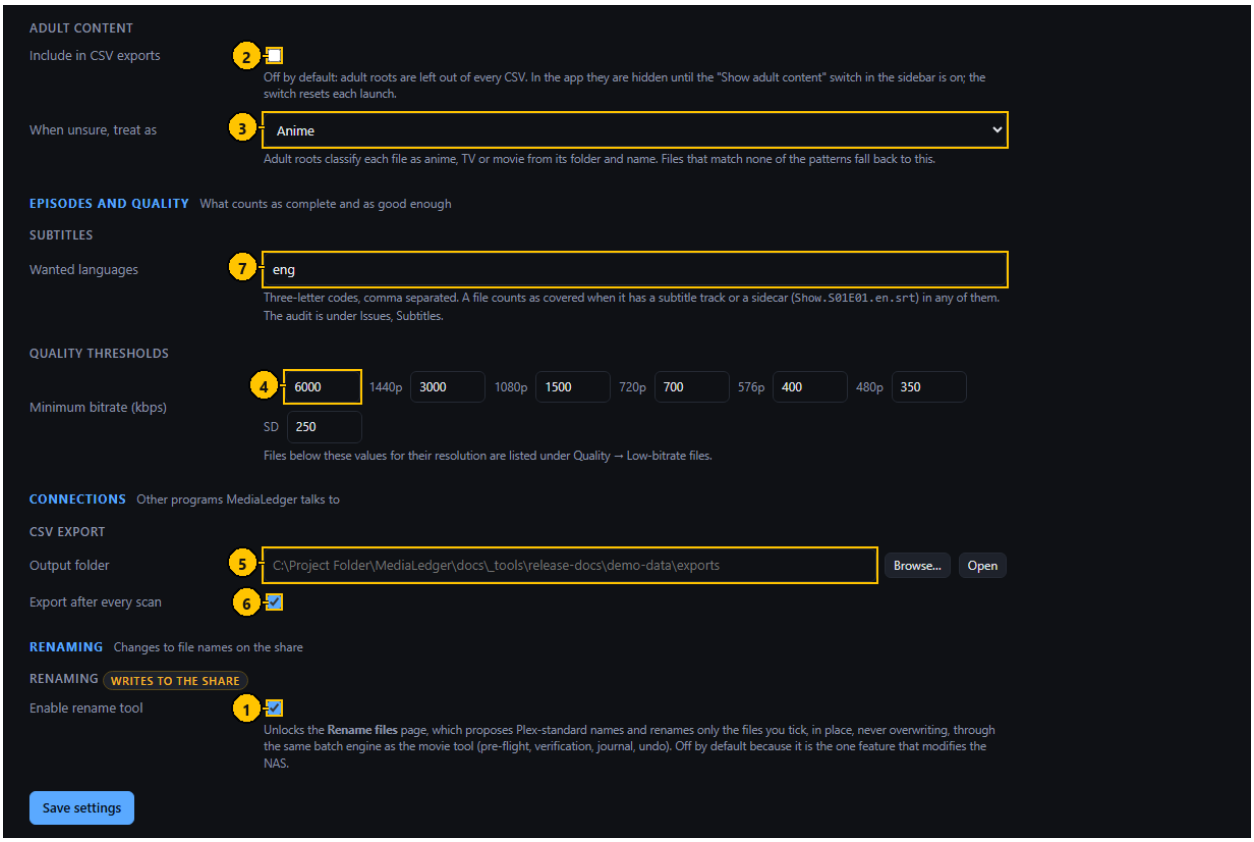


Figure 50. Settings: Renaming, adult content, quality thresholds and CSV export. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Renaming	Check box	Enables the Rename TV / anime page.	–	off	Marked "writes to the share".
2	Adult titles in CSV files	Check box	Includes adult titles in exports.	–	off	–
3	Read adult files as	Drop-down list	Whether files in an Adult root are read as anime or as TV.	Anime, TV	Anime	–
4	Minimum bitrate	Number fields	Below this bitrate a file of that resolution counts as low quality.	Kilobits per second, per resolution	4K 6000, 1440p 3000, 1080p 1500, 720p 700, 576p 400, 480p 350, SD 250	Feeds the Quality page and the Upgrades ranking.
5	CSV folder	Text field	Where exports are written.	A folder	empty (the exports folder beside the database)	–
6	Export after each scan	Check box	Writes the CSV files whenever a scan finishes.	–	on	–
7	Wanted subtitle languages	Text field	The languages a file should have subtitles in; the audit under Issues, Subtitles lists files without one.	Three-letter codes, comma separated.	eng	–

Typical workflow

1. Switch renaming on only when you intend to use the rename pages.
2. Adjust the thresholds to your own idea of acceptable quality.
3. Press "Save settings".

Edge cases

- Renaming writes to your share. It is off until you switch it on.

7.6 Settings: Schedules

Every job MediaLedger runs by itself, in one table, with when it last ran and when it runs next.

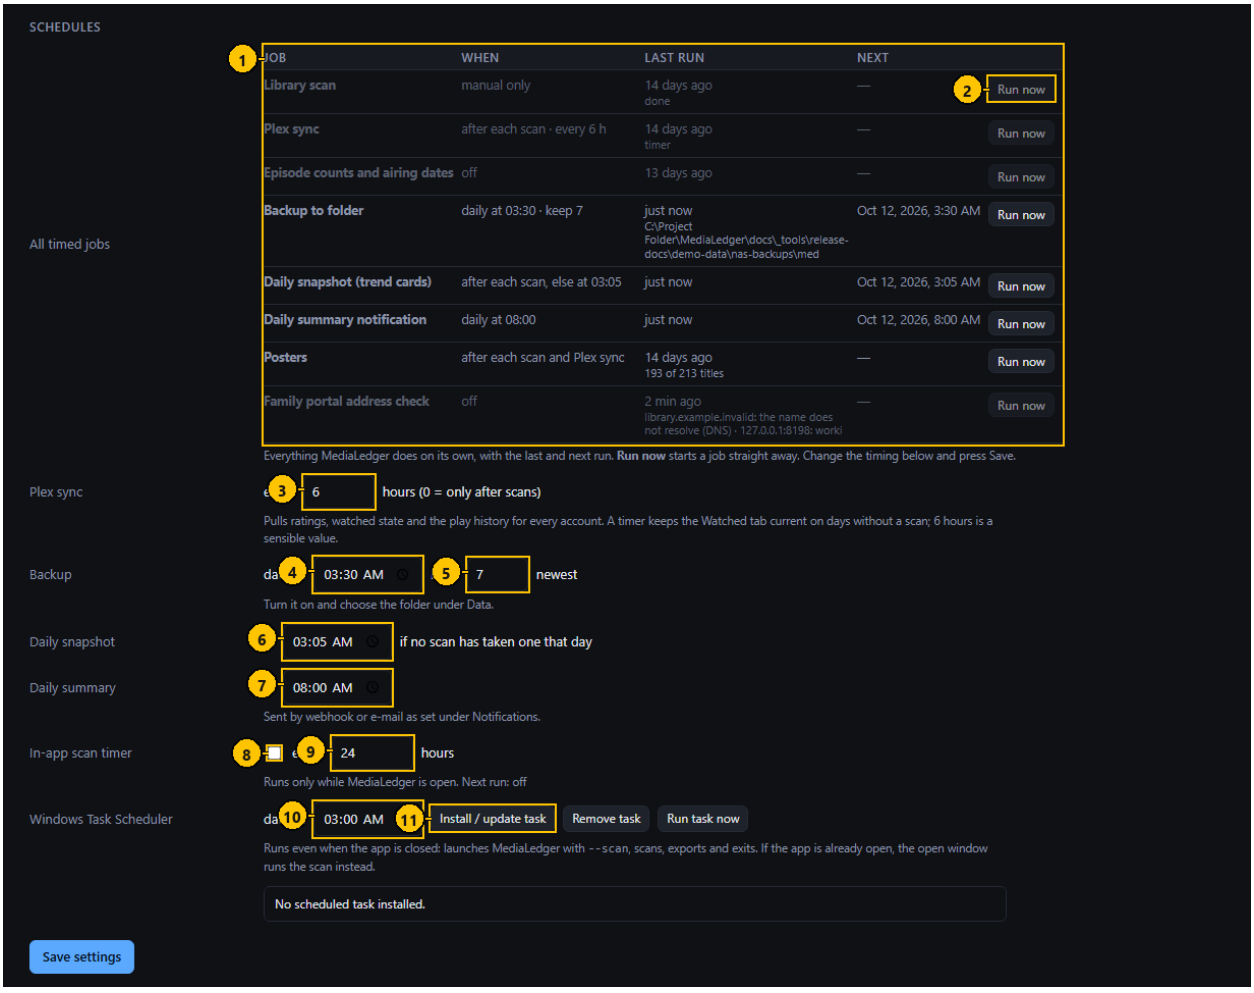


Figure 51. Settings: Schedules. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Jobs table	Table	Each job, when it runs, the last run and its result, and the next run.	–	–	–
2	Run now	Button	Starts that job.	–	–	–
3	Plex sync every	Number field	Hours between syncs that do not wait for a scan.	0 (only after scans) or more	6	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
4	Backup at	Time field	When the daily backup runs.	Time of day	03:30	–
5	Keep	Number field	How many backup sets to keep.	1 to 60	7	–
6	Daily snapshot at	Time field	When the snapshot is taken if no scan has taken one that day.	Time of day	03:05	–
7	Daily summary at	Time field	When the summary notification goes out.	Time of day	08:00	–
8	In-app scan timer	Check box	Scans on a timer while the application is open.	–	off	–
9	Every	Number field	Hours between those scans.	0.25 or more	24	–
10	Windows scheduled task at	Time field	When the task runs each day.	Time of day	03:00	Desktop only.
11	Install or update task	Button	Creates the scheduled task.	–	–	Desktop only.

Typical workflow

1. Read the table: a red "overdue" badge marks a job that has not run when it should have.
2. Press "Run now" to start a job at once.
3. Change the timing below and press "Save settings".

Features

- Jobs: library scan, Plex sync, episode counts and airing dates, backup, daily snapshot, daily summary, posters, and on the web server the family portal address check.
- A job is overdue when it has not run for twice its interval, 48 hours for the daily ones, or when the last backup failed.

Edge cases

- The in-app scan timer runs only while the application is open; the Windows scheduled task runs even when it is closed.
- On the Raspberry Pi the application is always running, so the in-app timer is the one to use.

7.7 Settings: Data, backups and posters

Where the database is, how it is backed up and restored, and where posters are kept.

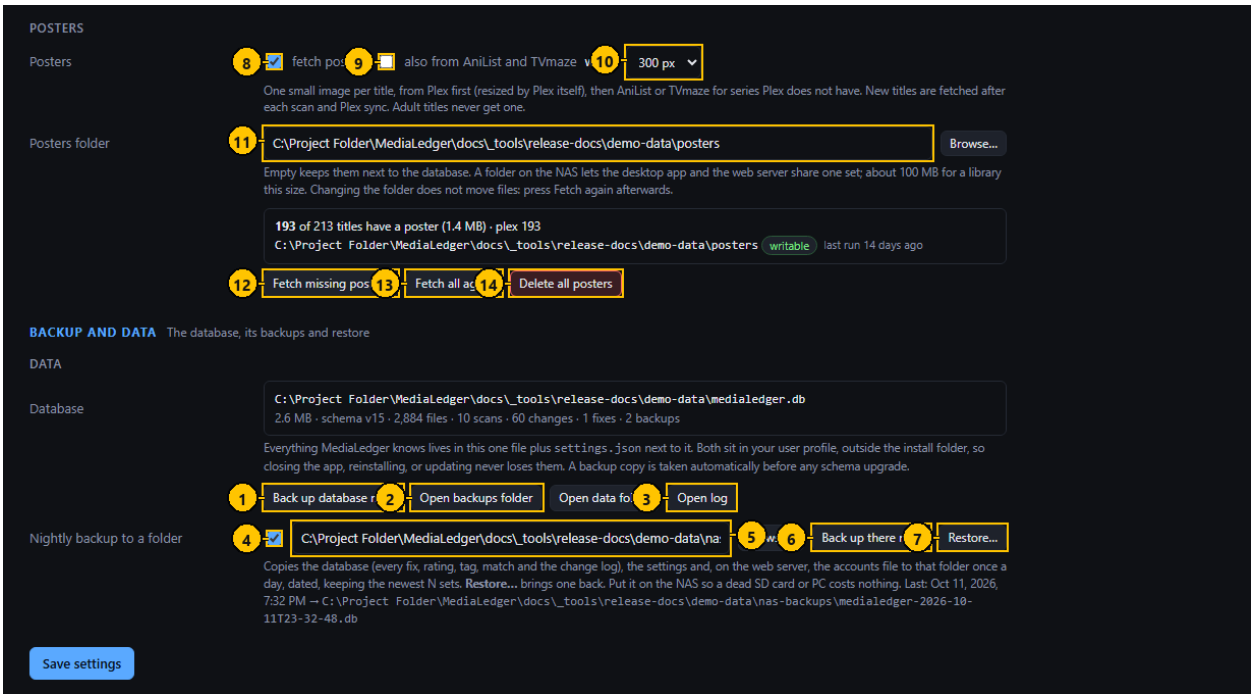


Figure 52. Settings: Data, backups and posters. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Back up database now	Button	Copies the database into the backups folder beside it.	–	–	–
2	Open backups folder	Button	Opens that folder.	–	–	Desktop only.
3	Open log	Button	Opens the log file.	–	–	Desktop only. The Log page works everywhere.
4	Daily backup to a folder	Check box	Copies a backup set to the folder once a day.	–	off	–
5	Backup folder	Text field	Where the sets go.	A folder	empty	–
6	Back up there now	Button	Writes a set at once, which also tests the folder.	–	–	–
7	Restore	Button	Opens the Restore dialog.	–	–	–
8	Fetch posters	Check box	Fetches posters after each scan and Plex sync.	–	on	–
9	Also from AniList and TVmaze	Check box	Uses the online services for series Plex does not have.	–	on	–
10	Width	Drop-down list	The width posters are fetched at.	200, 300 or 400 pixels	300	–
11	Posters folder	Text field	Where posters are kept.	A folder	empty (the posters folder beside the database)	–
12	Fetch missing posters	Button	Fetches posters for titles that have none.	–	–	–
13	Fetch all again	Button	Fetches every poster again.	–	–	Asks first.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
14	Delete all posters	Button	Deletes the poster files.	–	–	Asks first. They can be fetched again.

Typical workflow

1. Tick the backup box, set the folder (the NAS is the right place) and press "Back up there now" to test it.
2. Set the posters folder and press "Fetch missing posters".
3. Press "Save settings".

Features

- A backup is a set with one date stamp: the database, the settings and, on the web server, the accounts and portal files.
- A backup is also taken automatically before every database upgrade.
- Posters come from Plex first, then AniList and TVmaze; adult titles never get one.

Edge cases

- The accounts file holds password fingerprints and two-factor keys; keep the backup folder private.
- Changing the posters folder does not move files; fetch again afterwards.
- A title with no art anywhere is asked for again after two weeks.

Messages and what they mean

Message	Meaning and what to do
`No backup folder set`	Type a folder before backing up.
`The posters folder is not writable`	The folder does not exist or the application may not write there. On the Raspberry Pi, mount the share for the medialedger user.
`Copied backup is empty`	The copy failed; the folder may be full or read-only.

7.8 Restore from a backup dialog

Brings the database back from a backup set.

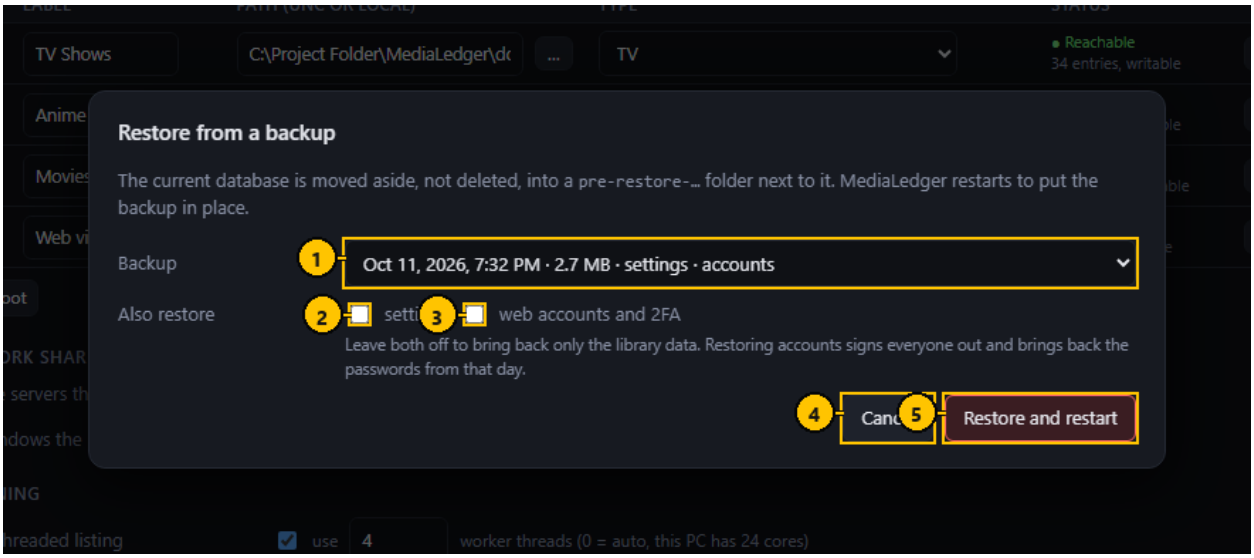


Figure 53. Restore from a backup dialog. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Backup	Drop-down list	The set to restore: its date, size and what it contains.	–	The newest	–
2	Also restore settings	Check box	Brings the settings back too.	–	off	–
3	Also restore web accounts and 2FA	Check box	Brings the accounts, two-factor keys and portal invites back too.	–	off	–
4	Cancel	Button	Closes without restoring.	–	–	–
5	Restore and restart	Button	Checks the backup, restarts, and puts it in place.	–	–	Asks for your password again on the web server.

Typical workflow

1. Pick the set by its date.
2. Tick whether the settings and the accounts should come back as well.
3. Press "Restore and restart" and confirm.

Features

- The backup is opened read-only and checked before anything happens.
- The files it replaces are moved into a folder named pre-restore with the date, beside the database. Nothing is deleted.

Edge cases

- A backup from a newer version is refused; update first.
- Restoring accounts signs everyone out and brings back the passwords of that day.

Messages and what they mean

Message	Meaning and what to do
`The backup failed its integrity check`	The file is damaged. Choose another set.
`The backup is schema vN; this build understands up to vM`	The backup is from a newer version.
`A scan is running; restore when it has finished`	Wait for the scan.

7.9 Folder browser dialog (web server)

Chooses a folder on the server when the application runs in a browser, where the system folder dialog is not available.

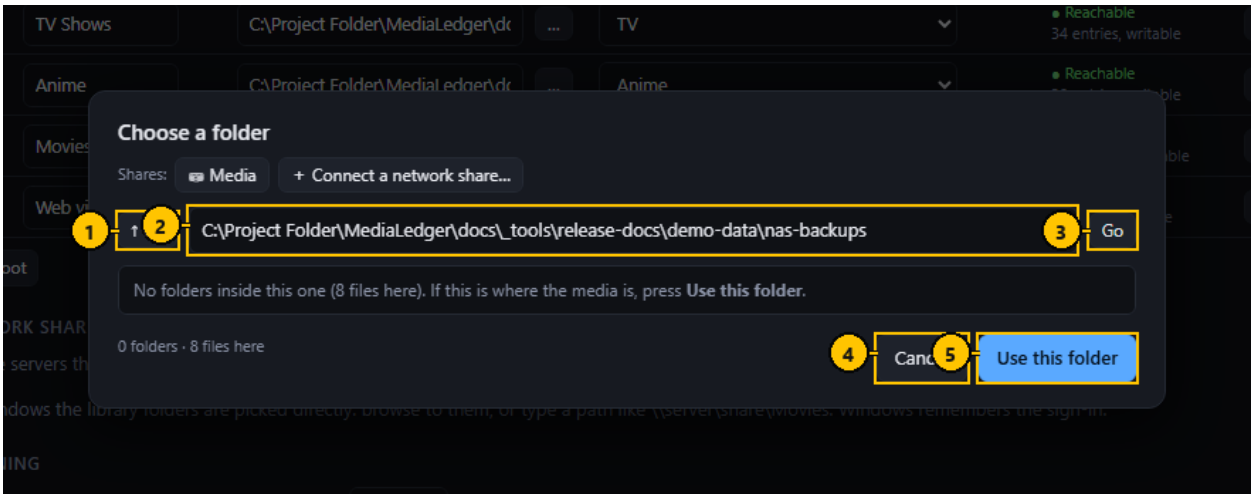


Figure 54. Folder browser dialog (web server). The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Up	Button	Goes to the folder above.	–	–	–
2	Path	Text field	The folder being shown.	–	–	Enter does the same as Go.
3	Go	Button	Opens the typed path.	–	–	–
4	Cancel	Button	Closes without choosing.	–	–	–
5	Use this folder	Button	Puts the path into the field you came from.	–	–	–

Typical workflow

1. Type a path and press Go, or click a folder in the list.
2. Press "Use this folder".

Edge cases

- Folders only; files and hidden folders are not listed.

7.10 Settings: Updates and notifications

Whether the desktop application updates itself, and how MediaLedger tells you that something happened.

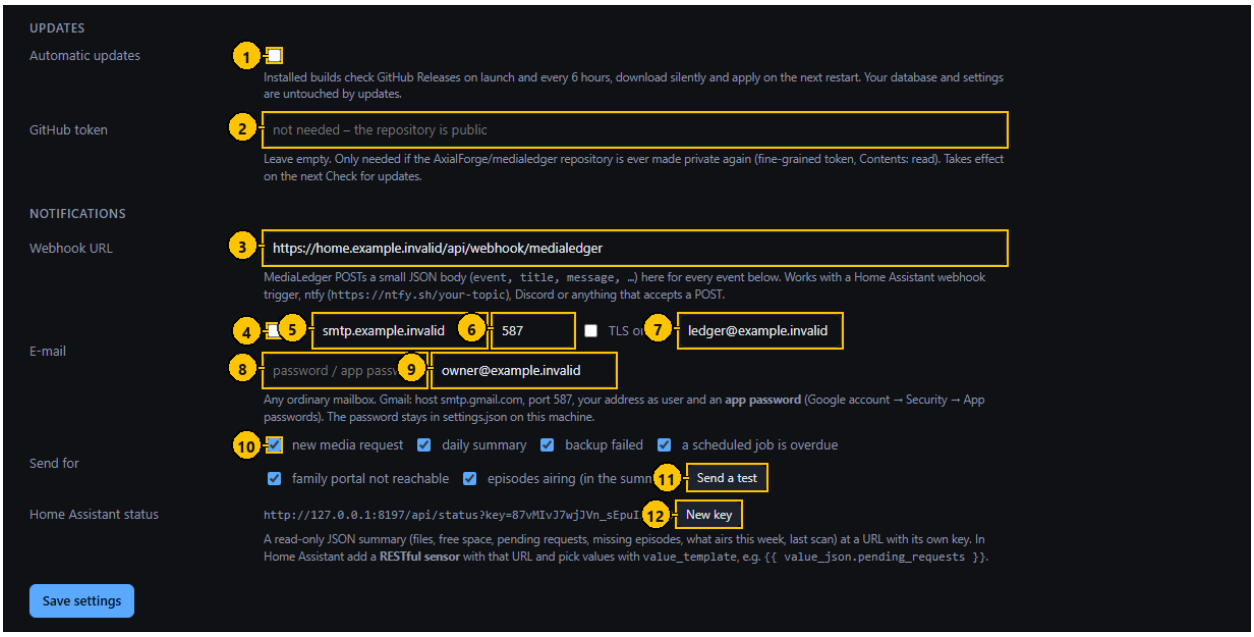


Figure 55. Settings: Updates and notifications. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Automatic updates	Check box	Checks GitHub at launch and every six hours.	–	on	Desktop only.
2	GitHub token	Password field	Only needed if the repository is made private.	–	empty	Leave empty.
3	Webhook address	Text field	Where event messages are sent.	An https or http address	empty	–
4	E-mail on	Check box	Sends events by e-mail.	–	off	–
5	Mail server	Text field	The outgoing mail server.	–	empty	–
6	Port	Number field	The port of the mail server.	–	587	–
7	Account	Text field	The account to send from.	–	empty	–
8	Password	Password field	The password of that account.	–	empty	–
9	Recipient	Text field	Who receives the e-mail.	–	empty	–
10	Events	Check boxes	Which events are sent: new request, daily summary, backup failed, scheduled job overdue, family portal not reachable, episodes airing.	–	All ticked	–
11	Send a test	Button	Sends a test message through everything that is set up.	–	–	–
12	New key	Button	Replaces the key of the status address.	–	–	The old address stops working.

Typical workflow

1. For a webhook, paste the address and press "Send a test".
2. For e-mail, fill in the server, the account and the recipient, then test.
3. Tick the events you want.
4. Press "Save settings".

Features

- A webhook receives a small JSON message per event; Home Assistant, ntfy and Discord all accept it.
- The status address gives a read-only summary for Home Assistant, protected by its own key.

Edge cases

- For Gmail use an application password, not the account password.
- The update switch applies to the desktop application; the web server is updated with a command.

Messages and what they mean

Message	Meaning and what to do
`No webhook or e-mail configured`	Set one before testing.

7.11 Settings: Plex

Connects MediaLedger to your Plex Media Server on the local network, to read titles, ratings, watched state and the play history.

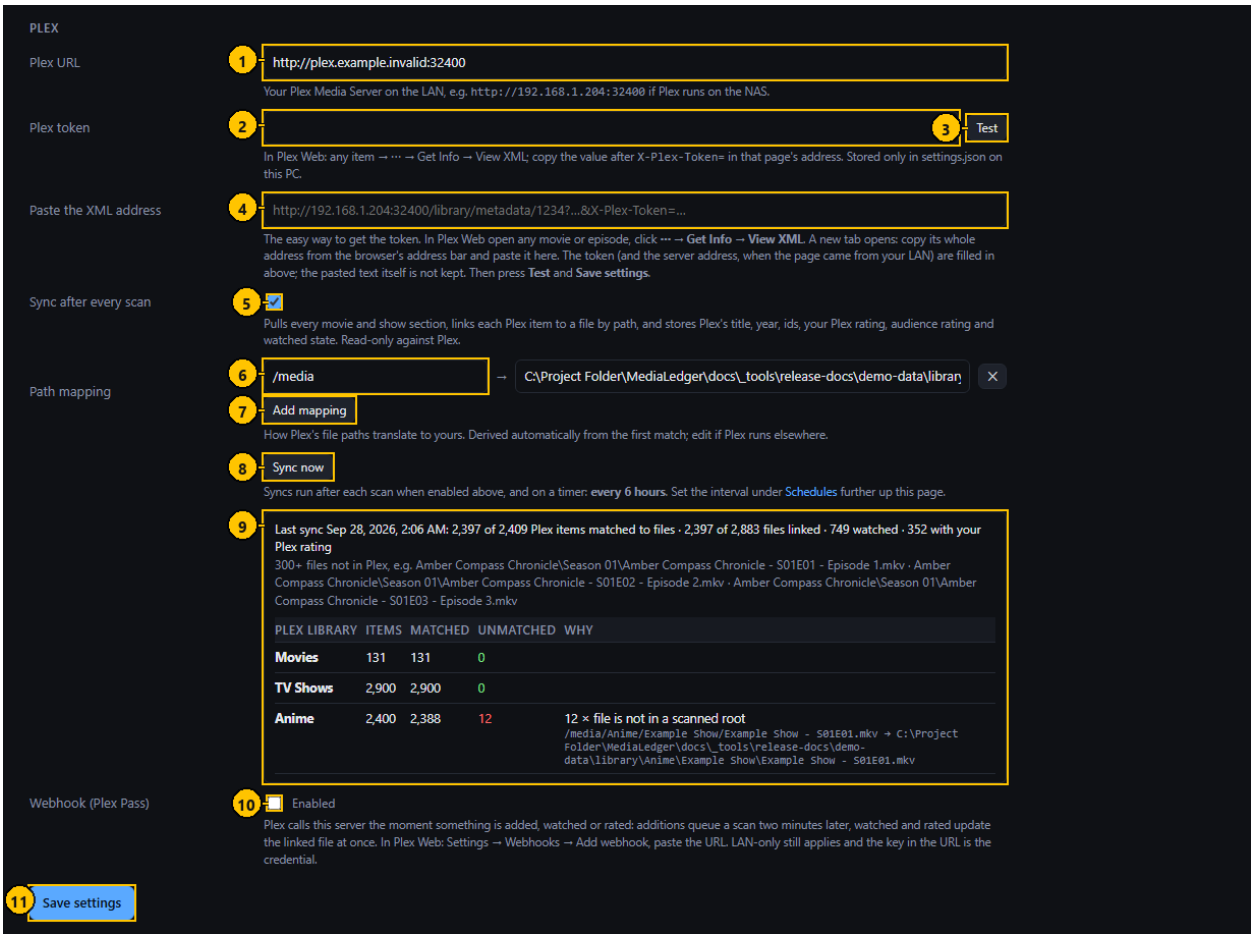


Figure 56. Settings: Plex. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Plex address	Text field	The address of the Plex server.	http://address:32400	http://192.168.1.204:32400	–
2	Plex token	Password field	The token that lets MediaLedger read from Plex.	–	empty	Shown as dots; never sent anywhere but your Plex server.
3	Test	Button	Connects and lists the libraries found.	–	–	–
4	Paste the XML address	Text field	Takes the token out of an address copied from Plex.	–	empty	In Plex: an item, the three dots, Get Info, View XML, then copy the address.
5	Sync after each scan	Check box	Runs a sync whenever a scan finishes.	–	off	–
6	Path mapping	Text fields	How a path as Plex reports it translates to the path MediaLedger knows.	–	Worked out on the first sync	–
7	Add mapping	Button	Adds a mapping row.	–	–	–
8	Sync now	Button	Starts a sync.	–	–	–
9	Last sync	Status	The result of the last sync and the table per library.	–	–	–
10	Webhook enabled	Check box	Accepts reports from Plex.	–	off	Web server only.
11	Save settings	Button	Saves everything on the Settings page.	–	–	Nothing on this page is saved until it is pressed.

Typical workflow

1. Type the address of the Plex server.
2. Paste the XML address from Plex into the box below; the token is taken from it.
3. Press Test.
4. Tick "Sync after each scan" and press "Sync now".
5. Read the table under the last sync for anything unmatched.

Features

- Files are matched by their path; the path mapping translates how Plex sees a file into how MediaLedger sees it, and is worked out by itself on the first sync.
- The table breaks the sync down per Plex library, with the reason for anything unmatched.
- The webhook lets Plex report plays and ratings the moment they happen (Plex Pass).

Edge cases

- "file is not in a scanned root" means Plex has a library MediaLedger does not scan; add the root or ignore the row.
- "no path mapping covers this folder" means that library lives under a path no mapping translates; add a mapping.

Messages and what they mean

Message	Meaning and what to do
`Plex rejected the token (401)`	The token is wrong or has been revoked. Take a new one.
`Could not reach Plex`	The address is wrong or the server is off.

8. The family portal

A separate site for the people you invite. It is set up from the Family portal page (section 6) and reached at its own address. These are the pages a visitor sees, shown at the size of a phone, followed by the three pages of the owner's own sign-in at `/admin`.

8.1 Family portal: Library

The family portal is a separate small site for invited people. Library lists what is in the three libraries.

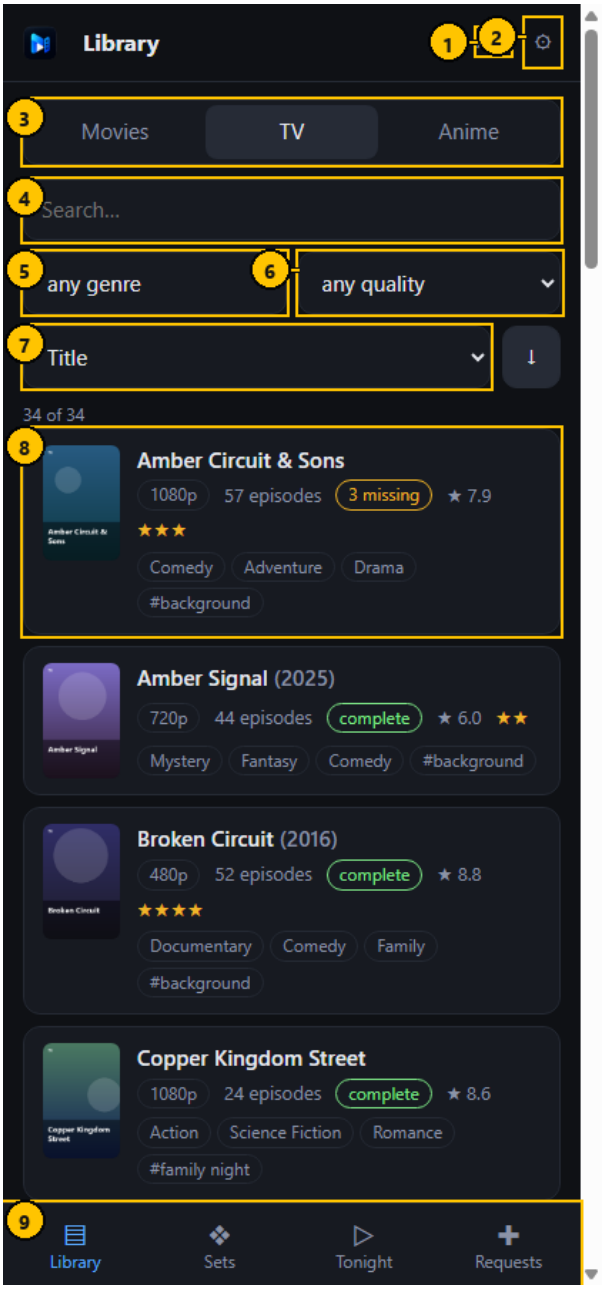


Figure 57. Family portal: Library. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Your name	Label	The name on the invite.	–	–	–
2	Settings	Button	Opens the theme and sign-out page.	–	–	–
3	Library	Tabs	Movies, TV or Anime.	–	Movies	Remembered on this device.
4	Search	Search field	Keeps the titles that contain what you type.	–	empty	Also matches tags.
5	Genre	Drop-down list	Keeps the titles with that genre.	–	any genre	–
6	Quality	Drop-down list	Keeps the titles whose best copy has that resolution.	4K, 1080p, 720p	any quality	–
7	Sort	Drop-down list	Alphabetical, best rated, or newest first.	–	A to Z	–
8	Title	Row	Poster, name, quality, length or episode count, rating, genres.	–	–	Tap to open.
9	Tabs	Navigation	Library, Tonight and Requests, as far as the invite allows.	–	–	–

Typical workflow

1. Tap Movies, TV or Anime.
2. Type in the search box, or choose a genre, a quality or a sort order.
3. Tap a title to open it.

Features

- Posters throughout.
- Series show whether they are complete or how many episodes are missing.

Edge cases

- Adult titles are never listed.
- Without an invite on this device the page only says that an invite is needed.

Messages and what they mean

Message	Meaning and what to do
`Invite needed`	Open the invite link on this device.
`Too many requests; wait a minute`	The portal limits how fast one device may ask.

8.2 Family portal: a series

What is on hand of one title.

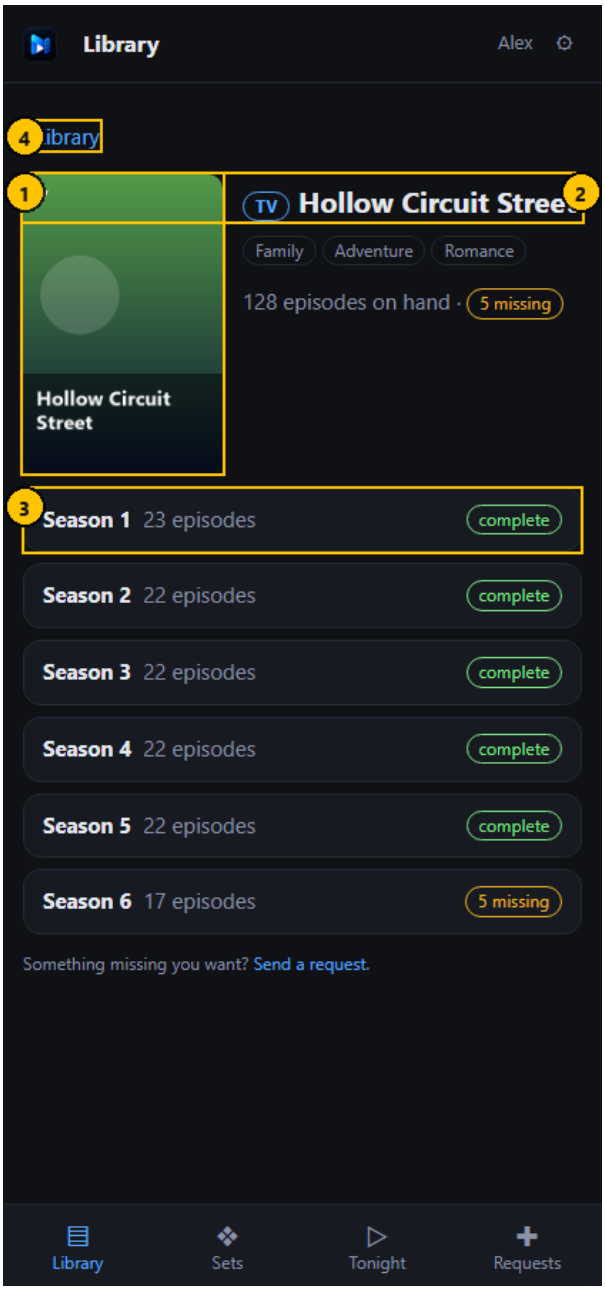


Figure 58. Family portal: a series. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Poster	Image	The poster of the title.	–	–	–
2	Title	Heading	The name and its library.	–	–	–
3	Season	Expandable row	A season with its episode count and whether it is complete.	–	Closed	Tap to open.
4	Back	Link	Returns to the Library.	–	–	–

Typical workflow

1. Tap a season to open it.

2. Red lines are episodes that are not in the library.

Features

- A long run of missing episodes is shown as ranges, for example 1 to 60.

Messages and what they mean

Message	Meaning and what to do
`Not in the library`	The title was removed since the list was loaded.

8.3 Family portal: Tonight

Helps a family member choose something to watch.

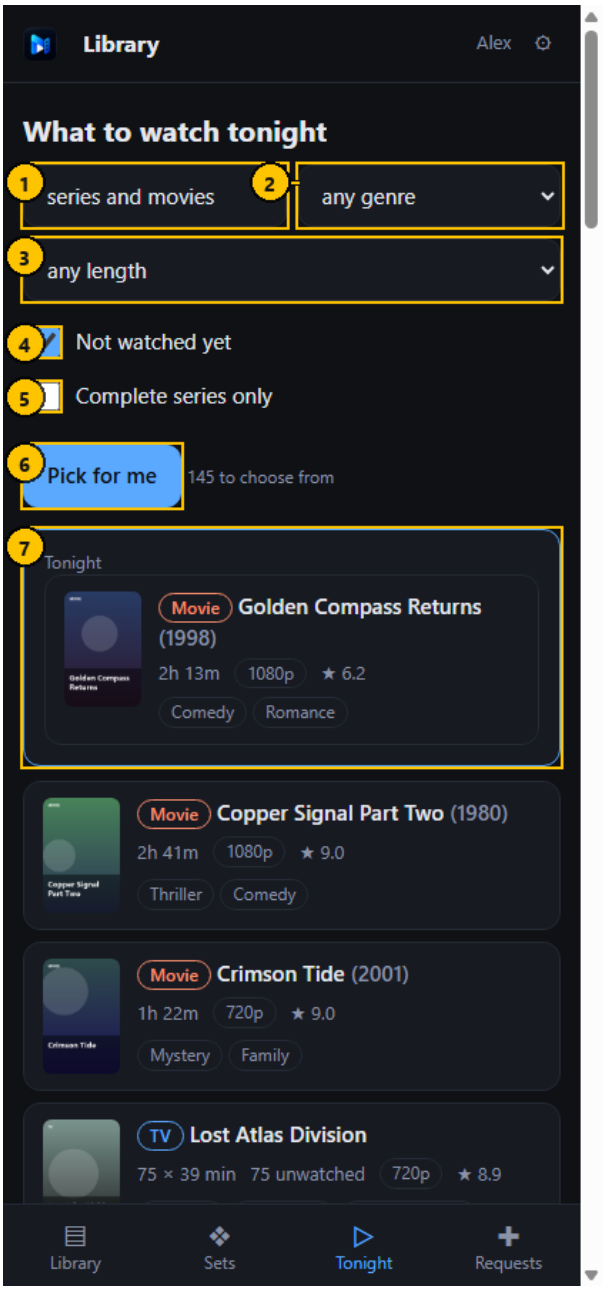


Figure 59. Family portal: Tonight. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Kind	Drop-down list	Series, movies or both.	–	series and movies	–
2	Genre	Drop-down list	Keeps the titles with that genre.	–	any genre	–
3	Length	Drop-down list	The longest length you have time for.	30 minutes to 2 hours 10 minutes	any length	–
4	Not watched yet	Check box	Keeps the titles with something left to watch.	–	on	–
5	Complete series only	Check box	Keeps the series with no missing episodes.	–	off	–
6	Pick for me	Button	Chooses one at random.	–	–	–
7	Tonight	Card	The title that was picked.	–	–	–

Typical workflow

1. Choose the kind, a genre and how long you have.
2. Tap "Pick for me".

Edge cases

- "Not watched yet" follows the Plex account of the household, not the visitor's.

8.4 Family portal: Requests

Lets a family member ask for a title and follow what became of it.

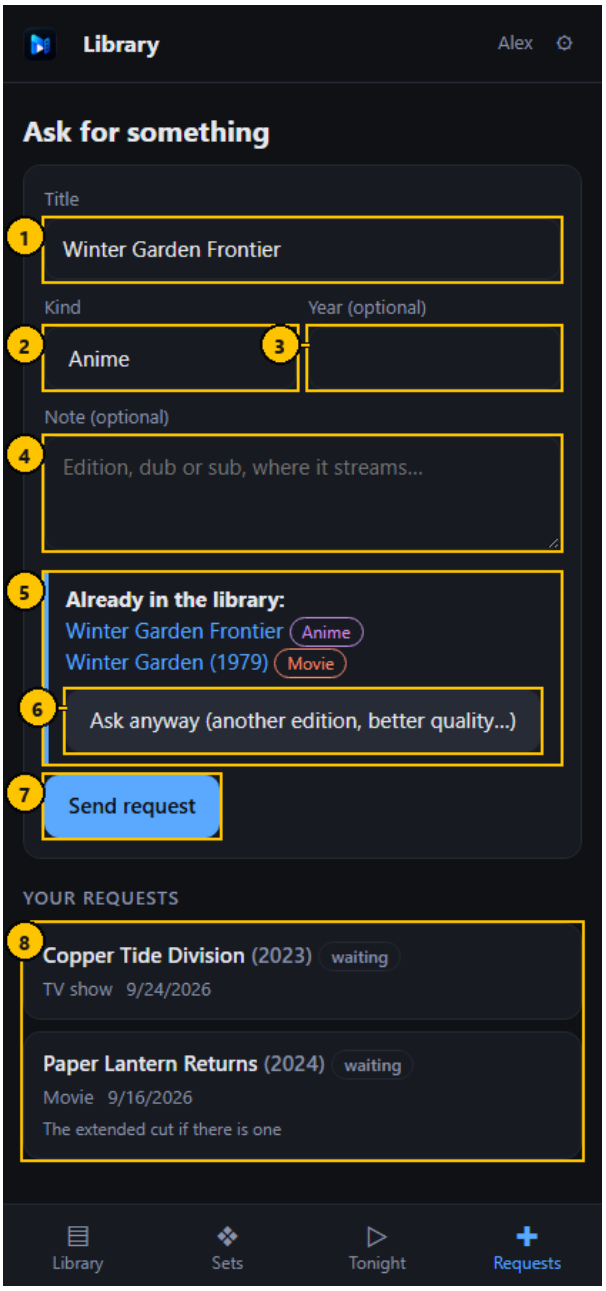


Figure 60. Family portal: Requests. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Title	Text field	What should be added.	Up to 120 characters	empty	–
2	Kind	Drop-down list	Movie, TV show, Anime or Other.	–	Movie	–
3	Year	Number field	The year of release.	1900 to 2100	empty	Optional.
4	Note	Text area	Edition, dub or sub, where it streams.	Up to 400 characters	empty	Optional.
5	Already in the library	Notice	Lists the matching titles, each a link.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Ask anyway	Button	Sends the request although the title exists.	–	–	–
7	Send request	Button	Sends the request.	–	–	–
8	Your requests	List	Each request with its status and the reply, if any.	–	–	–

Typical workflow

1. Type the title and choose the kind.
2. Tap "Send request".
3. If the title is already in the library the page says so; tap "Ask anyway" for another edition or a better copy.
4. Read "Your requests" for the status and any reply.

Features

- The request arrives in the administrator's Requests page under the name on the invite.

Edge cases

- Six requests an hour and twenty-five a day per invite.
- Only your own requests are listed.

Messages and what they mean

Message	Meaning and what to do
`That is a lot of requests; try again in an hour`	The hourly or daily limit was reached.
`Type the title`	The title is missing or too short.
`Your invite does not include this`	The invite was made without permission to request.

8.5 Family portal: a request with a lookup

The request form finds the show as you type: matches from TVmaze (TV) or AniList (anime) with a poster and year, so the request names the right thing.

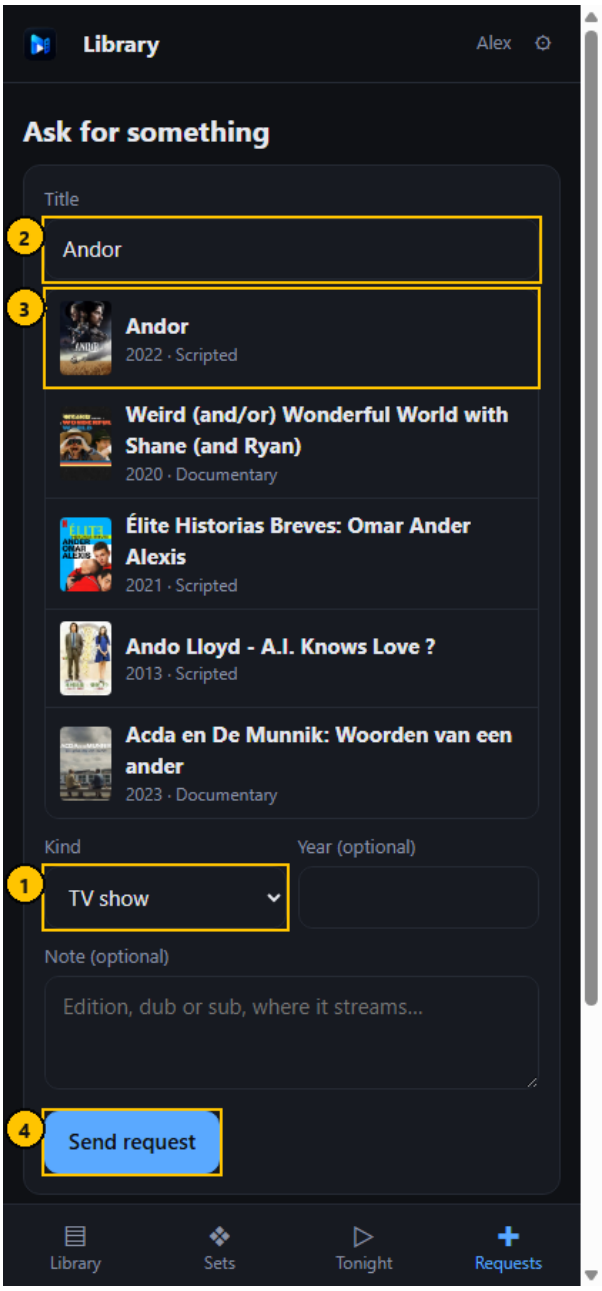


Figure 61. Family portal: a request with a lookup. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Kind	Dropdown	Movie, TV show, Anime or Other. Lookups run for TV and Anime.	–	Movie	–
2	Title	Text field	What should be added; typing here searches.	Up to 120 characters.	empty	–
3	Match	Row	Fills the title and year from that match.	–	–	Poster from TVmaze or AniList.
4	Send request	Button	Sends the request.	–	–	–

Typical workflow

1. Choose the kind first: TV show or Anime.
2. Type three or more letters of the title.
3. Tap the right match; the title and year are filled in.
4. Send the request.

Features

- Movies have no keyless free poster source, so a movie request stays as typed.
- Searches are limited to thirty a minute per invite.

Edge cases

- A match is only a help for typing; the request is still sent as the words in the fields.

Messages and what they mean

Message	Meaning and what to do
`Too many searches; wait a minute`	More than thirty lookups in a minute from this invite.

8.6 Family portal: Sets

The family portal's Sets tab: the same collections, read-only, with how much of each is in the library.

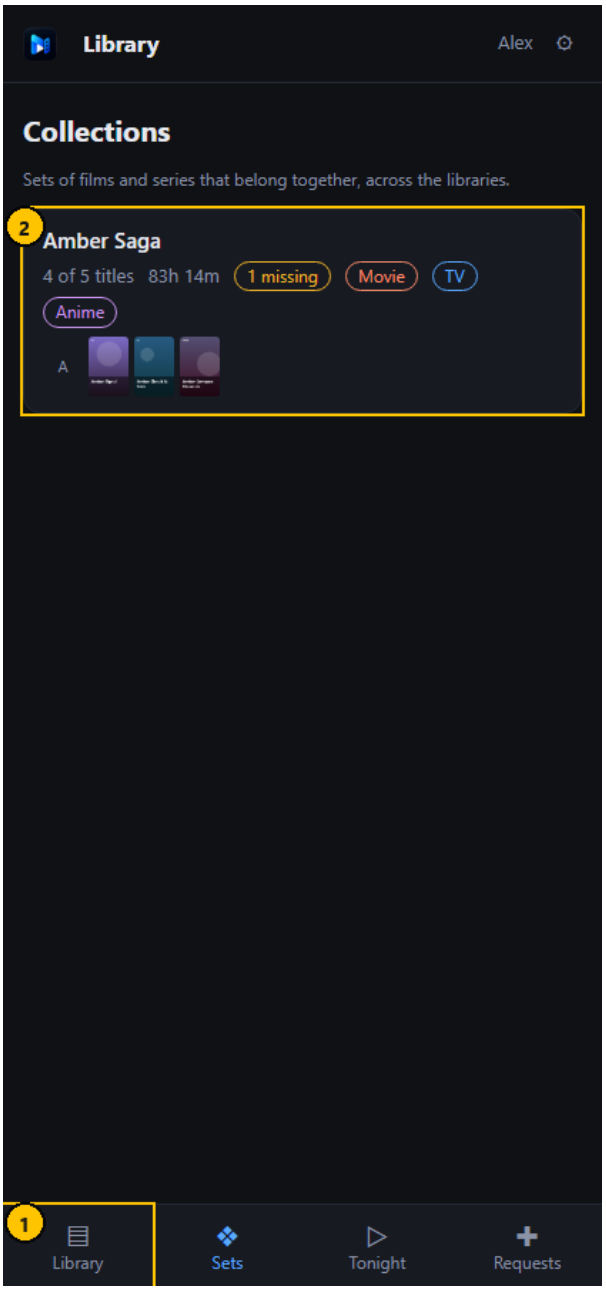


Figure 62. Family portal: Sets. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Tabs	Navigation	Library, Sets, Tonight, Requests.	–	–	–
2	Set	Row	Opens the set.	–	–	Counts, length and a strip of posters.

Typical workflow

1. Open Sets.
2. Tap a set to see its titles in order; tap a title to open it.

Features

- A title not in the library is listed greyed, so family can see what is still to come.

Edge cases

- Only invites that may browse see the tab.

8.7 Family portal: Settings

The visitor's own settings: the colour theme of this device, and forgetting the device.

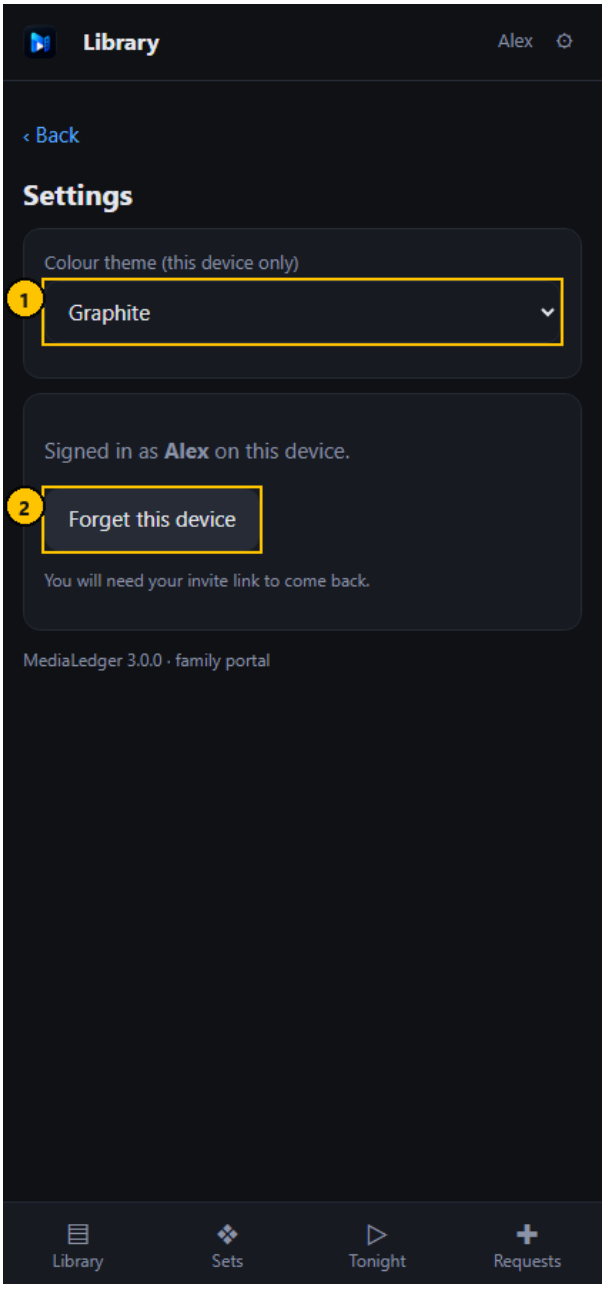


Figure 63. Family portal: Settings. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Colour theme	Drop-down list	Changes the colours on this device.	Eight themes	Graphite	–
2	Forget this device	Button	Signs this device out of the portal.	–	–	Asks first.

Typical workflow

1. Pick a theme.
2. Tap "Forget this device" to sign this device out.

Edge cases

- After forgetting the device, the invite link is needed to come back.

8.8 Portal admin: Requests

The owner's own page on the family portal, at the portal address followed by /admin. It lets an administrator deal with requests from anywhere without being on the home network. It is switched on with "Admin sign-in from outside" on the Family portal page.

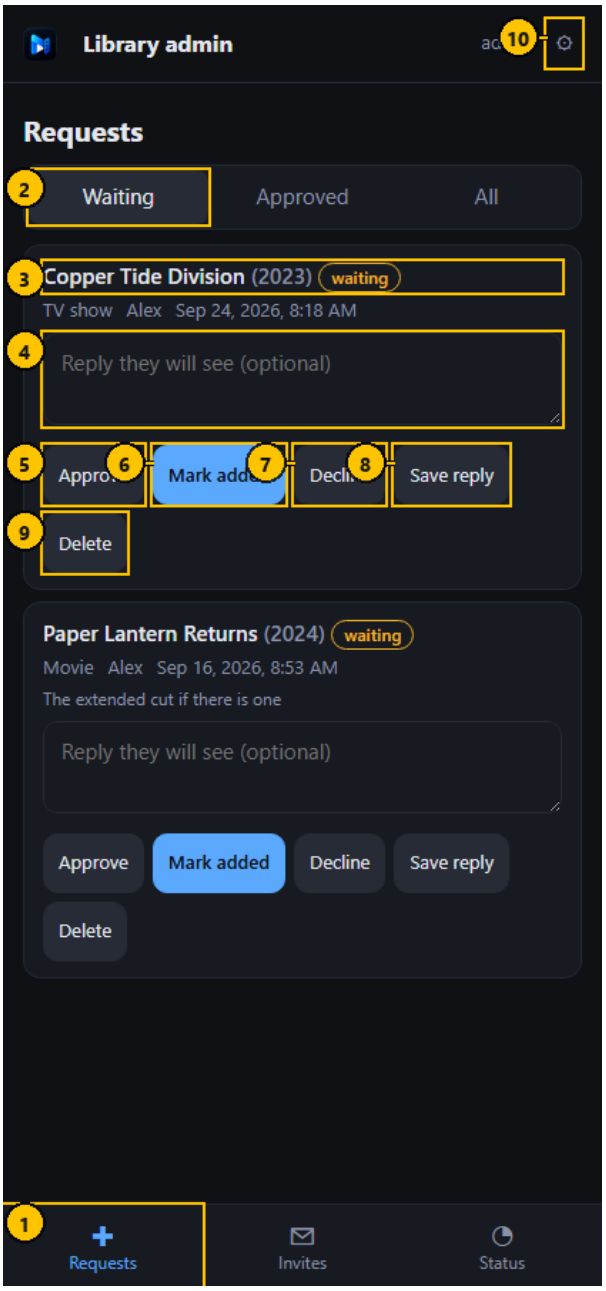


Figure 64. Portal admin: Requests. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Tabs	Navigation	Requests, Invites and Status.	–	Requests	–
2	Waiting, Approved, All	Button group	Which requests are listed.	–	Waiting	–
3	Request	Label	Title, year, kind, who asked and when, with their note.	–	–	–
4	Reply	Text field	A line the requester sees.	Up to 1,000 characters.	empty	Sent with the next button pressed.
5	Approve	Button	Marks the request approved.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Mark added	Button	Marks the request as now in the library.	–	–	–
7	Decline	Button	Marks the request declined.	–	–	–
8	Save reply	Button	Saves the reply without changing the status.	–	–	–
9	Delete	Button	Removes the request.	–	–	Asks first.
10	Account	Button	Shows who is signed in and the Sign out button.	–	–	–

Typical workflow

1. Open the portal address followed by /admin and sign in with an administrator account.
2. The Requests tab opens with the requests that are waiting.
3. Type a reply if you want one, then press Approve, Mark added or Decline.

Features

- The same password, lockout and two-factor code as the web application; standard accounts are refused.
- Sessions end after twelve hours, or one hour without use.
- Settings, renames, folders, files and logs do not exist here.

Edge cases

- Switching the option off on the Family portal page ends every session here at once.
- The person who asked sees the status and the reply on their own Requests tab.

Messages and what they mean

Message	Meaning and what to do
`Only an admin account can sign in here`	The account is a standard one.
`Too many attempts; wait fifteen minutes`	Twelve sign-in attempts from one address in fifteen minutes.
`Not available`	Admin sign-in from outside is switched off.

8.9 Portal admin: Invites

Creates and manages family invites from outside the home network.

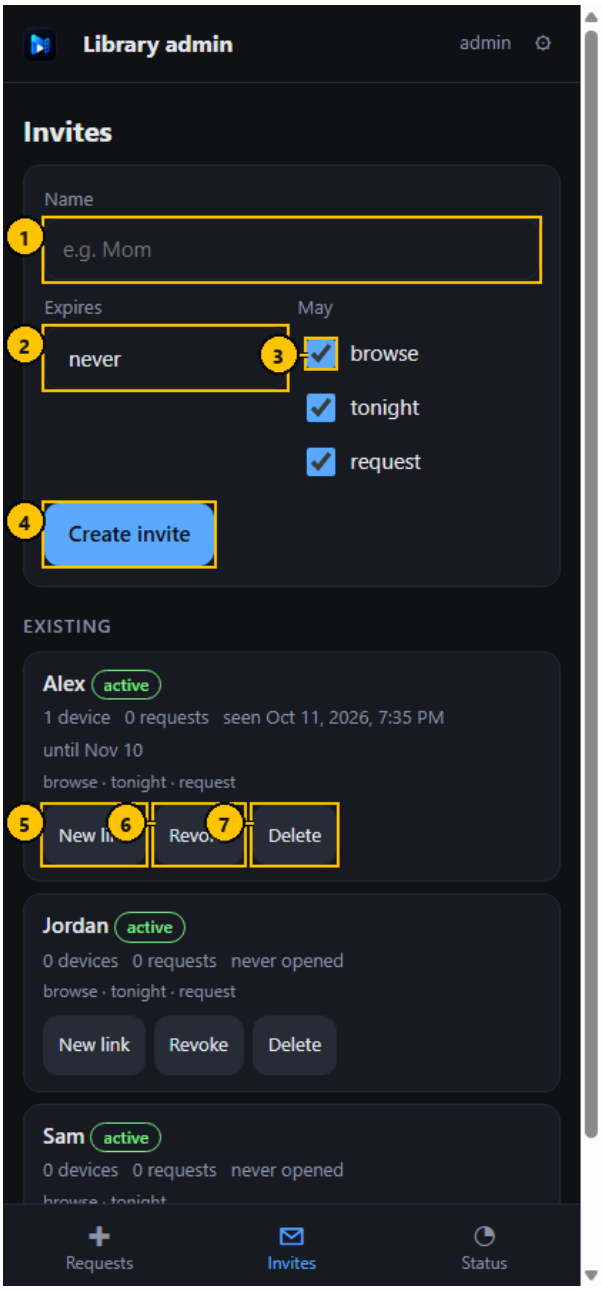


Figure 65. Portal admin: Invites. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Name	Text field	Who the invite is for.	Up to 40 characters.	empty	–
2	Expires	Dropdown	When the invite stops working.	never, 7 days, 30 days, 1 year	never	–
3	May browse, tonight, request	Checkbox	What the invite allows.	–	all ticked	Three checkboxes.
4	Create invite	Button	Makes the invite and shows its link and QR code.	–	–	–
5	New link	Button	Replaces the link of that invite.	–	–	Asks first.

#	Control name	Type	What it does	Inputs and limits	Default	Notes
6	Revoke	Button	Closes the invite.	–	–	Asks first.
7	Delete	Button	Removes the invite.	–	–	Asks first.

Typical workflow

1. Type a name, choose when the invite expires and what it allows.
2. Press Create invite. The link and its QR code are shown once.
3. Send the link, or let the person scan the code.

Features

- New link replaces a lost link; the old link and the devices that used it stop working.
- Revoke closes an invite and keeps it in the list. Delete removes it.

Edge cases

- An address must be set on the Family portal page at home before an invite can be made.
- Two active invites cannot share a name.

Messages and what they mean

Message	Meaning and what to do
`… already has an active invite; use New link on it`	There is an active invite with that name.
`Give the invite a name`	The name field is empty.

8.10 Portal admin: Status

How the server is doing, and a way to start its routine jobs, from outside the home network.

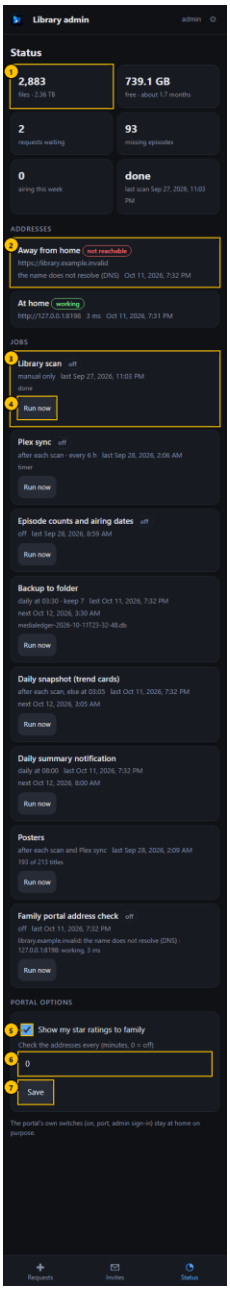


Figure 66. Portal admin: Status. The numbers match the table below.

Controls

#	Control name	Type	What it does	Inputs and limits	Default	Notes
1	Tiles	Tile	Files and size, free space, requests waiting, missing episodes, airing this week, last scan.	–	–	–
2	Address check	Status	Whether each portal address answers, how fast, and when it was checked.	–	–	–
3	Job	Status	A scheduled job: when it runs, when it last ran and what it said.	–	–	Overdue jobs are outlined.
4	Run now	Button	Starts that job.	–	–	–

#	Control name	Type	What it does	Inputs and limits	Default	Notes
5	Show my star ratings to family	Checkbox	Whether visitors see your ratings.	–	ticked	–
6	Check the addresses every	Number field	Minutes between address checks.	0 (off) to 1440	15	–
7	Save	Button	Saves the two options.	–	–	–

Typical workflow

1. Read the tiles and the address checks.
2. Press Run now beside a job to start it.
3. Change the two portal options and press Save.

Features

- Jobs: scan, Plex sync, metadata, posters, backup, snapshot, daily summary and the address check.
- File paths never appear here: a note that names a file shows the file name only.

Edge cases

- The portal's own switches (on, port, addresses, admin sign-in) can only be changed at home.

Messages and what they mean

Message	Meaning and what to do
`That job cannot be started from outside`	Only the listed routine jobs may be started here.

9. Short dialogs

These dialogs have one or two buttons and appear in the middle of a task. They have no screenshot of their own.

9.1 Confirm it is you (password again)

Web server only. Before an action that changes files or security settings, the server asks for your password again unless you confirmed within the last five minutes.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Password	Password field	Your password.	–	empty	–
–	Confirm	Button	Confirms and carries on with the action.	–	–	–

9.2 One at a time

Walks through the ticked files, showing the current and the proposed name of each and asking before every rename. Used by both rename pages.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Rename this file	Button	Renames the file shown and moves to the next.	–	–	–
–	Skip	Button	Leaves this file as it is and moves to the next.	–	–	–
–	Stop	Button	Ends the walk; files already renamed stay renamed.	–	–	–

9.3 Dry run result

Lists what a rename would do to each ticked file, with a tick or a cross and the reason for a cross. Nothing on the share changes.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Close	Button	Closes the result.	–	–	–

9.4 Batch items

Lists the files of one batch with the status of each: done, failed, aborted or undone.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Close	Button	Closes the list.	–	–	–

9.5 Undo batch

Confirms renaming the files of a batch back. Each file is checked first: still present, same size, original name free.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Cancel	Button	Closes without undoing.	–	–	–
–	Undo now	Button	Renames the files back.	–	–	–

9.6 Rename movie files, live

The confirmation before a live movie batch. It lists the files (the first sixty) and asks you to type RENAME, so a live run cannot be started by a stray click.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Type RENAME to confirm	Text field	Type the word RENAME.	Exactly RENAME	empty	The rename button stays disabled until it matches.
–	Cancel	Button	Closes without renaming.	–	–	–
–	Rename now	Button	Runs the live batch.	–	disabled	Enabled once RENAME is typed.

9.7 Movie batch result

Shows the outcome of a movie batch, dry or live: how many files were renamed, skipped and failed.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Close	Button	Closes the result.	–	–	–

9.8 Set source for selected

Confirms recording where the ticked copies came from, which the Source part of the name uses.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Cancel	Button	Closes without changing.	–	–	–
–	Apply	Button	Saves the source as a fix on each ticked file.	–	–	–

9.9 Ignore the other files

When several files would get the same name, keeps one and marks the others as ignored. The ignored files stay on disk.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Cancel	Button	Closes without changing.	–	–	–
–	Ignore them	Button	Marks the other files as ignored.	–	–	–

9.10 Desktop: connect to a server (Settings, Connections)

On the Windows desktop application only: a server address and a path mapping. Saving restarts the application, which then shows the server's pages instead of its own library; Explorer still opens a file's folder through the mapping. "Use this computer's library" switches back.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Server address	Text field	The server to show, for example https://medialedger.home.	http:// or https:// and a host, optionally a port.	empty	The server's certificate is remembered on first contact.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Path mapping	Table	Pairs of a path as the server names it and the same place as this PC reaches it.	–	–	Needed for Reveal in Explorer; otherwise the server's pages work without it.
–	Connect to the server	Button	Saves and restarts into server mode.	–	–	Asks first.
–	Use this computer's library	Button	Restarts with the local library.	–	–	Shown in server mode only.

9.11 Card settings (before version 2.0)

The colour-rule dialog of versions 1.9 to 1.12, opened by a gear on a tile. Version 2.0 replaced it with the card options dialog; the code remains but no gear opens it.

> This dialog is not reachable from the interface in version 3.0.0.

	Control name	Type	What it does	Inputs and limits	Default	Notes
–	Editor level	Drop-down list	Simple, Standard or Advanced.	–	Standard	–
–	Colour rule	Group	Amber and red thresholds.	–	–	Advanced only.

10. Common tasks from start to finish

10.1 Find and fill the gaps in a series

1. Open **Missing** and sort by Missing.
2. If the series is listed against the wrong title, press **Match**, search, and pick the right one.
3. If you joined the series late, press **Collect** and choose the first episode you want.
4. Open the series page to see exactly which episodes are red.
5. Add the files to the share, then press **Scan now**. The gaps close by themselves.

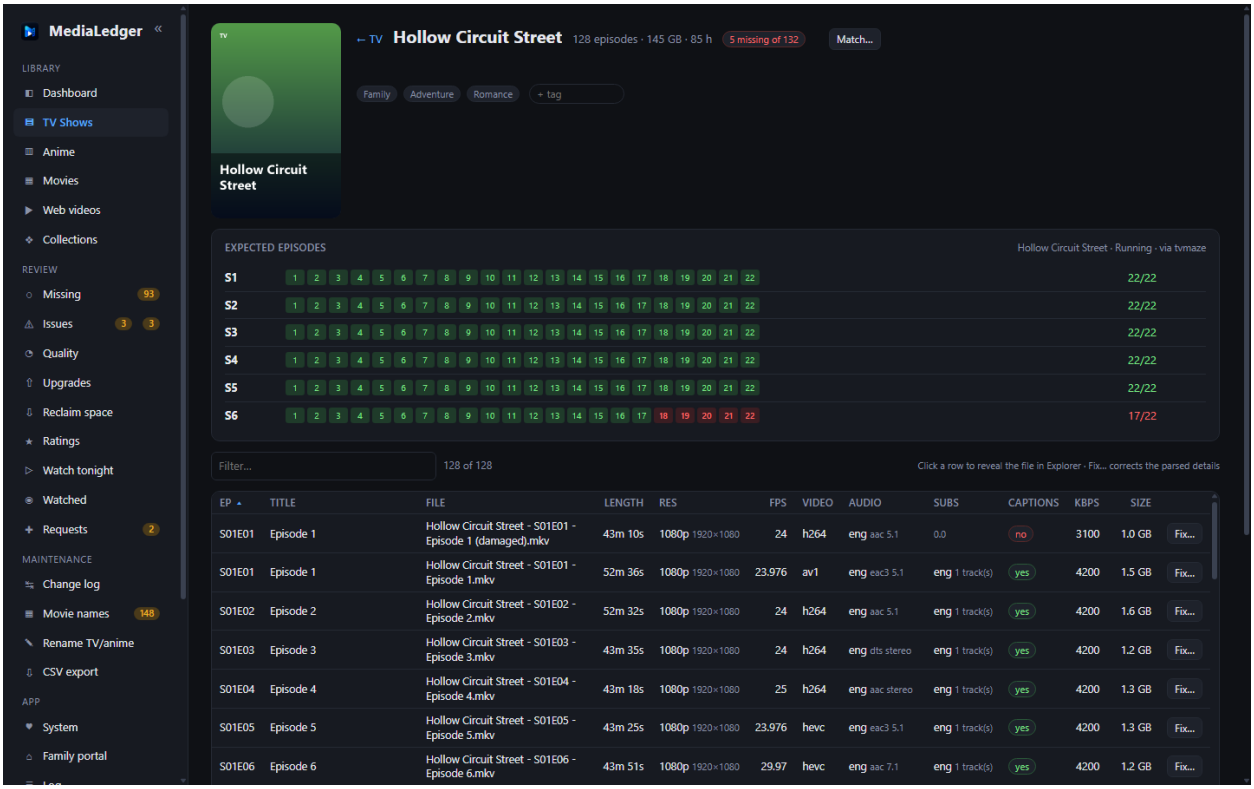


Figure 67. A series page: green is on hand, red is missing.

10.2 Tidy the names of a group of episodes

1. Open **Settings**, **Renaming**, switch renaming on, and save.
2. Open **Rename TV/anime**. Choose the name parts with the chips.
3. Set the number beside **Select next** to a small group, for example 5, and press it.
4. Press **Dry run** and read the result.
5. Press **Rename**, read the list in the confirmation, and press **Rename now**.
6. Press **Select next** again for the following group.
7. If something went wrong, press **Undo** on the batch in the Batches table.

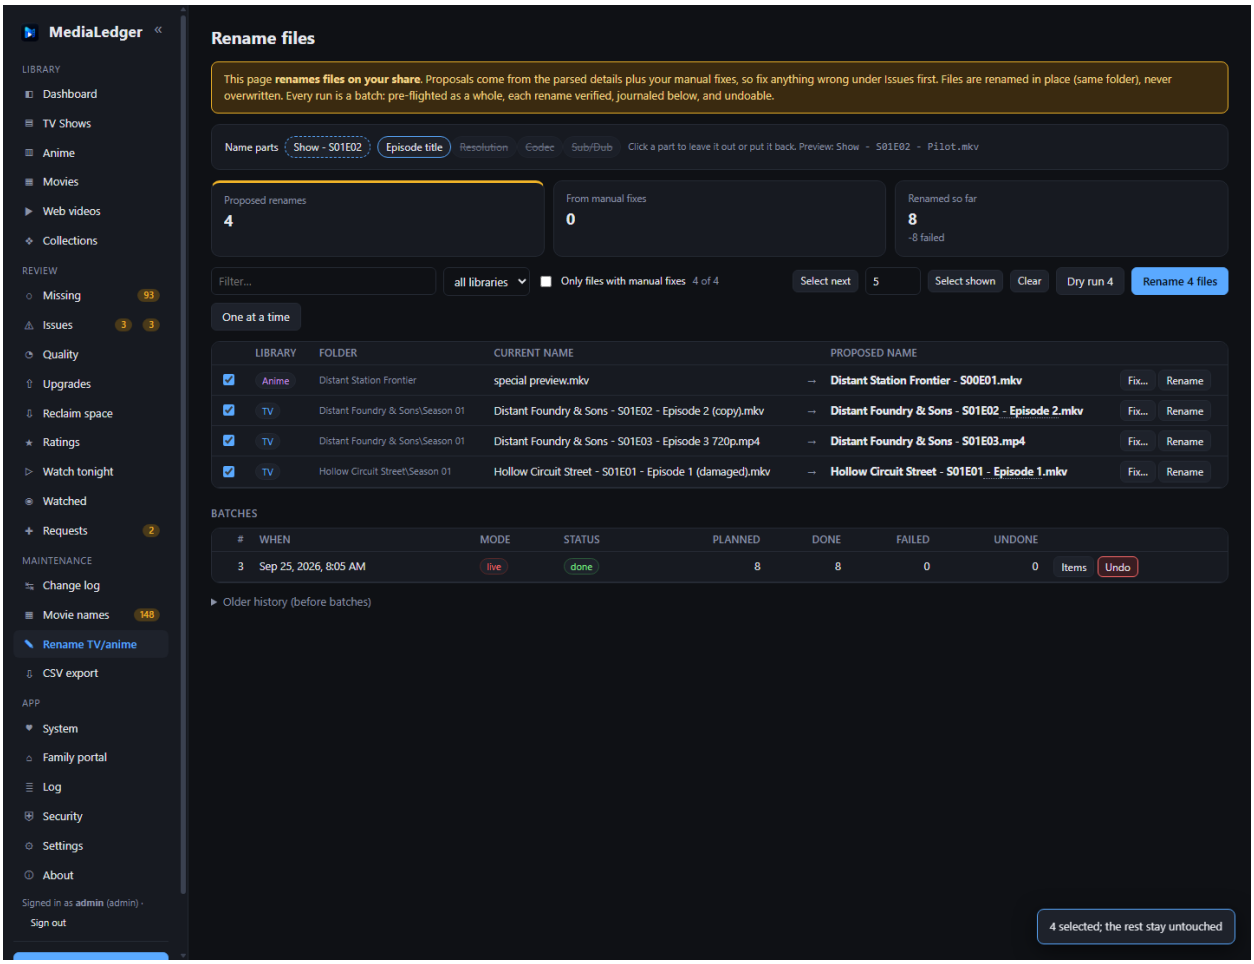


Figure 68. Five files ticked with Select next.

10.3 Arrange the Dashboard

1. Press **Edit dashboard**.
2. Remove the cards you never read with the cross on their handle.
3. Press **Add card** and add the ones you want.
4. Drag cards into order and set their width with S, M, L and XL.
5. Press the gear on a number tile to set when it turns amber and red (choose **Advanced** under "Options shown" first).
6. Press **Done**.

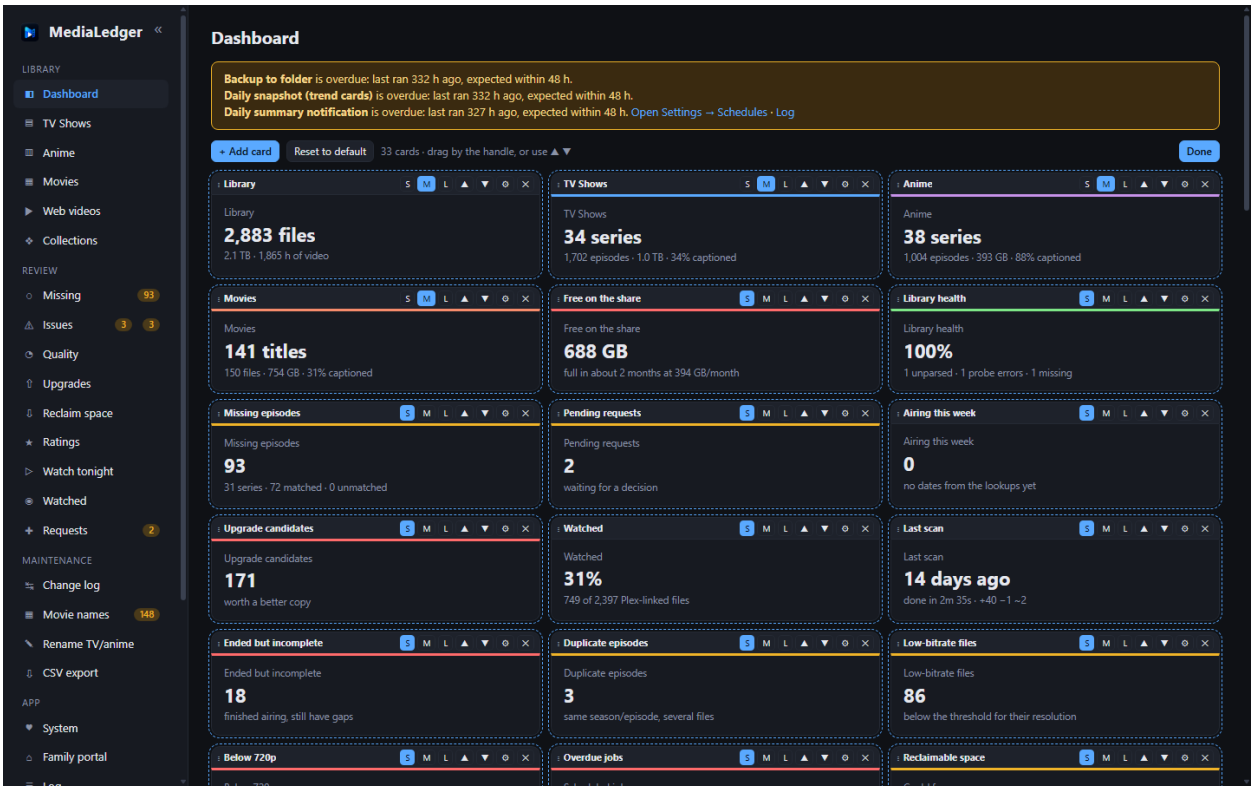


Figure 69. The Dashboard in edit mode.

10.4 Give a family member access

1. Open **Family portal**. Set the public address and press **Save**.
2. Tick **on** and press **Save**.
3. Type the name, choose an expiry, press **Create invite**.
4. Have them scan the QR code with their phone, or send them the link.
5. Their requests appear under **Requests**, marked with their name.
6. To end their access, press **Revoke** on their row.

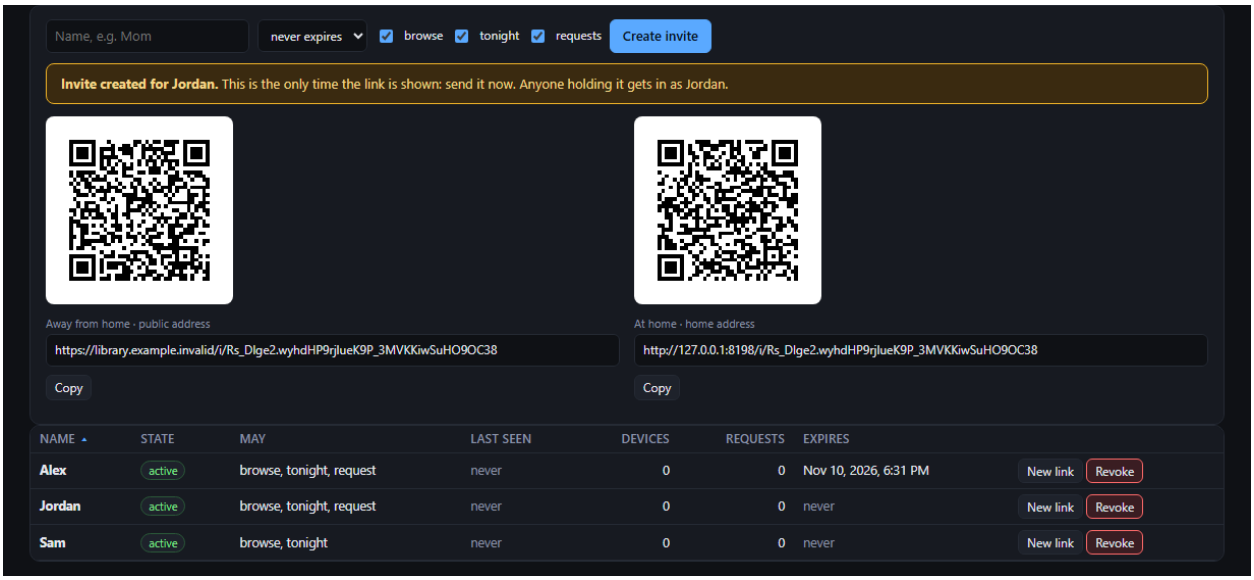


Figure 70. The invite with its QR code, shown once.

10.5 Back up, and restore

1. Open **Settings**, **Data**. Tick the daily backup, type the folder, press **Back up there now**.
2. Save the settings. A set is written every day at the time under **Schedules**.
3. To restore: press **Restore**, pick the set by date, choose whether settings and accounts should come back too.
4. Press **Restore and restart**. The application restarts on the restored data; the replaced files are kept in a pre-restore folder.

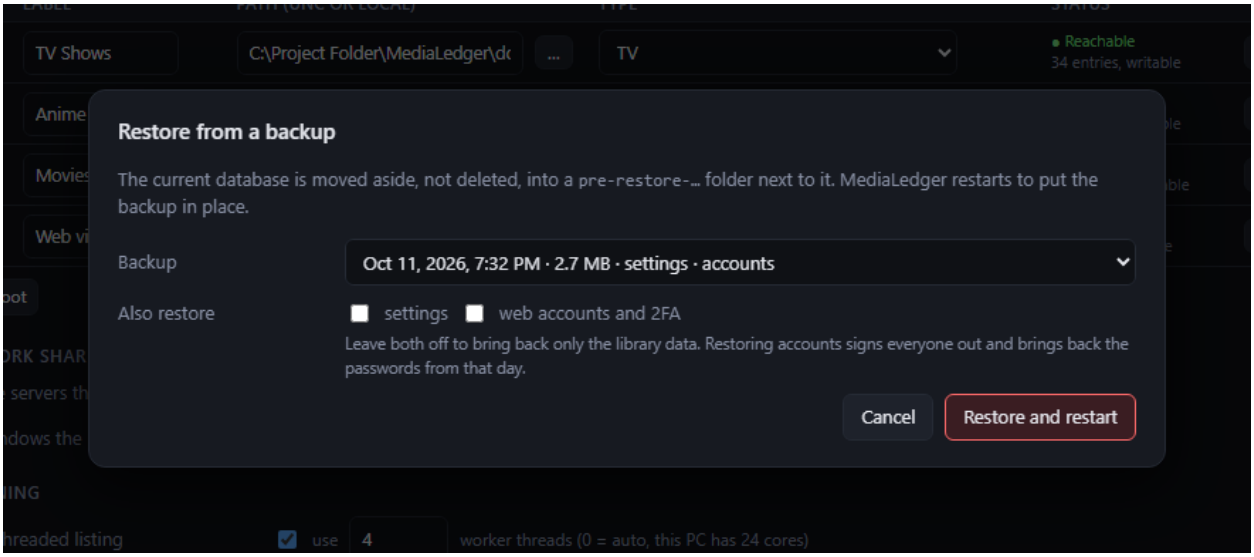


Figure 71. The Restore dialog.

10.6 Find out why something did not happen

1. Open **Settings**, **Schedules** and look for a red "overdue" badge and the result of the last run.
2. Open **Log**, type a word such as plex or backup, and switch to **problems only**.
3. Press **Run now** on the job and watch the log.

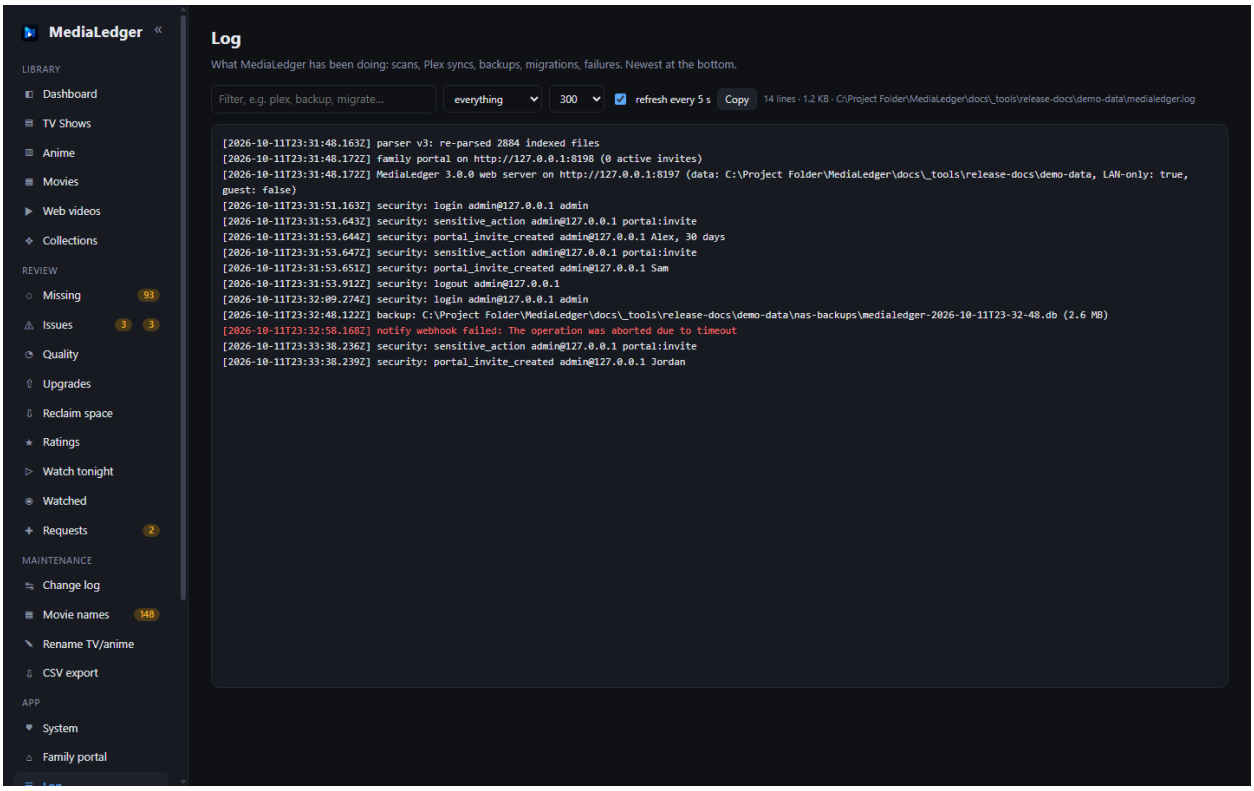


Figure 72. The Log page.

11. Settings reference

Every option on the Settings page and the pages that keep their own settings. "Stored in" says which file holds the value; all of them are in the data folder (`%APPDATA%\MediaLedger` on the desktop, `/var/lib/medialedger` on the Raspberry Pi) unless the browser is named.

Section	Option	What it does	Default	Stored in
Appearance and Library roots	Colour theme	Changes the colours of the application.	Graphite	The browser (local storage)
Appearance and Library roots	On	Whether this root is scanned.	on	`settings.json`
Appearance and Library roots	Label	The name shown for the root.	–	`settings.json`
Appearance and Library roots	Path	The folder to scan.	–	`settings.json`
Appearance and Library roots	Type	How the files in this root are read.	–	`settings.json`
Scanning, ffprobe, lookups and folder watch	Multi-threaded scan	Walks the roots with several threads.	on	`settings.json`
Scanning, ffprobe, lookups and folder watch	Threads	How many threads walk the folders.	0	`settings.json`
Scanning, ffprobe, lookups and folder watch	Parallel probes	How many ffprobe processes run at once.	8	`settings.json`
Scanning, ffprobe, lookups and folder watch	Probe unchanged files again	Measures every file again, even when its size and date are unchanged.	off	`settings.json`
Scanning, ffprobe, lookups and folder watch	Video extensions	Which file types count as video.	mp4, mkv, avi, mov, m4v, wmv, ts, webm, flv, mpg, mpeg	`settings.json`
Scanning, ffprobe, lookups and folder watch	Subtitle extensions	Which file types count as subtitles beside a video.	srt, ass, ssa, sub, idx, vtt, sup	`settings.json`
Scanning, ffprobe, lookups and folder watch	Ignore patterns	Files to skip.	*.crdownload, *.part, *.!qb, Thumbs.db, desktop.ini, .DS_Store	`settings.json`
Scanning, ffprobe, lookups and folder watch	ffprobe path	Where ffprobe is.	empty (found automatically)	`settings.json`
Scanning, ffprobe, lookups and folder watch	Look up expected episodes	Asks TVmaze and AniList how many episodes each series has.	on	`settings.json`
Scanning, ffprobe, lookups and folder watch	Check running series again after	Days before a series that is still airing is looked up again.	14	`settings.json`
Scanning, ffprobe, lookups and folder watch	Check the roots every	Minutes between reachability checks.	5	`settings.json`
Scanning, ffprobe, lookups and folder watch	Watch the folders	Starts a scan when files change.	off	`settings.json`
Scanning, ffprobe, lookups and folder watch	Wait for changes to settle	Seconds of quiet before that scan starts.	90	`settings.json`
Renaming, adult content, quality thresholds and CSV export	Renaming	Enables the Rename TV / anime page.	off	`settings.json`
Renaming, adult content, quality thresholds and CSV export	Adult titles in CSV files	Includes adult titles in exports.	off	`settings.json`

Section	Option	What it does	Default	Stored in
Renaming, adult content, quality thresholds and CSV export	Read adult files as	Whether files in an Adult root are read as anime or as TV.	Anime	`settings.json`
Renaming, adult content, quality thresholds and CSV export	Minimum bitrate	Below this bitrate a file of that resolution counts as low quality.	4K 6000, 1440p 3000, 1080p 1500, 720p 700, 576p 400, 480p 350, SD 250	`settings.json`
Renaming, adult content, quality thresholds and CSV export	CSV folder	Where exports are written.	empty (the exports folder beside the database)	`settings.json`
Renaming, adult content, quality thresholds and CSV export	Export after each scan	Writes the CSV files whenever a scan finishes.	on	`settings.json`
Renaming, adult content, quality thresholds and CSV export	Wanted subtitle languages	The languages a file should have subtitles in; the audit under Issues, Subtitles lists files without one.	eng	`settings.json`
Schedules	Plex sync every	Hours between syncs that do not wait for a scan.	6	`settings.json`
Schedules	Backup at	When the daily backup runs.	03:30	`settings.json`
Schedules	Keep	How many backup sets to keep.	7	`settings.json`
Schedules	Daily snapshot at	When the snapshot is taken if no scan has taken one that day.	03:05	`settings.json`
Schedules	Daily summary at	When the summary notification goes out.	08:00	`settings.json`
Schedules	In-app scan timer	Scans on a timer while the application is open.	off	`settings.json`
Schedules	Every	Hours between those scans.	24	`settings.json`
Schedules	Windows scheduled task at	When the task runs each day.	03:00	`settings.json`
Data, backups and posters	Daily backup to a folder	Copies a backup set to the folder once a day.	off	`settings.json`
Data, backups and posters	Backup folder	Where the sets go.	empty	`settings.json`
Data, backups and posters	Fetch posters	Fetches posters after each scan and Plex sync.	on	`settings.json`
Data, backups and posters	Also from AniList and TVmaze	Uses the online services for series Plex does not have.	on	`settings.json`
Data, backups and posters	Width	The width posters are fetched at.	300	`settings.json`
Data, backups and posters	Posters folder	Where posters are kept.	empty (the posters folder beside the database)	`settings.json`
Updates and notifications	Automatic updates	Checks GitHub at launch and every six hours.	on	`settings.json`
Updates and notifications	GitHub token	Only needed if the repository is made private.	empty	`settings.json`
Updates and notifications	Webhook address	Where event messages are sent.	empty	`settings.json`
Updates and notifications	E-mail on	Sends events by e-mail.	off	`settings.json`
Updates and notifications	Mail server	The outgoing mail server.	empty	`settings.json`
Updates and notifications	Port	The port of the mail server.	587	`settings.json`
Updates and notifications	Account	The account to send from.	empty	`settings.json`

Section	Option	What it does	Default	Stored in
Updates and notifications	Password	The password of that account.	empty	`settings.json`
Updates and notifications	Recipient	Who receives the e-mail.	empty	`settings.json`
Updates and notifications	Events	Which events are sent: new request, daily summary, backup failed, scheduled job overdue, family portal not reachable, episodes airing.	All ticked	`settings.json`
Plex	Plex address	The address of the Plex server.	http://192.168.1.204:32400	`settings.json`
Plex	Plex token	The token that lets MediaLedger read from Plex.	empty	`settings.json`
Plex	Paste the XML address	Takes the token out of an address copied from Plex.	empty	`settings.json`
Plex	Sync after each scan	Runs a sync whenever a scan finishes.	off	`settings.json`
Plex	Path mapping	How a path as Plex reports it translates to the path MediaLedger knows.	Worked out on the first sync	`settings.json`
Plex	Webhook enabled	Accepts reports from Plex.	off	`settings.json`
Family portal (administration)	Name	Who the invite is for. Requests arrive under this name.	empty	`portal.json`
Family portal (administration)	Expires	How long the invite works.	never expires	`portal.json`
Family portal (administration)	May browse, use tonight, request	What the person may do.	All three	`portal.json`
Family portal (administration)	Public address	What people away from home open.	empty	`portal.json`
Family portal (administration)	Home address	A name served on your own network.	empty	`portal.json`
Family portal (administration)	Portal on	Starts or stops the portal.	off	`portal.json`
Family portal (administration)	Port	The port the portal listens on.	8090	`portal.json`
Family portal (administration)	Reachable from	This machine only, or the whole network.	this machine only	`portal.json`
Family portal (administration)	Check the addresses every	Minutes between automatic checks.	15	`portal.json`
Family portal (administration)	Show my star ratings	Whether the portal shows your stars.	on	`portal.json`
Security	Current password	Your password now.	empty	`web.json`
Security	New password	The password to change to.	empty	`web.json`
Security	LAN only	Refuses every address outside your network.	on	`web.json`
Security	Sign out when idle	Minutes without activity after which a session ends.	0	`web.json`
Security	Guest access	Lets people look without signing in, read-only.	off	`web.json`
Security	Role	The role of that user.	–	`web.json`
Security	New user	The name of the account to add.	empty	`web.json`

Section	Option	What it does	Default	Stored in
Card options dialog	Title	Replaces the name printed on the card.	The name from the catalog	Account preferences: `web.json` (web server) or `settings.json` (desktop)
Card options dialog	Size	The width of the card.	Per card	Account preferences: `web.json` (web server) or `settings.json` (desktop)
Card options dialog	Amber threshold	The value at which the tile turns amber.	Per card	Account preferences: `web.json` (web server) or `settings.json` (desktop)
Card options dialog	Red threshold	The value at which the tile turns red.	Per card	Account preferences: `web.json` (web server) or `settings.json` (desktop)
Card options dialog	Options shown	How much this dialog offers.	Standard	Account preferences: `web.json` (web server) or `settings.json` (desktop)

11.1 What is remembered in the browser only

What	Where it is set
Colour theme	Settings, Appearance (and the portal's Settings page)
Table or poster wall	The Posters button of any list
Trend period of the Dashboard	The period list above the cards
Filters of Watch tonight, Watched and Reclaim space	On those pages
The number beside "Select next"	The rename pages

12. Keyboard shortcuts

MediaLedger is operated with the mouse or by touch. It defines no application-wide shortcuts and no menu of its own; the keys below work inside fields and dialogs.

Key	Where	What it does
Escape	Any dialog	Closes the dialog without saving.
Enter	Tag field on a series or movie page	Adds the typed tag.
Enter	Search words in the Match dialog	Starts the search.
Enter	Path in the folder browser	Opens the typed path.
Enter	Sign-in and confirmation dialogs	Submits the dialog.
Alt	Desktop application	Shows the standard Electron menu bar, which is hidden by default. MediaLedger defines no menu of its own and no application-wide shortcuts.

Standard browser and Windows keys apply as usual: Tab moves between fields, Space ticks a box, and in the desktop application F11 and the window keys behave as in any window.

Not present	Note
Context menus	None. No right-click menu is defined anywhere in the renderer.
Toolbars	No application toolbar. Pages carry their own filter row, listed with each page.
Application menu	None defined. The desktop window hides the default Electron menu bar.
Light theme	None. All eight colour themes are dark.

13. Troubleshooting and frequently asked questions

Question or symptom	Answer
The roots show "Share not mounted" on the Raspberry Pi.	The file server answers but the share is not mounted, usually after a restart. From version 1.12.1 the application nudges the mount itself and a watchdog mounts it within a minute. If it stays red, run `sudo mount /mnt/media` on the Pi and read the message.
The site cannot be reached by its name, but works by address.	The name is not being resolved. A virtual private network on your computer often sends lookups to its own servers, which do not know names on your network. Add the name to the hosts file of the computer, or point the network at your router for lookups.
The Watched page is empty.	Play history is pulled during a Plex sync. Run one under Settings, Plex, and set the sync timer under Schedules.
The Missing page is dominated by one very long series.	Press Collect on that series and choose "from an episode onward", or mute it.
A movie shows up that is really an episode.	It is listed under Issues, Problems, "Episodes filed under Movies". Move the file to a TV or anime folder.
Plex reports hundreds of unmatched files.	Read the table under the last sync. "File is not in a scanned root" means a Plex library MediaLedger does not scan; "no path mapping covers this folder" means a mapping is missing.
Create invite is greyed out.	Set a public or home address on the Family portal page and save first.
The invite link says the site cannot be found.	A new Tailscale address takes about fifteen minutes to appear on the internet. The tiles on the Family portal page tell you when it works.
Windows warns about the installer.	The installer is not code-signed. Choose More info, then Run anyway.
Editing the Dashboard is slow.	Update to version 2.1.1 or newer, which no longer reloads the data on every edit.
I forgot the web password.	On the Raspberry Pi run `sudo medialedger --set-password`.
How do I move to a new computer or a new card?	Install MediaLedger, then use Restore with your latest backup set and tick settings and accounts.
Does MediaLedger ever delete or move my media?	No. It renames files only on the two rename pages, only when you switch renaming on, and every rename can be undone. It never deletes media.
Does anything leave my network?	Episode lookups go to TVmaze and AniList, poster lookups to the same two, and the update check to GitHub. Nothing about your library is sent; the lookups contain only series names.

13.1 Every message in one place

Message	Where	Meaning and what to do
`Wrong user name or password`	Sign-in dialog (web server)	The pair did not match an account. The attempt is counted towards the lockout.
`Too many failed attempts; this address is locked for 15 minutes`	Sign-in dialog (web server)	Wait, or sign in from another address. The lockout is per address, not per account.
`No account exists yet. On the server run: sudo medialedger --set-password`	Sign-in dialog (web server)	The server has never had a password set. Run the command on the Raspberry Pi.
`Enter the 6-digit code from your authenticator`	Sign-in dialog (web server)	The password was right; two-factor codes are on and the code is the second step.
`<job> is overdue: last ran N h ago, expected within N h`	Dashboard	A scheduled job has not run for twice its interval. Open Settings, Schedules.
`Family portal: <address> is not reachable`	Dashboard	The server could not open its own portal address twice in a row. Open Family portal.

Message	Where	Meaning and what to do
`MediaLedger <version> is available`	Dashboard	Web server only. Run the update command on the Raspberry Pi.
`Layout not saved: <reason>`	Dashboard, edit mode	The arrangement could not be stored on the server. It is kept in this browser and saved on the next change.
`HTTP 403 from graphql.anilist.co`	Missing episodes	AniList refused the request, usually because too many were sent. It is tried again on the next lookup.
`no match`	Missing episodes	Neither service had a series with a close enough name. Use Match.
`Nothing found`	Match dialog	The service had no series for those words. Shorten them or try the other service.
`moov atom not found`	Issues: Problems	ffprobe could not read the file: it is incomplete or damaged.
`no season or episode found in the name`	Issues: Problems	The name has no recognisable marker. Use Fix.
`None of these titles is linked to Plex on this machine`	Reclaim space	There is no play data behind the list. Sync Plex here, or open the page on the server that does.
`Nothing matches; loosen the filters`	Watch tonight	No title passes every filter.
`Nothing here yet`	Watched	No history has been pulled. Run a Plex sync.
`Renaming is off`	Movie names	Switch it on under Settings, Renaming.
`target exists`	Movie names	A file with the proposed name is already there. Nothing is overwritten.
`size changed since the scan`	Movie names	The file was altered after it was scanned. Scan again.
`scan skipped: rename batch in progress`	Rename TV / anime	A scan was due while a batch was running. It runs at the next opportunity.
`not reachable`	System	A root or disk could not be read. Check the mount.
`Set a public or home address first`	Family portal (administration)	An invite needs an address to build its link.
`<name> already has an active invite; use New link on it`	Family portal (administration)	One active invite per name.
`port N is already in use`	Family portal (administration)	Another program listens on that port. Choose another.
`the name does not resolve (DNS)`	Family portal (administration)	The address check could not look the name up. A new Tailscale address takes about fifteen minutes to appear.
`a different MediaLedger portal answers on this address`	Family portal (administration)	The name points at another server.
`Password must be at least 8 characters`	Security	Choose a longer password.
`Please re-enter your password for this action`	Security	The action is sensitive and your last confirmation is too old.
`LAN only`	Security	The request came from outside your network and was refused.
`That code is not right`	Two-factor setup	The six digits did not match. Check the clock of the phone and try the next code.
`Share not mounted`	Settings: Appearance and Library roots	The file server answers but the share is not mounted. On the Raspberry Pi: sudo mount, or wait a minute for the watchdog.
`does not answer on port 445`	Settings: Appearance and Library roots	The file server is off or unreachable.
`ffprobe not found`	Settings: Scanning, ffprobe, lookups and folder watch	Press the download button, or point the path at an existing ffprobe.
`No backup folder set`	Settings: Data, backups and posters	Type a folder before backing up.

Message	Where	Meaning and what to do
`The posters folder is not writable`	Settings: Data, backups and posters	The folder does not exist or the application may not write there. On the Raspberry Pi, mount the share for the medialedger user.
`Copied backup is empty`	Settings: Data, backups and posters	The copy failed; the folder may be full or read-only.
`No webhook or e-mail configured`	Settings: Updates and notifications	Set one before testing.
`Plex rejected the token (401)`	Settings: Plex	The token is wrong or has been revoked. Take a new one.
`Could not reach Plex`	Settings: Plex	The address is wrong or the server is off.
`The backup failed its integrity check`	Restore from a backup dialog	The file is damaged. Choose another set.
`The backup is schema vN; this build understands up to vM`	Restore from a backup dialog	The backup is from a newer version.
`A scan is running; restore when it has finished`	Restore from a backup dialog	Wait for the scan.
`The server refused the username or password`	Settings: Network shares (Raspberry Pi server)	The file server answered but did not accept the sign-in. Check both and that the account may read the share.
`… did not answer as a file server. Check the address and that file sharing (SMB) is on`	Settings: Network shares (Raspberry Pi server)	Nothing answered at that address, or it does not share files.
`The share helper did not answer`	Settings: Network shares (Raspberry Pi server)	The helper that does the connecting is not running on the Pi. Run the command the message names.
`That share was not connected from here`	Settings: Network shares (Raspberry Pi server)	The share was made by the installer; remove it in /etc/fstab.
`The server refused the username or password`	Connect a network share dialog	Wrong sign-in, or the account may not use that share.
`The server has no share with that name`	Connect a network share dialog	Typed by hand and misspelt, or removed on the file server.
`The server did not answer. Check the address and that it is switched on`	Connect a network share dialog	Nothing answered at that address.
`The server address must be an IP address or a name, like 192.168.1.204 or nas.home`	Connect a network share dialog	The address field holds something else, for example a path with slashes.
`Connect a share first (step 1)`	Welcome guide	Find them for me has nowhere to look yet.
`No folders with the usual names. Use Browse…`	Welcome guide	The folders are named differently; pick them by hand.
`Saved, but check step 3`	Welcome guide	At least one folder could not be read. Step 3 says which.
`There is already a collection called …`	Collections	Names are unique, regardless of case.
`Give the collection a name`	Collections	The name field is empty.
`Nothing found that is not already in a collection.`	Collections	Every set the finder can see is made already.
`Pick a title from the library or type one`	A collection	The add box or placeholder dialog was empty.
`No such collection`	A collection	It was deleted; the list is reloaded.
`Could not reach GitHub`	About	No connection, or GitHub is limiting requests. Try later.
`Invite needed`	Family portal: Library	Open the invite link on this device.
`Too many requests; wait a minute`	Family portal: Library	The portal limits how fast one device may ask.
`Not in the library`	Family portal: a series	The title was removed since the list was loaded.

Message	Where	Meaning and what to do
`That is a lot of requests; try again in an hour`	Family portal: Requests	The hourly or daily limit was reached.
`Type the title`	Family portal: Requests	The title is missing or too short.
`Your invite does not include this`	Family portal: Requests	The invite was made without permission to request.
`Too many searches; wait a minute`	Family portal: a request with a lookup	More than thirty lookups in a minute from this invite.
`Only an admin account can sign in here`	Portal admin: Requests	The account is a standard one.
`Too many attempts; wait fifteen minutes`	Portal admin: Requests	Twelve sign-in attempts from one address in fifteen minutes.
`Not available`	Portal admin: Requests	Admin sign-in from outside is switched off.
`… already has an active invite; use New link on it`	Portal admin: Invites	There is an active invite with that name.
`Give the invite a name`	Portal admin: Invites	The name field is empty.
`That job cannot be started from outside`	Portal admin: Status	Only the listed routine jobs may be started here.

14. Glossary

Term	Meaning
Root	A folder MediaLedger scans, with a type: TV, Anime, Movies, Web videos or Adult.
Scan	Walking the roots to find files, then measuring new and changed files with ffprobe.
Probe	Reading the technical details of one file with ffprobe: length, resolution, codecs, languages.
Match	The online listing a series is compared with.
Locked match	A match you chose; automatic lookups leave it alone.
Collecting policy	What counts as missing for one series: everything, from an episode onward, or nothing.
Fix	A correction of how a file is read, stored in the database and applied on every scan.
Batch	One run of the rename tool over a group of files, checked as a whole, recorded and undoable.
Dry run	A batch that records what would happen and changes nothing.
Snapshot	One row a day describing the library, from which the trend cards are drawn.
Card	One element of the Dashboard.
Backup set	The files of one backup, sharing a date stamp: database, settings, and on the web server the accounts and portal files.
Invite	Permission for one person to use the family portal, given as a link.
Family portal	The separate read-only site for invited people.
Role	What an account on the web server may do: administrator, standard or guest.
Two-factor codes	Six-digit codes from an authenticator application, asked for after the password.
Webhook	An address another program calls when something happens.
Reverse proxy	A program such as Caddy that receives requests for several names on one machine and hands each to the right service.
Sub, dub, dual	Original audio with subtitles; audio in your language; both audio tracks present.
Square-root scale	A chart scale on which a small value is still visible beside a large one. The printed numbers are exact.